


CODED TOOLS  
 NOS. 378A TO 386B

→ TOOL, 378A

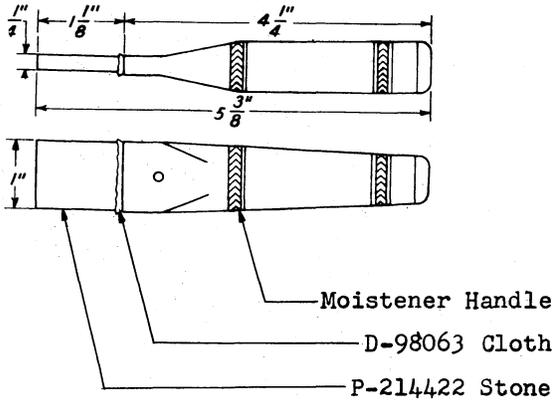


Friction surface restorer.

Replaces friction surface restorer R-2130.

For use on drives of power driven rotary selectors and A and B type sequence switches.

TOOL, 379A

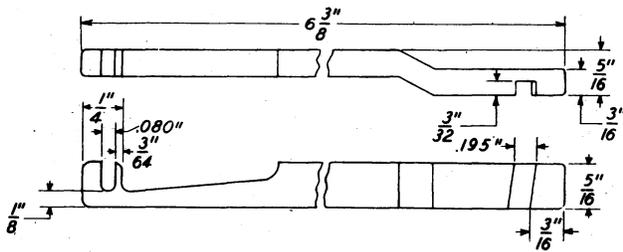


Adjuster.

Replaces the Nos. 233 and 301 tools and adjuster R-63773.

For use on helical spring type clutches and 200 and 206 type selectors.

TOOL, 380A

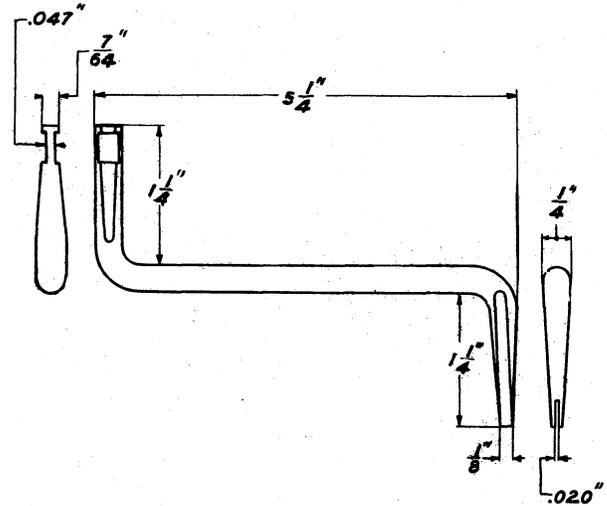


Spring adjuster.

Replaces spring adjuster R-55760.

For use on panel multiple brushes.

→ TOOL, 382A

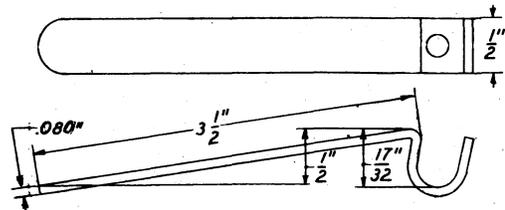


Trip rod holder.

For use on 4 and 14 type trip rods.

SECTION A706.024

→ TOOL, 384A

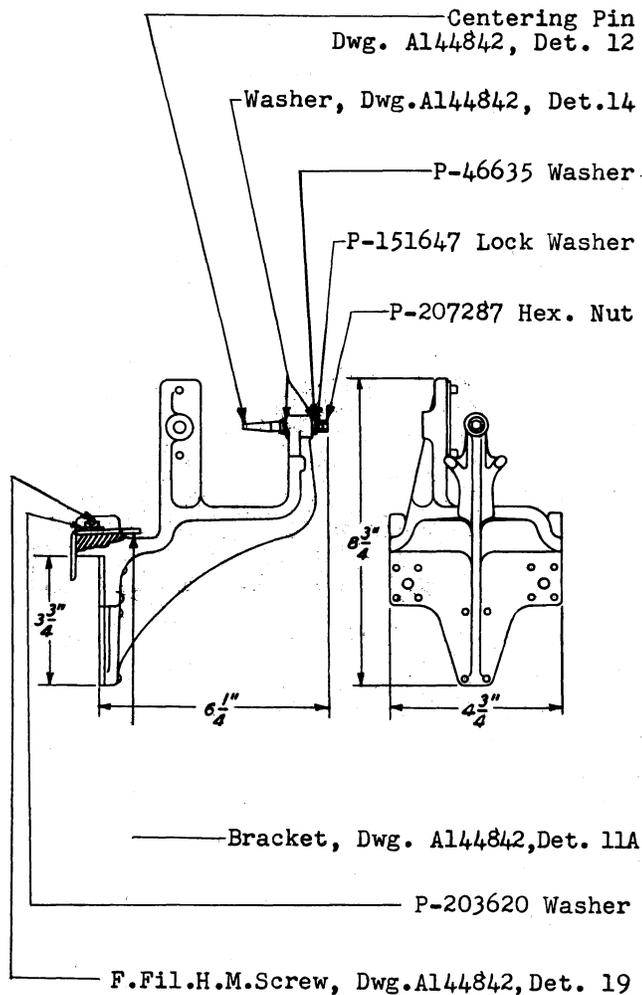


Portable plug cleaner.

Consists of a bracket with an insulated tapered pin for holding a cleaning cord and centering the plugs; a P-243641 hank (48 feet) of No. 4 solid braid white cotton cord and two wood cord adjusting balls, Graybar List No. 4635.

For use in conjunction with the Nos. 385A, 385B and 385C tools, in cleaning plugs.

Bell Telephone Laboratories, Inc.

→ TOOL, 385A  
→ TOOL, 385B  
→ TOOL, 385C

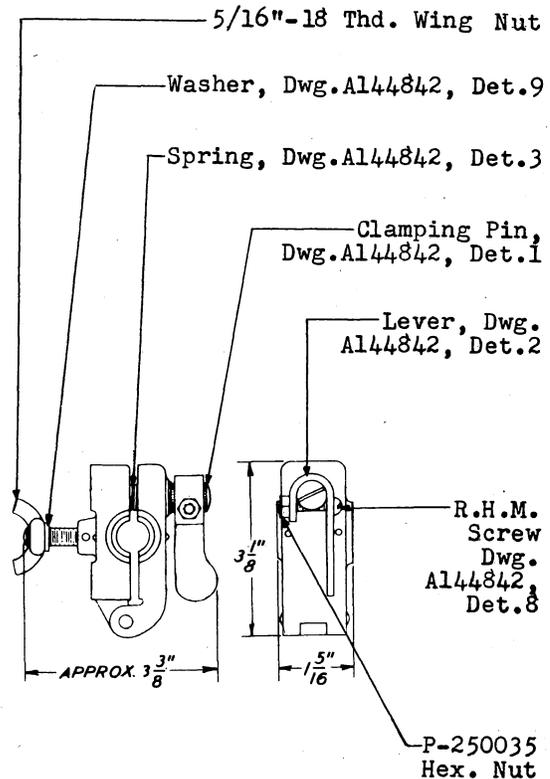

Plug chucks.

These tools are for use in conjunction with the No. 384A tool for holding plugs while cleaning. The No. 385A tool is for holding 47 type plugs, the No. 385B tool is for holding 137, 152 and 289 type plugs and the No. 385C tool is for holding 109 and 110 type plugs.

→ TOOL, 386A      Manufacture Discontinued.  
→ TOOL, 386B      Manufacture Discontinued.