


CODED TOOLS

NO. 567A TO 583A

TOOL, 567A Manufacture Discontinued.

Replaced by the No. 567B tool.

TOOL, 567B

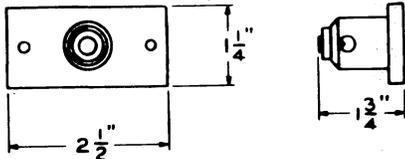


Pad Assembly Tool

Replaces the No. 567A tool.

For assembling No. 101A pads to No. 104A or 104B adapters.


TOOL, 568A

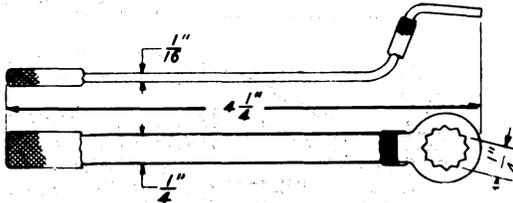

1/4" 12 Point Offset Box Wrench

For use on 263- and 264-type relays.

TOOL, 569A

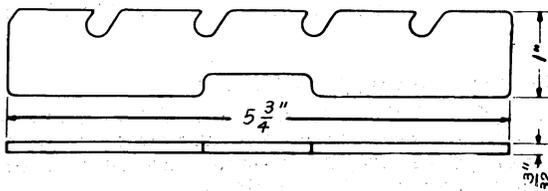


Spring Support

Replaces the No. 543A tool.

For use on 245-, 254, 263- and 264-type relays.


TOOL, 570A

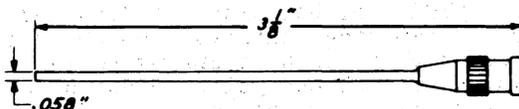

Straight Nozzle. This tool forms part of the No. 1003A tool kit and No. 431A tool.


For general use in lubricating.

TOOL, 571A

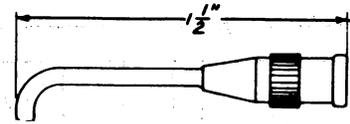

Curved Nozzle. This tool forms part of the No. 1003A tool kit.


TOOL, 572A

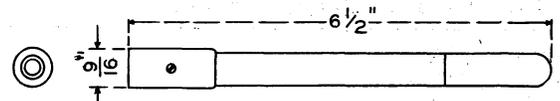

Test Probe

For use with 1A Fault Locator Test Set


TOOL, 573A

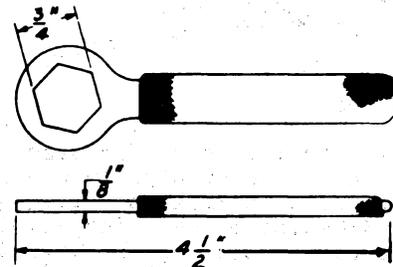

3/4" Hex. Single End Box Wrench

For general use.


TOOL, 574A

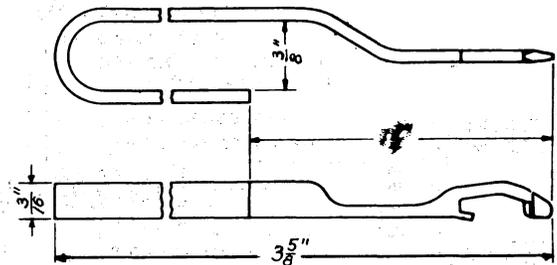

Tab Depressor

For checking spring pressure on 304-, 324- and similar type switches.


TOOL, 575A

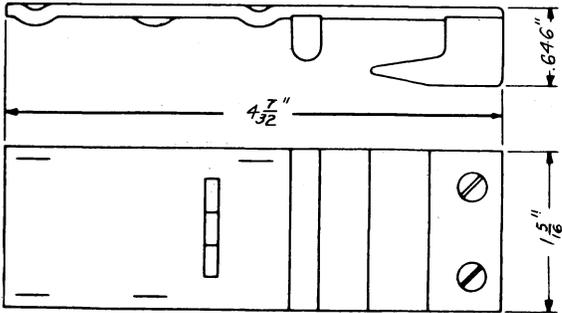

Feeder Brush Aligner

For replacing feeder brushes in Nos. 10-, 11-, 26- and 27-type banks.


- TOOL, 576A
- TOOL, 576B
- TOOL, 576C

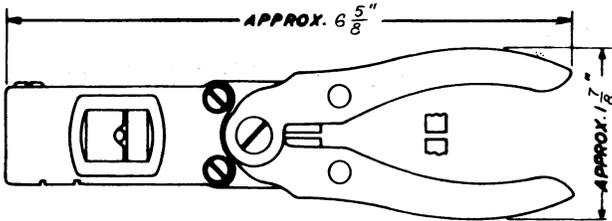

Cord Tip Press

The No. 576A tool is used for placing the Nos. 132 and 133 cord tips on the S3A and similar cords used with Nos. 109-, 110-, 309- and 310-type plugs. The No. 576B tool is used for placing the No. 135 cord tips on the S2A and similar cords used with the 47-type plugs. The No. 576C tool is used for placing No. 107 cord tips on MLG wiper cords of AECO step-by-step switches.

TOOL, 577B

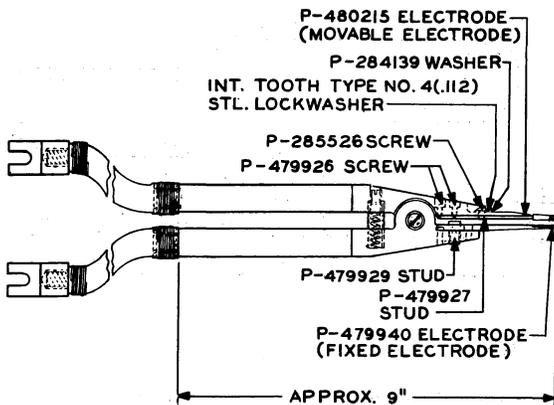


Welding pliers

This tool forms a part of the No. 1004B tool kit. Leads are approximately 36 inches long.

For use in replacing metal contacts on relays and other central office apparatus.

- TOOL, 578B
- TOOL, 578C
- TOOL, 578D
- TOOL, 578E
- TOOL, 578G

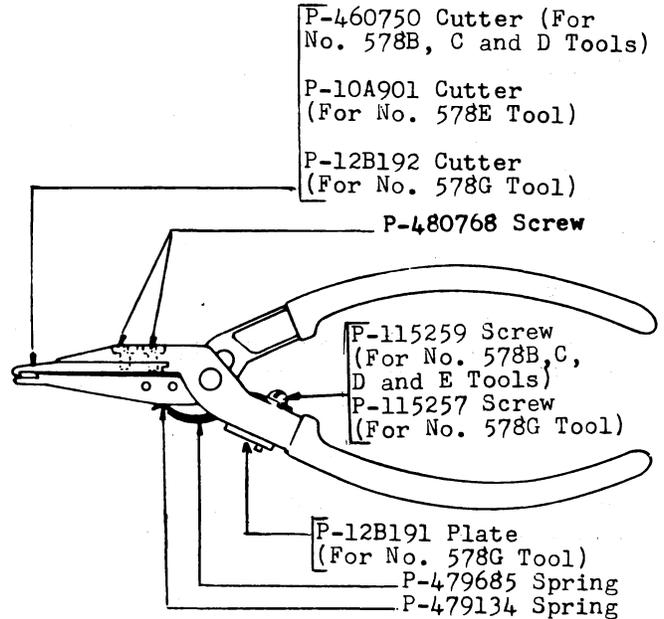

Contact Stripping Pliers

The No. 578B tool has white handles and is for general use when removing contacts from relays having flat-type contact springs. Replaces the No. 578A tool.

The No. 578C tool has red handles and is used for removing contacts from flat-type contact springs of relays such as multicontact and relays with offset contact springs. It has a shorter tip than the No. 578B tool and an adjustable cutting stroke.

The No. 578D tool has black handles and is used when removing contacts from control contact springs of KS-13835 readers.


The No. 578E tool has black handles and is used for removing contacts from the twin movable springs of wire spring relays.

The No. 578G tool has yellow handles and is used when removing contacts from flat springs of the 229- and 230-type relays.

The P-12B191 plate, furnished with the pliers, is required when removing certain contacts.

The No. 578B and 578C tool are component parts of the No. 1011B tool kit and the No. 578E tool is a component part of the No. 1013A tool kit.


TOOL, 579A

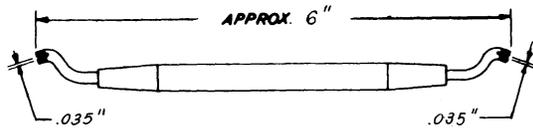

Adjuster

For adjusting vertical unit multiple strips of 300-, 304-, 324- and similar type switches.


TOOL, 581A

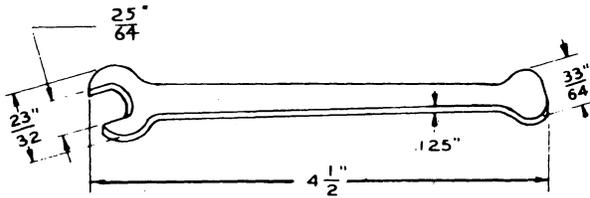

25/64" Flat Open End Wrench

For use on the 197- and 198-type switches.


TOOL, 582A

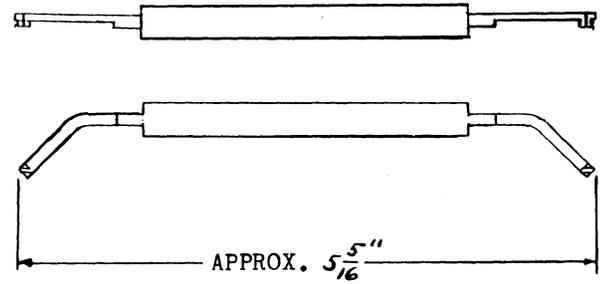

Spring Adjuster

For adjusting the .030" spring tangs next to the core on UA type relays.

TOOL, 583A

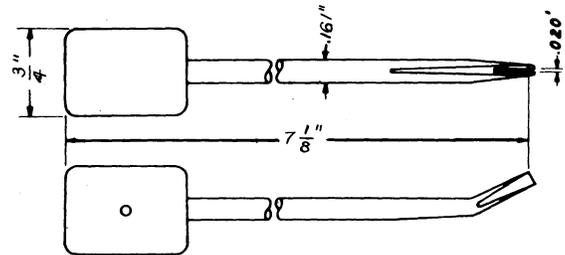

Spring Adjuster

Replaces the D-159890 Multiple Brush Adjuster.

For adjusting panel multiple brushes.