


CODED TOOLS

NOS. 610A TO 622A

TOOL, 610A

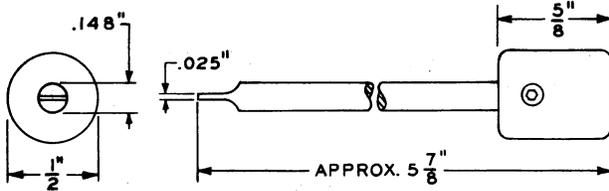


Potentiometer adjuster

A metal bit with a plastic handle which can be removed for attaching a cord through the top of the handle.

For use in adjusting channel gain on J68832C 4-wire voice frequency equipment.


TOOL, 611A

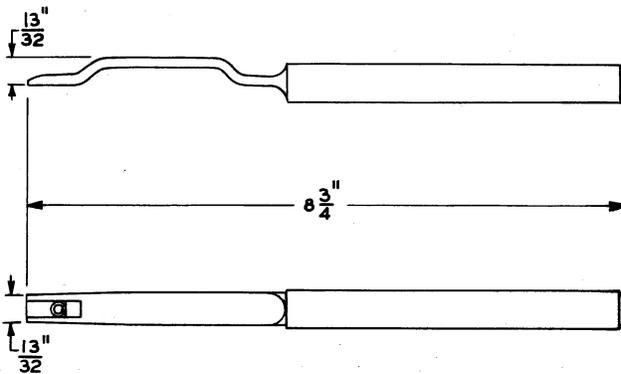

Relay hinge-bracket adjuster

For use on U-, UA- and Y-type relays having hinge pin-type armature suspension.


TOOL, 612A

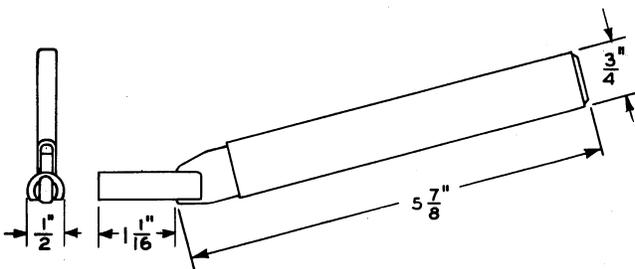

Relay core holder

For use on U-, UA- and Y-type relays having hinge pin-type armature suspension.


TOOL, 613A

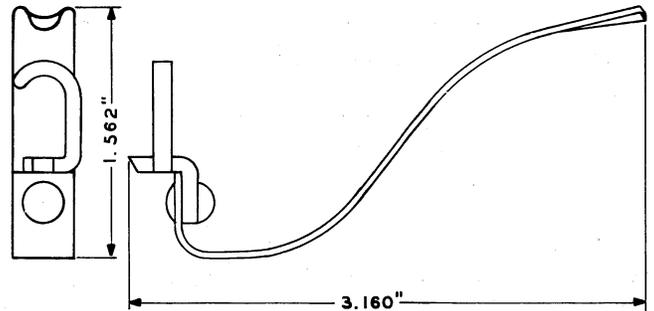

Brush clamp

For use in clamping a panel commutator brush to the elevator rod when the commutator brush clamping screw is loosened.


TOOL, 614A

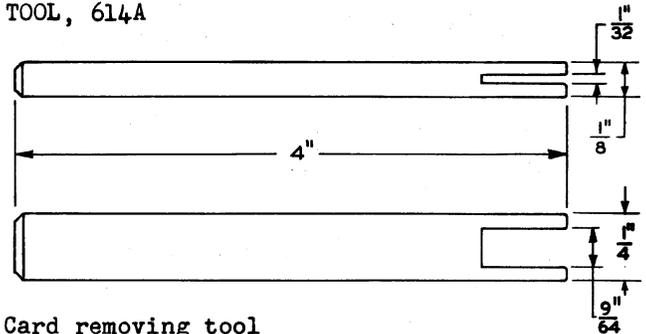

Card removing tool

For use on UB-type relays.

TOOL, 615A

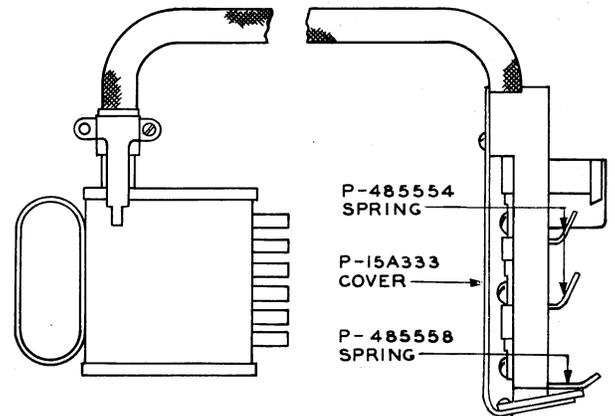

Test plug and cord


Consists of a KS-8585 List 41 plug and a connector assembly connected by a W6G cord.

For use in connecting 6 leads of a No. 12 service observing circuit to an operator's cord circuit.

SECTION A706.044

TOOL, 616A      Manufacture Discontinued


TOOL, 619A

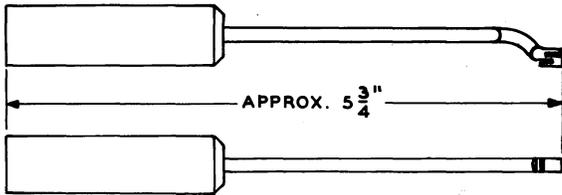

Adjuster

For use in adjusting panel commutator wiper holders.


TOOL, 620A

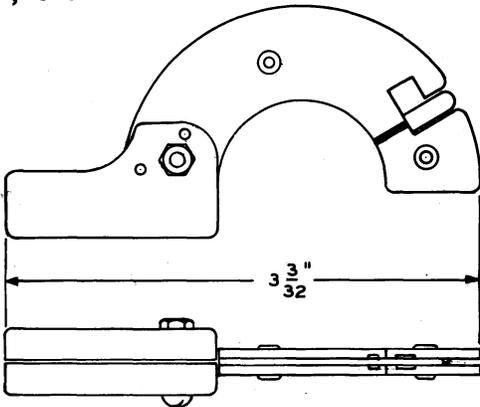

Bank contact connector

For use in making test connections to the bank contacts of step-by-step line finder switches. A W3AJ cord is required for connecting this tool.


TOOL, 621A

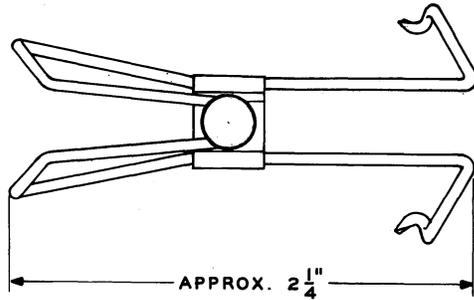

Spreader

For use in spreading panel commutator wiper pads when checking and adjusting commutator brush springs.

→ TOOL, 622A

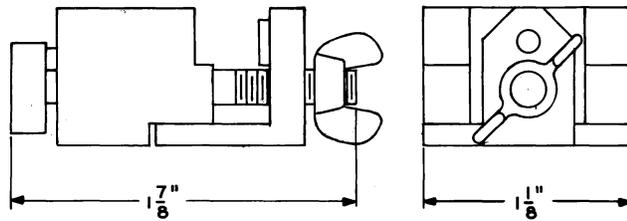

Clamp

For use during adjustments to support 200-, 206-, 209- and 211-type selectors non-rigidly mounted on mounting plates similar to the 189-type.