

NONCODED TOOLS


CORDS, COUNTERBORES, COVERS, COVER GUARDS, CUT-NIPPERS AND CUTTERS (STRAP)

CORDS, TEST, WESTON ELECTRICAL INSTRUMENT CO. NO. D-79650, D-79651 AND 168023. (In ordering, specify cord or cords desired.)

D-79650 is red, 6 ft. with pick
 D-79651 is black, 6 ft. with pick
 168023 is red, 10 ft. with clip

These cords are for use with portable volt-meters in taking battery readings. D-79650 and D-79651 form a pair used primarily for individual cell readings. D-79651 and 168023 form a pair used primarily for engine starting battery readings.

COUNTERBORE, MACHINE-SCREW; MORSE TWIST DRILL AND MACHINE CO. NO. 757 SIZE 0.187"-0.086".




For use in replacing springs and studs of Dzus fasteners.

COVER, KS-14475

A felt-lined, open-bottom canvas cover containing an accessory compartment with a slide fastener opening along the top; approximate inside dimensions, 32" long by 26-3/4" high by 15-3/4" wide.

For use on KS-13834 perforators while removed from service.


→ COVER GUARD, KS-16901 L1

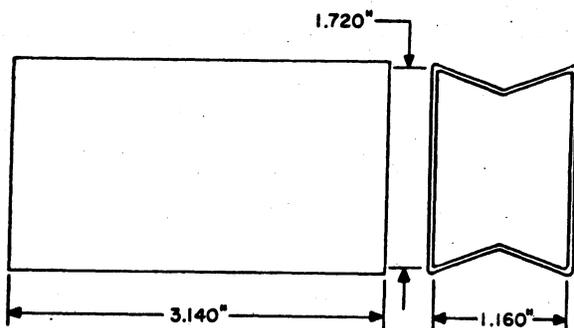

For use with the B-1185 relays having potential on frame as in disabler circuits associated with E2,E3 repeaters.

CUT-NIPPERS; L.S. STARRETT CO. TYPE 1C
 Replaced by KS-14439 Cut-nippers.

CUT-NIPPERS, KS-14439
 CUT-NIPPERS, KS-14442

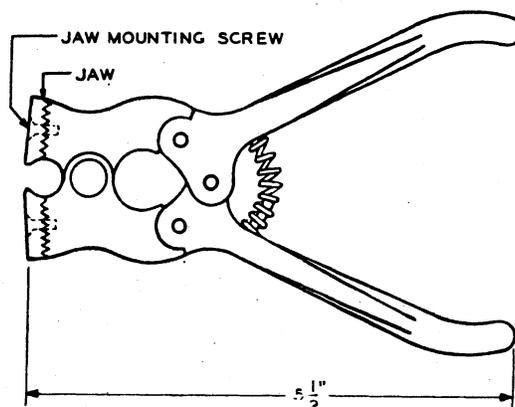


These tools are the same except for the cutting jaws. The jaws (pair) and the jaw mounting screws may be ordered separately when desired. In ordering, specify "() for (KS-) cut-nippers".

The KS-14439 cut-nippers are for use in replacing 1-type trip magnet armatures.

The KS-14442 cut-nippers are for use in cutting off worn contact springs of sequence switches.

CUTTERS, STRAP, R-2528

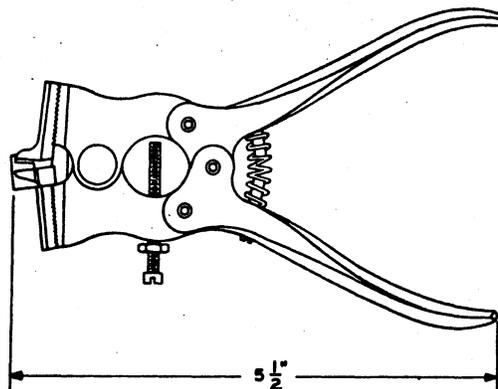

For cutting slots in straps to separate groups, when required, on 15-type banks.