

NONCODED TOOLS
 FLASHLIGHTS


FLASHLIGHT (SPEC. AT-7311-X)

Replaced by Flashlight (Type C)


Note: KS-14250, List 12, bottom cap may be obtained for use on both the prefocused and diffused models of the replaced flashlights. The KS-14250, List 13, plastic lens may be obtained for use with the prefocused flashlight but is not recommended for the diffused model.

FLASHLIGHTS

(In ordering, specify type B or C as desired.)

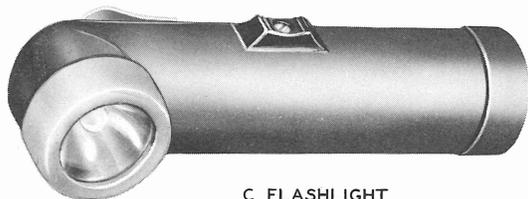

C FLASHLIGHT

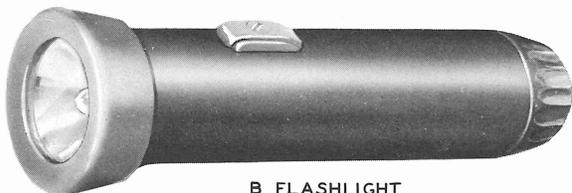

B FLASHLIGHT

Operates on two KS-6522 dry cells. Dry cells not furnished with flashlight.

Prefocused flashlights. These flashlights have a black case, clear lens, slide-type off-on switch, reflector, PR 6 lamp and spare lamp holder with a PR 6 type lamp in the end cap.


Type	Length	Diameter	Weight
B - straight	8"	2-1/2"	6 oz.
C - angle, equipped with a belt clip	8"	2-3/4"	6 oz.

C-type replaces the Flashlight (Spec. AT-7311-X).

For general use.

(Spec. AT-7724)

FLASHLIGHT, KS-14250, L1.

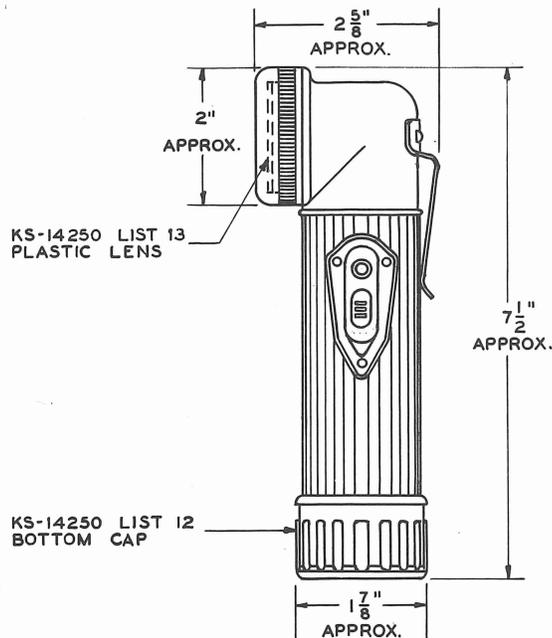

Operates on 2 KS-6522 dry cells. Dry cells not furnished with flashlight.

May be provided with a plastic or shatter-proof lens, a special bottom cap and a PR6 bulb. The terminals in the cap are intended for insertion in 360-type tools which cause the switching arrangement to open the circuit, so that with the flashlight switch operated, lighting the bulb depends upon a closure between the leads attached to the 360-type tools.

The following parts may obtained separately:

- KS-14250, List 11 flashlight body
- KS-14250, List 12 bottom cap
- KS-14250, List 13 lens
- PR6 bulb

The KS-14250, List 12 bottom cap replaces KS-7742 bottom cap used with flashlights previously specified.

For general use.