



NONCODED TOOLS

GUNS (GREASE), HAMMERS, AND HANDLES


GUN, GREASE, LINCOLN ENGINEERING CO. NO. 5958

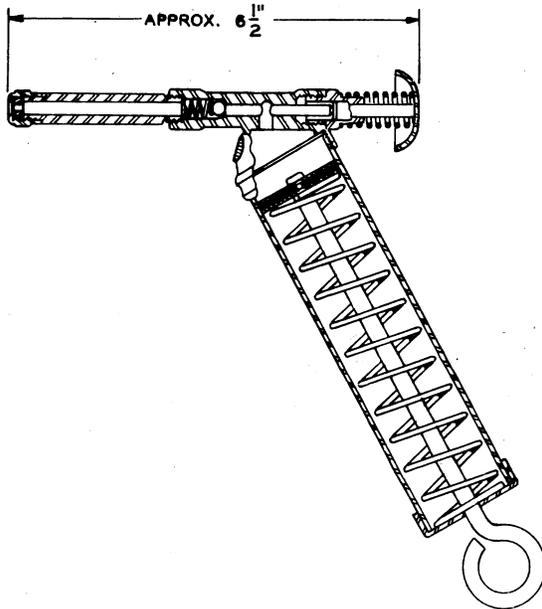


A push-type grease gun having a capacity of 5 oz. and a maximum pressure of 5000 lbs. The nozzle furnished on the gun will fit either pin-type or "Zerk"-type fittings but does not clamp on to the fitting.

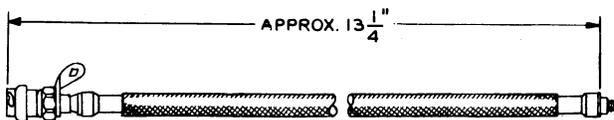

The No. 3040 Hand Gun Hose, ordered separately, will adapt the gun to clamp on to pin-type fittings.

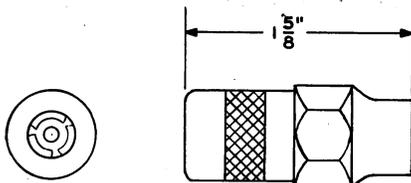

The No. 5845 Hydraulic Coupler, ordered separately, will adapt the gun to clamp on to "Zerk"-type fittings.




Z-737 Alemite Nozzle, ordered separately, will adapt the gun for use with Alemite Flush-type Lubrication Fitting 1853.

The No. 5958 grease gun and the No. 3040 hand gun hose replace the No. 5950 grease gun and No. 3030 hand gun hose formerly manufactured by the Lincoln Engineering Co.

For general use.

GUN, GREASE, KS-7461

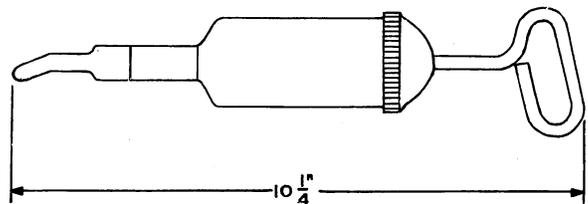

For use on 12-, 14-, and 15-type teletype-writers.


GUN, GREASE, KS-8319
 Replaced by KS-7461 grease gun.

GUN, GREASE AND OIL, COMBINATION, KS-5000

Consists of a cylindrical tube containing a plunger and spindle. May be used as a grease gun by screw action of the handle or as an oil gun by pump action of the handle; the changeover is made by turning a lock nut on the spindle. Capacity approximately 1/2 pt.

For general use.


HAMMER, BALL PEEN, 1-LB.

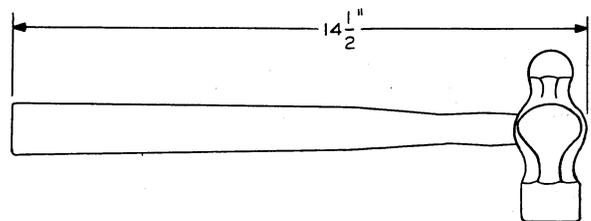

For general use.
 (Spec. AT-7329)

SECTION A707.071


HAMMER, CLAW, 1-LB.

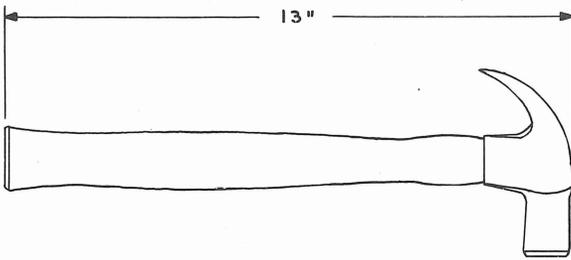

For general use.

(Spec. AT-7329)


HAMMER RIVETING, 4-OZ.

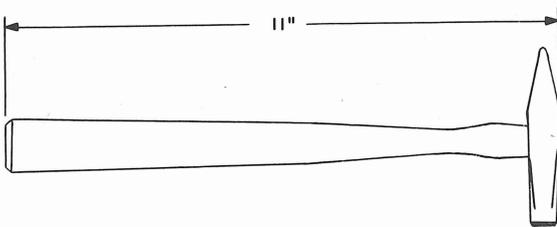

For general use.

(Spec. AT-7329)

HANDLE, CARRYING, KS-5299

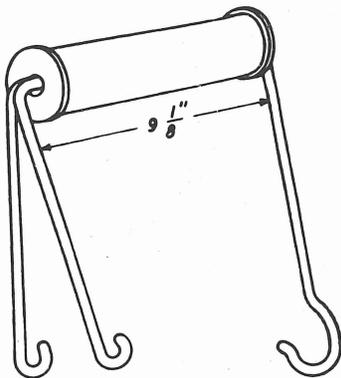

For use in carrying duplex motors.

HANDLE, FILE, 5", HAMMACHER SCHLEMMER & CO. NO. 4 (OR EQUIVALENT)

Replaced by the No. 4 Nicholson File Co. file handle (or equivalent).

HANDLE, FILE, NICHOLSON FILE CO. NO. 4 (OR EQUIVALENT)


Replaces the 5" Hammacher Schlemmer & Co. file handle.

For use on files listed in Section A707.054.

HANDLE, GRAVER, WILLIAM DIXON INC. NO. 15

For use on the William Dixon Inc. No. 40 flat graver, which is used in replacing contacts on KS-13835 readers.

→ HANDLE, KS-16298

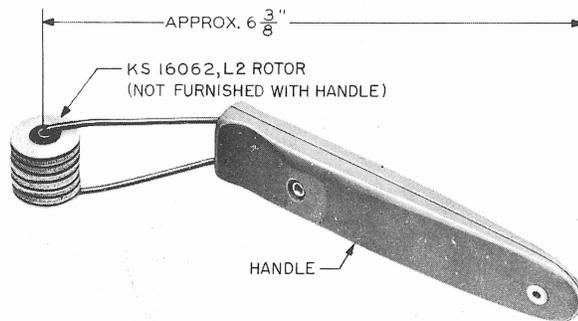


Handle having spring yoke for holding bank cleaning rotor.

The KS-16062 L2 Rotor used in this tool must be ordered separately.

For use in cleaning step-by-step bank contacts and separators.

HANDLE, KS-16884, L1

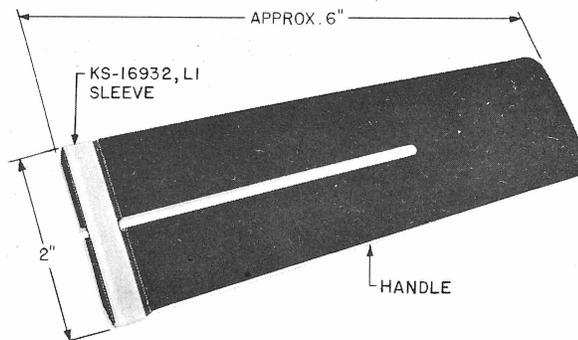

KS-16932 L1 Sleeve used with this tool must be ordered separately.

For use in cleaning and treating subscriber link district finder bank terminals.