

NONCODED TOOLS

LACERS, LAMPS, LINES (FISH), LUBRICATORS,
MALLETS, MIRRORS, NEEDLES, NOZZLES, AND NUTS

LACER, BELT, CLIPPER BELT LACER CO.,
"CLIPPER" NO. 1 (OR EQUIVALENT)

For belts not over 3/16" thick and 2" wide.
Uses "Clipper" No. 1 belt hooks only.

For use on pneumatic ticket distributing
systems.

LAMP, PORTABLE, KS-7191
LAMP, PORTABLE, KS-7192

Use GE No. 72 (24-V) or KS-7203 (48-V)
lamps in these lamps.

Caution: Do not use KS-16196 or KS-16197
lamps in these lamps because the lamp and
reflector would become dangerously hot.

Replaced by KS-14762 and KS-14761 portable
lamps, respectively.

Clamps on racks, frames or switchboards and
operated from central office battery. De-
signed to use high candle power, sealed
beam lamps KS-16196 (24-V) or KS-16197
(48-V) which must be ordered separately.


Caution: Do not use KS-16196 or KS-16197
lamps in the KS-7191 and KS-7192 portable
lamps because the lamp and reflector would
become dangerously hot.

Replace the KS-7192 and KS-7191 portable
lamps, respectively.

The KS-14761 portable lamp is supplied with
a 14-ft. M2EJ cord with a No. 310 plug and
is for use in Step-by-Step Offices.

The KS-14762 portable lamp is supplied with
an 8-ft. M2EK cord with connecting clips
and is for general use.

→ LAMP, PORTABLE, KS-14761
→ LAMP, PORTABLE, KS-14762

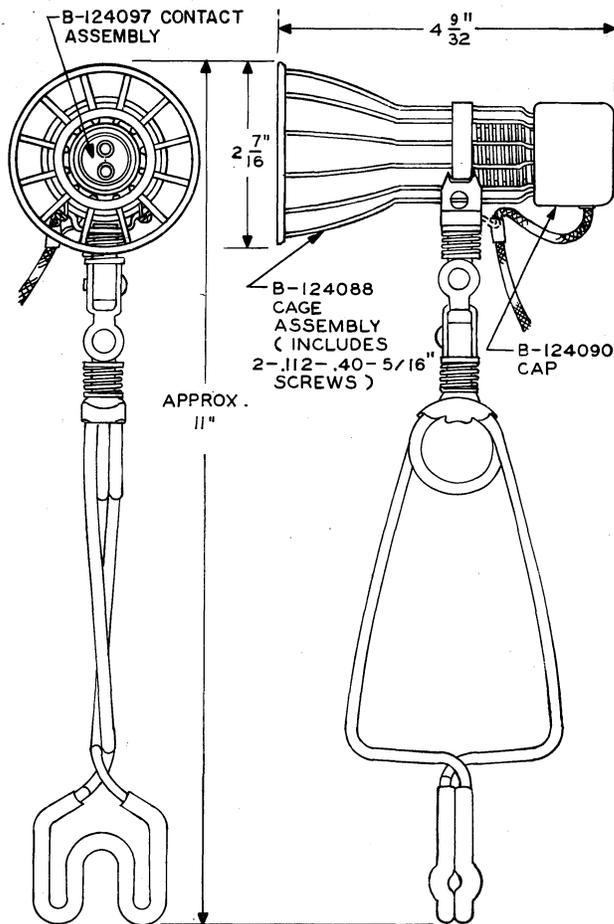

→ LAMP, TEST, POWER, R-2559

An enclosed neon test lamp which glows when
the terminals are placed across live
electrical circuits having voltages of 80
to 600 AC or DC. Insulated lead is 24"
long. The entire unit is cement-sealed and
moisture proof.

For use on Compressor-dehydrators,

LINE, FISH, R-1313

A braided flax line about .032" in diameter
having a tensile strength of approximately
15 lbs. Furnished in 50 yard lengths on
wooden spools.

For use in lining up equipment in panel of-
fices and in cleaning pneumatic tube equip-
ment in toll offices.

LUBRICATORS

See Guns, Grease: Cans, Oil; and Oilers.

MALLET, RUBBER, R-2192

A 30-oz. rubber mallet, head approximately
3-1/8" x 4-3/4". Overall length 16".


For use in driving multiple wedges when
clearing trouble in switchboard cable.

MIRROR, DENTAL, R-1623

Replaced by the No. 376A tool.

SECTION A707.096


MIRROR, ADJUSTABLE, R-2965

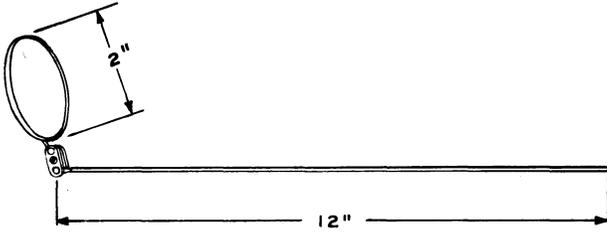

A plain mirror

For use in adjusting the KS-13834 perforators in the No. 5 Crossbar System.


MIRROR, DENTAL, P-220366

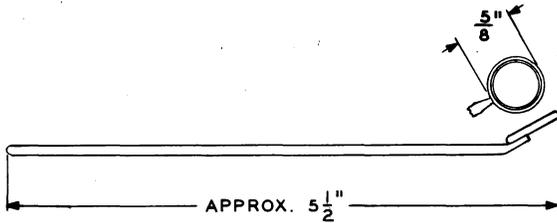

A magnifying mirror with insulated metal parts.


For general use.

NEEDLE, SACK, R-59237

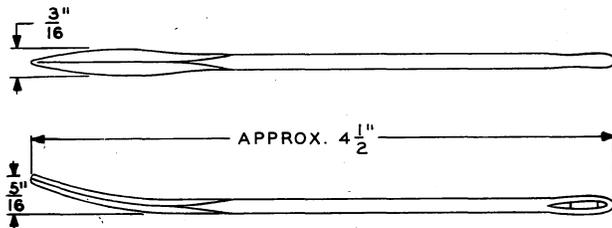


Steel needle for use in sewing cable forms. (P.B.X. installation only.)

NOZZLE, KS-14349

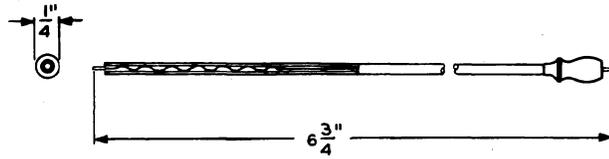

For use with the No. 486A tool when oiling KS-13834 perforators.

NUT, GUIDE AND CLAMP, D-97086

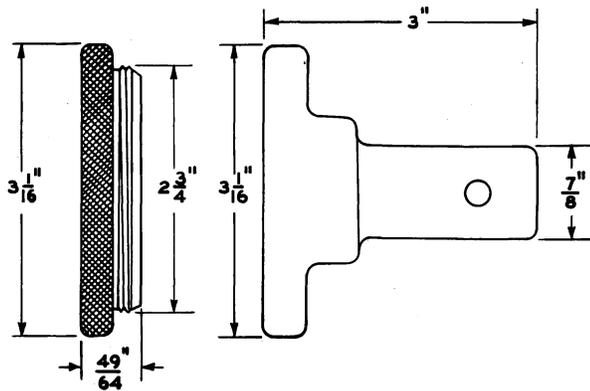

For use with the D-97085 reamer and handle when reaming housing assembly bearings of friction roll drives.