


NONCODED TOOLS

STONES, STRETCHERS, STRIPPERS (CABLE),
 AND STRIPPERS (WIRE)

STONE, COMMUTATOR, IDEAL INDUSTRIES, INC.
 (In ordering, specify catalogue number followed by letter F if finishing grade is desired or letter P for polishing grade. Sizes are given as length, width and thickness. Other sizes, grades and handle arrangements are shown in the manufacturer's catalogue.)



Dbl. Saw-Type Handle Shown

Ideal Cat. No.	Type Handle	Size Inches
80-075	None (Pencil)	5/8 X 3/8 X 6
80-184	Straight	2 X 1 X 2
80-193	"	3 X 1 X 2
80-324	Railway	3 X 2 X 2
80-357	Saw	4 X 1-1/2 X 3
80-371	"	5 X 2 X 2
80-385	"	5 X 3 X 3
80-389	"	6 X 2 X 3
80-407	Dbl. Saw	4 X 8 X 3
80-419	" "	5 X 7 X 3

For use on machine commutators

STONE, NORTON CO. HB 13 (OR EQUIVALENT)

Hard Arkansas Stone, 3" x 1", 1/4" to 3/8" thick.


For use in removing buildups and pits from tungsten contacts of relays.

STONE, OIL, R-1441.

A 1/2" x 2" x 6" oil stone mounted in a wooden box.

For general use.

STONE, OIL, BEHR-MANNING CO., FT 10

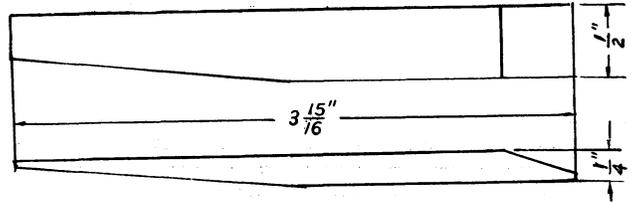

For use on clutch pawls.


STONE, CARBORUNDUM, TP87698

A 1/2" x 1/2" x 4" Carborundum stone.

Replaces Carborundum Stick 3/8" round, 4" long.

For use on distributors.


STRETCHER, KS-16334

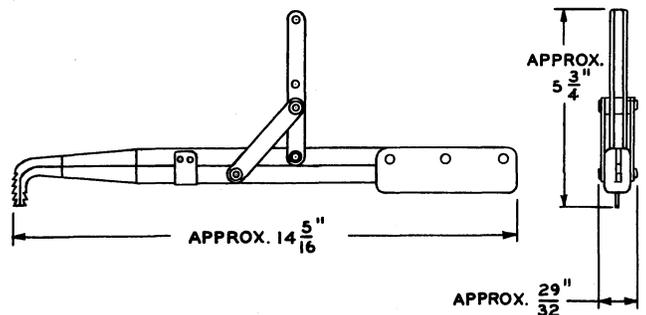

For use in installing shock absorbers on U-type relays.


SECTION A707.153

STRIPPER, CABLE, R-62267

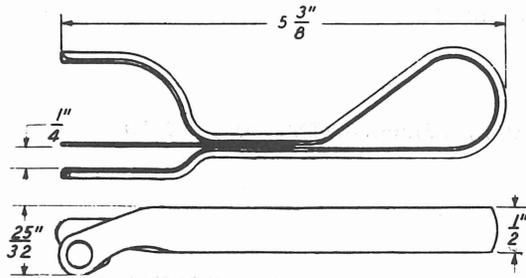

For use in stripping sheath from braided cable. (P.B.X. installation only)


STRIPPER, CABLE, WIRING, INSIDE

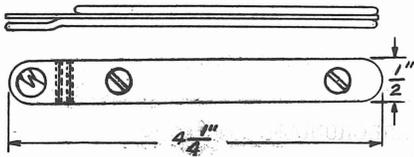

For use in removing outer braid from inside wiring cable. (P.B.X. installation only)


(Spec. AT-6691)

STRIPPER, CABLE, COVERED, LEAD, R-2115

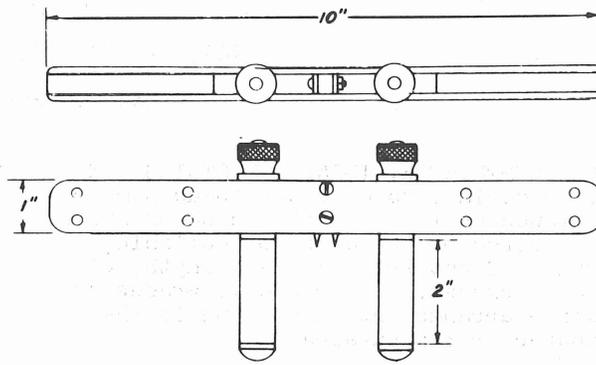

For use in stripping lead covered cable (P.B.X. installation only).

STRIPPER, WIRE, PLIER-TYPE, R-3088

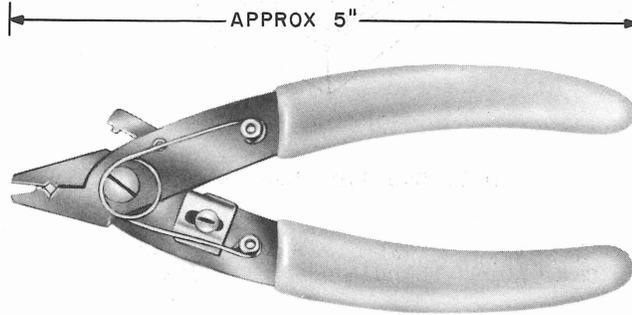

For use in removing insulation used on BU wire.