


NONCODED GAUGES

THERMOMETERS AND TIMERS

THERMOMETER, R-1032, DETAIL 1



The thermometer is a glass stem, spirit-filled thermometer with graduations engraved in stem approx. 12 in. long and graduated in 1-degree divisions from -5° to 150C.

The R-1032, Det. 1 Thermometer will be furnished with a cardboard container.

Metal cases, Tagliabue Manufacturing Company No. 51700 (for R-1032, Det. 1 Thermometer), when needed, may be ordered as separate items so as not to delay deliveries of thermometers from Western Electric stock.

Replaces the R-1032 Thermometer, previously furnished as follows:

Mercury-filled: 0° to 200C, 6" long.
Spirit-filled: -2° to 110C, 12" long.

Also replaces the No.43732 Kimble Thermometer
For general use.

THERMOMETER, KIMBLE COMPANY NO. 43732

Replaced by the R-1032, Detail 1, Thermometer.

THERMOMETER, EIMER & AMEND COMPANY NO. 32149
(OR EQUIVALENT)

Replaced by Thermometer, Fisher Scientific Company No. 14-985.

THERMOMETER, FISHER SCIENTIFIC COMPANY,
NO. 14-985, 1-DEGREE GRADUATIONS, -10° to +400C.

A glass stem mercury-filled thermometer approx. 15-3/4" long.

Replaces Thermometer, Eimer & Amend Company No. 32149 (or equivalent).

For general use.

THERMOMETER, EIMER & AMEND COMPANY NO.
32155 (OR EQUIVALENT)

Replaced by Thermometer, Fisher Scientific Company, No. 14-990.

THERMOMETER, FISHER SCIENTIFIC COMPANY
NO. 14-990, 2-DEGREE GRADUATIONS, 0° to 230F.

A glass stem mercury-filled thermometer approx. 12" long.

Replaces Thermometer, Eimer & Amend Company No. 32155 (or equivalent)

For general use.

THERMOMETER LINE

Graduated in 2-degree divisions from -20° to +120F, and numbered every 10 degrees. Has a wood back approx. 1-1/2" x 8", faced on one side with a metal scale on which is mounted the thermometer tube containing a red fluid.

For general use in measuring room and outside temperatures.


(Spec. AT-6639)

THERMOMETER, KS-5499
(In ordering, specify KS-5499 and list number of thermometer desired.)

KS-5499, List 1352, red spirit-filled thermometer, 6-5/8" long, graduated in 1-degree divisions from 20° to 120F and numbered every 10 degrees from 20° to 120F. For use in testing cells 100 ampere-hours or less.

KS-5499, List 1353, red spirit-filled thermometer, 10-1/8" long, graduated in 1-degree divisions from -20° to 130F and numbered every 10 degrees from -20° to 130F. For use in testing cells over 100 ampere-hours.

TIMER, STANDARD ELECTRIC TIME CO. S-1
(In ordering, specify 115-V motor voltage, 60 cycles, and 24-V or 48-V dc clutch voltage. Also, if electric reset is desired, specify S-1-ER.)

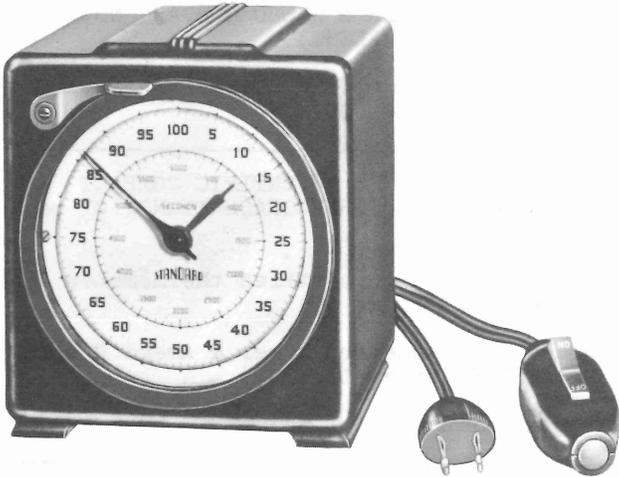

Unless otherwise specified, all portable models are furnished with a manual reset feature, a 5' cord and plug for connecting to the ac power supply and also a 3' cord with start and stop pendant switch. For portable models with the electric reset feature, the switch is provided with an additional pushbutton in the end for remote resetting of the timer.

For use in measuring time intervals.