


ELECTRON TUBE DATA SHEET  
WESTERN ELECTRIC 323B ELECTRON TUBE

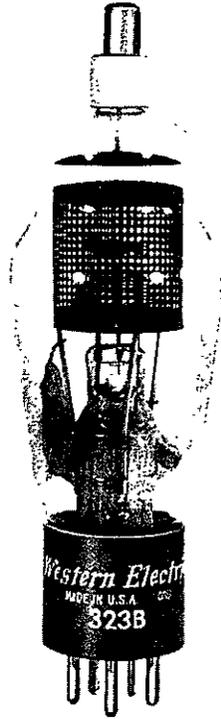

ONLY

DESCRIPTION

The 323B is a three-electrode mercury-vapor and gas-filled thyatron with a negative control characteristic. This tube is designed for use in regulated or controlled rectifiers.

MAXIMUM RATINGS

Peak Anode Voltage . . . . .	1250 volts
Average Cathode Current . . . . .	1.5 amperes

FILE: THYRATRON SECTION

MAXIMUM RATINGS, Absolute Values

Peak Anode Voltage	
Inverse . . . . .	1250 volts
Forward . . . . .	1250 volts
Cathode Current	
Peak . . . . .	6 amperes
Average . . . . .	1.5 amperes
Surge (maximum duration 0.1 second) . . . .	120 amperes
Averaging Time . . . . .	5 seconds
Negative Grid Voltage	
Before Conduction . . . . .	500 volts
During Conduction . . . . .	10 volts
Positive Grid Current, Average (averaging time - one cycle) . . . . .	.010 amperes
Condensed Mercury Temperature Limits <sup>1</sup> . . . .	-55 to + 80 centigrade

ELECTRICAL DATA


	<u>Min.</u>	<u>Bogey</u>	<u>Max.</u>	
Filament Voltage . . . . .	2.37	2.5	2.62	volts
Filament Current at 2.5 Volts . . . . .	---	7.0	7.75	amperes
Filament Heating Time Required . . . . .	15	---	---	seconds
Anode to Grid Capacitance . . . . .	---	1.8	---	uuf
Grid to Filament Capacitance . . . . .	---	5.0	---	uuf
Deionization Time, Approximate <sup>2</sup>				
$E_{bb}=1250$ volts; $THg=80C$ ; $I_b=6$ amperes;				
$E_{cc}=-18$ volts; $R_g=20,000$ ohms . . . . .	---	1200	---	microseconds
Ionization Time, Approximate <sup>3</sup> . . . . .				
$E_{bb}=100$ volts; $THg=40C$ ; grid overvoltage=5 volts . . . . .	---	35	---	microseconds
$E_{bb}=100$ volts; $THg=80C$ ; grid overvoltage=25 volts . . . . .	---	0.5	---	microsecond
Anode Voltage Drop . . . . .	---	15	---	volts
Critical Grid Current at 220 Anode Volts . . . . .	---	---	5	microamperes
Change in Critical Grid Voltage at 500 Anode Volts from +20 to +80 $THg$ . . . . .	---	0.2	---	volt

MECHANICAL DATA



Type of Cooling . . . . .	Convection
Equilibrium Condensed Mercury Temperature Rise above Ambient, Approximate	
At Full Load . . . . .	30 centigrade
At No Load . . . . .	20 centigrade
Mounting Position . . . . .	Vertical-base down
Net Weight, Approximate . . . . .	3 ounces
Dimensions and pin connections shown in outline drawing on Page 4	


1. For starting conditions only. Equilibrium operation is limited to +20°C minimum condensed mercury temperature.
2. Deionization time decreases with an increase in negative grid voltage or with a decrease in (a) condensed mercury temperature (THg), (b) grid resistance or (c) anode current immediately preceding the end of conduction.
3. Ionization time decreases with an increase in (a) anode voltage, (b) condensed mercury temperature (THg) or (c) grid overvoltage. Grid overvoltage is defined as the magnitude by which the applied voltage exceeds, in a positive direction, the critical grid voltage value. Critical grid voltage is the instantaneous value of grid voltage at the time when anode current starts to flow.

TYPICAL CONTROL CHARACTERISTICS.  
 SHADED AREA SHOWS RANGE OF CHARACTERISTICS, CONDENSED MERCURY TEMPERATURE  $-55^{\circ}\text{C}$ . TO  $+80^{\circ}\text{C}$ .

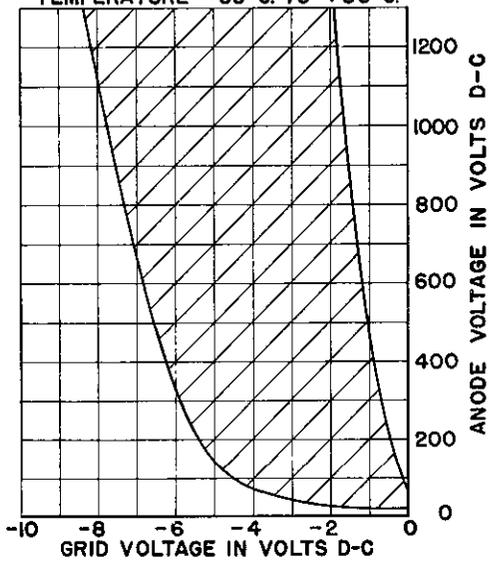

TYPICAL GRID CURRENT CHARACTERISTICS DURING ANODE CONDUCTION

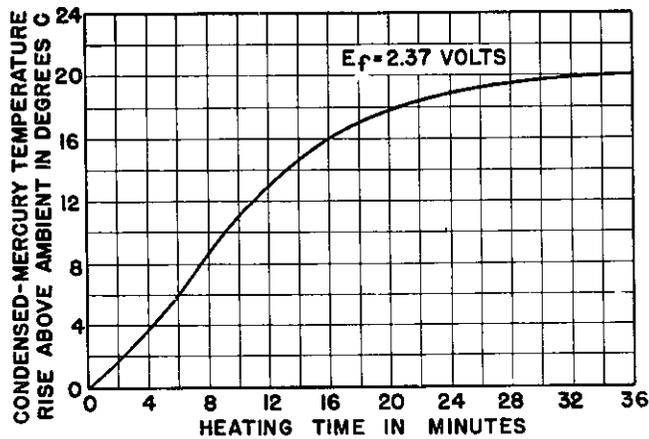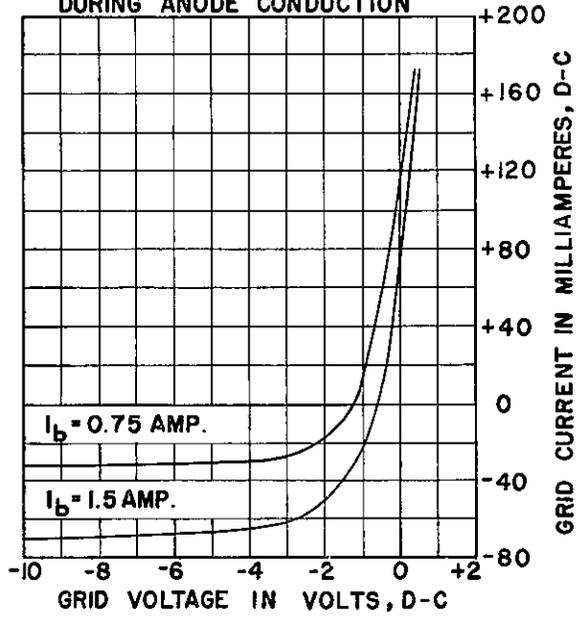

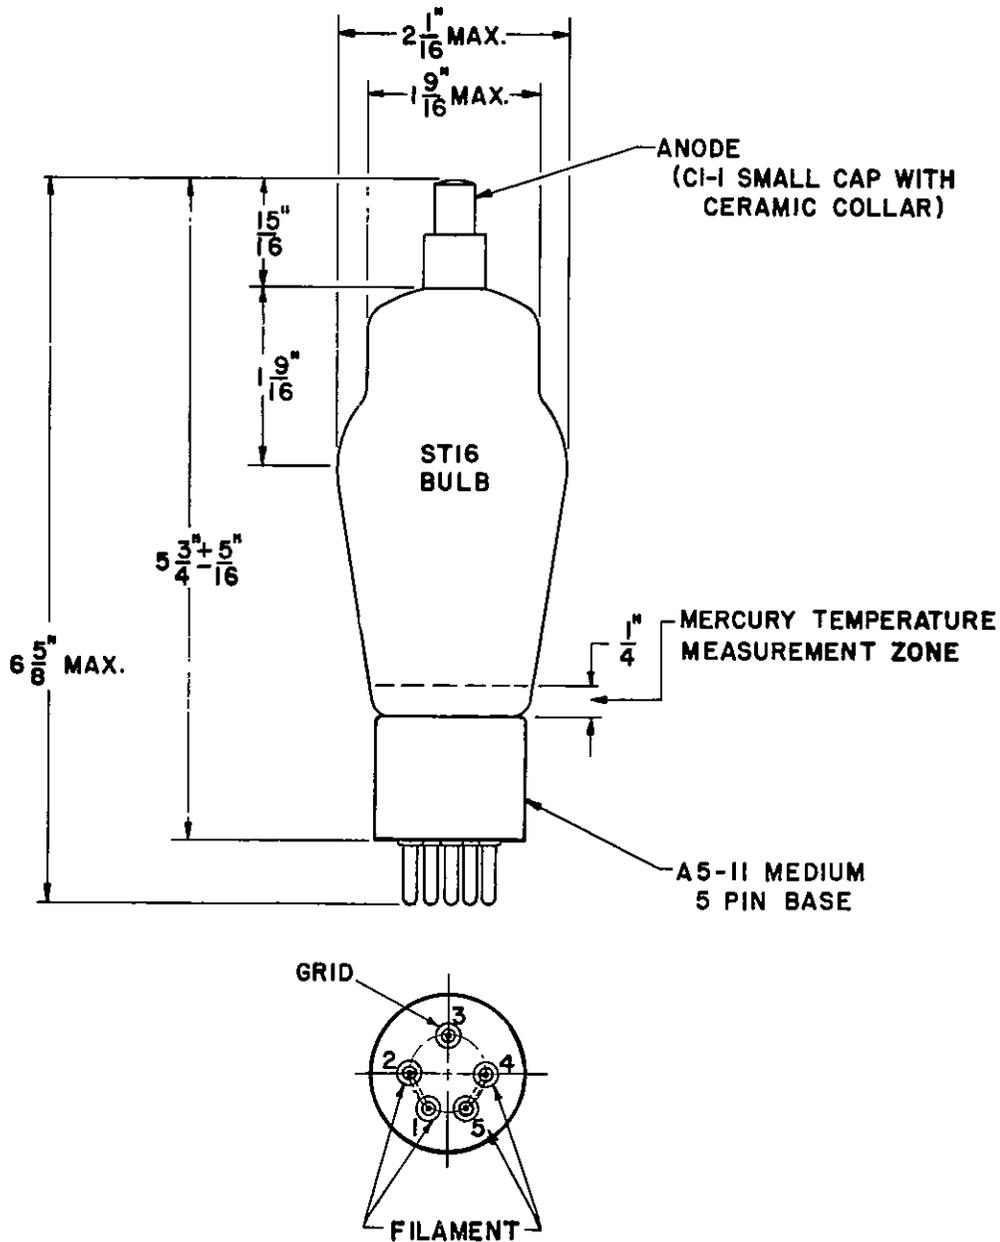

A development of Bell Telephone Laboratories, the research laboratories of the American Telephone and Telegraph Company and the Western Electric Company.