


7 1/8

NOTES:

1. AFTER PLATING HEAT TREAT BY HEATING IN OVEN OR OIL BATH AT 300°F TO 500°F FOR ONE HOUR.
2. NO COPPER FLASH BEFORE CHROME PLATING. CHROME PLATE TO BE .0005 MIN., .001 MAX. THICK BRIGHT CHROME PLATE.

10 1/4

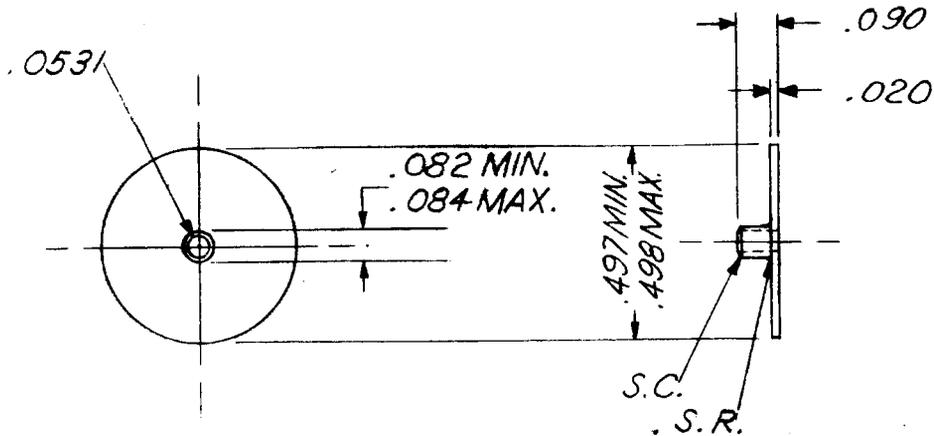

DRILL ROD

HARDEN ROCK C 57-60
 BRIGHT CROME PLATE
 DO NOT BUFF
 SEE NOTES

ENGR	V.L. BEHNKE	VLB	CLB
DRAWN	F. KORDELSKI	AK	AGKM
ISSUE	1	2-2-56	

VALVE DISC

WESTERN ELECTRIC COMPANY, INC.
 ENGINEER OF MANUFACTURE
 BELL TELEPHONE LABORATORIES, INC.

B- 908520
 A-

SHEET

NO. OF SHEETS PER SET SEE SHEET 1