


BSRS452.024

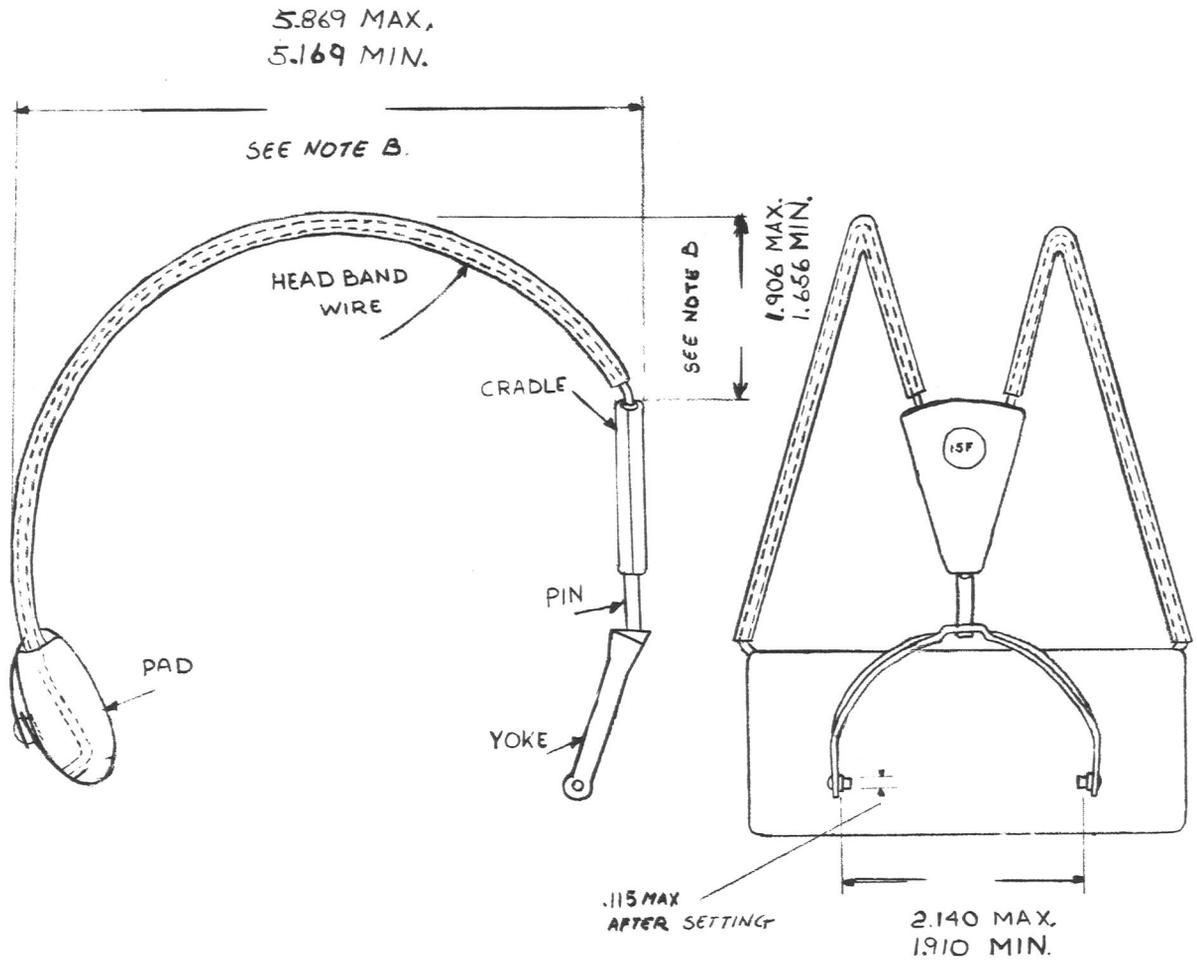

NOTES :

- A. HEAD BAND WIRE SHALL BE SMOOTH AND OF ROUND CROSS-SECTION.
- B. THIS REQUIREMENT APPLIES WHEN ENDS OF HEADBAND ARE PUSHED TO MAXIMUM DEPTH IN CRADLE.

ENGR	HOL	DWG	15F HEADBAND
DRAWN	HOL		
ISSUE	1	4-12-61	J.S.
DEMENSIONS CHANGED TO AGREE WITH NEW PRODUCT FRL ISSUE 2 3-15-67			
BSRS	452.024	USED ON	
WESTERN ELECTRIC COMPANY, INC. ENGINEER OF MANUFACTURE			SHEET
BELL TELEPHONE LABORATORIES INCORPORATED			
B-983622			NO. OF SHEETS PER SET / SEE SHEET 1
A-			