



A-580160

BSRS350.003

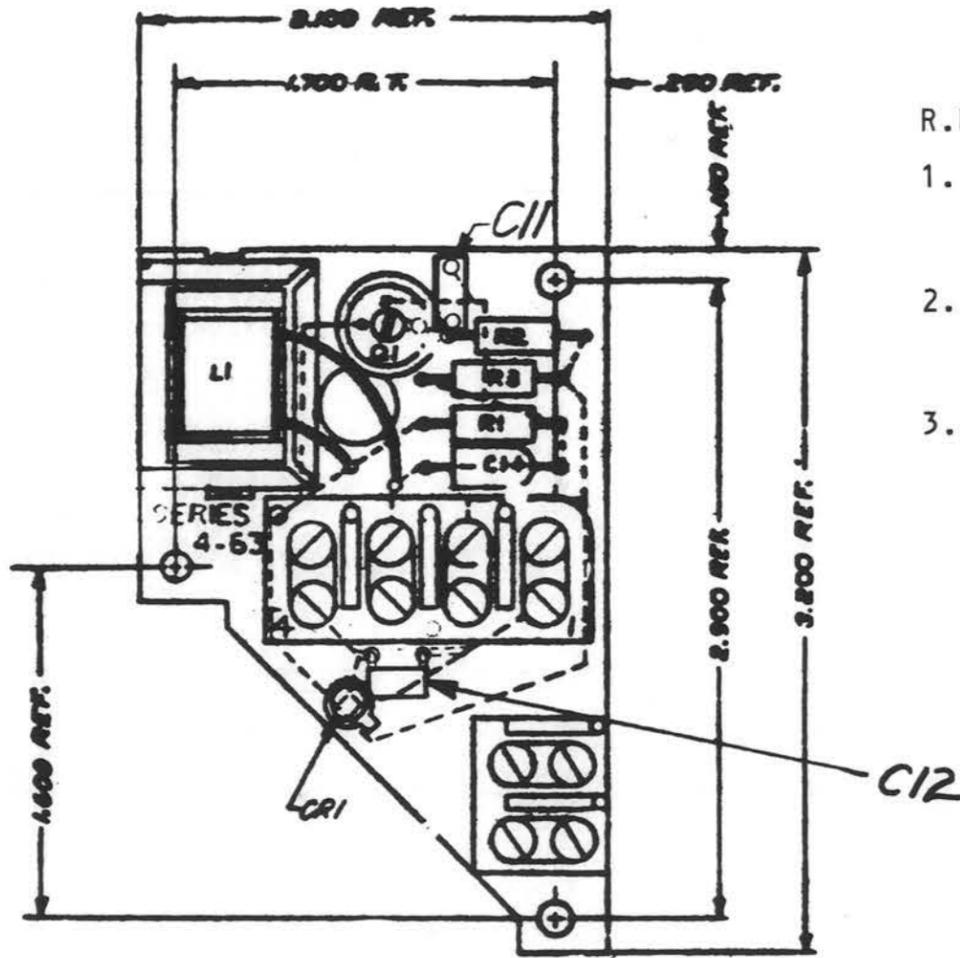

R.F. SUPPRESSION NOTES:

1. LOCATE (2) 0.01 uf (KS 19708-L4) CAPACITORS ON THE 241A AMPLIFIER APPROXIMATELY AS SHOWN. (C11 AND C12)
2. PLACE A, "MODIFIED FOR R.F. SUPPRESSION," LABEL NEAR THE CODE STAMP.
3. DRILL 0.025 HOLES NEAR PATHS AS SHOWN AND SOLDER CAPACITOR LEADS TO PATHS. (4 PLACES)

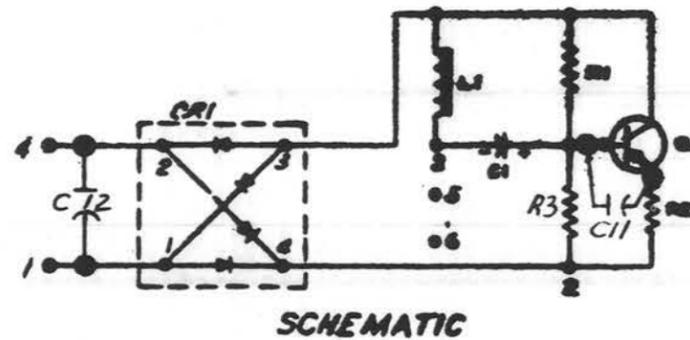

B-991729

ENGR. G.B. JACKSON

DRAWN R. KOT

10-12-67. 1

155-2 5-27-68  
Delete Material Not Refering To R.F. Suppression

W.P.K. 1/15

B-991729

241A AMPLIFIER MODIFICATION

N.T.S.

REVISIONS

3S B-991729

Handwritten initials