

INSTALLATION

1-S AUTOMATIC CALL DISTRIBUTING SYSTEM

1. GENERAL

- 1.001** This addendum supplements Section B502.059, Issue 1.
- 1.002** This addendum is issued to correct Fig. 12 covering a typical arrangement for termination of operator's telephone equipment.
- 1.003** This addendum should be filed with Section B502.059, Issue 1. The attached page should be inserted in the section and the correspondingly numbered page should be removed.


4. REQUIREMENTS AND METHODS

The following change applies to Part 4 of the section:

- (a) Fig. 12 — revised

Attached:

Page 20 dated April 1960, revised.

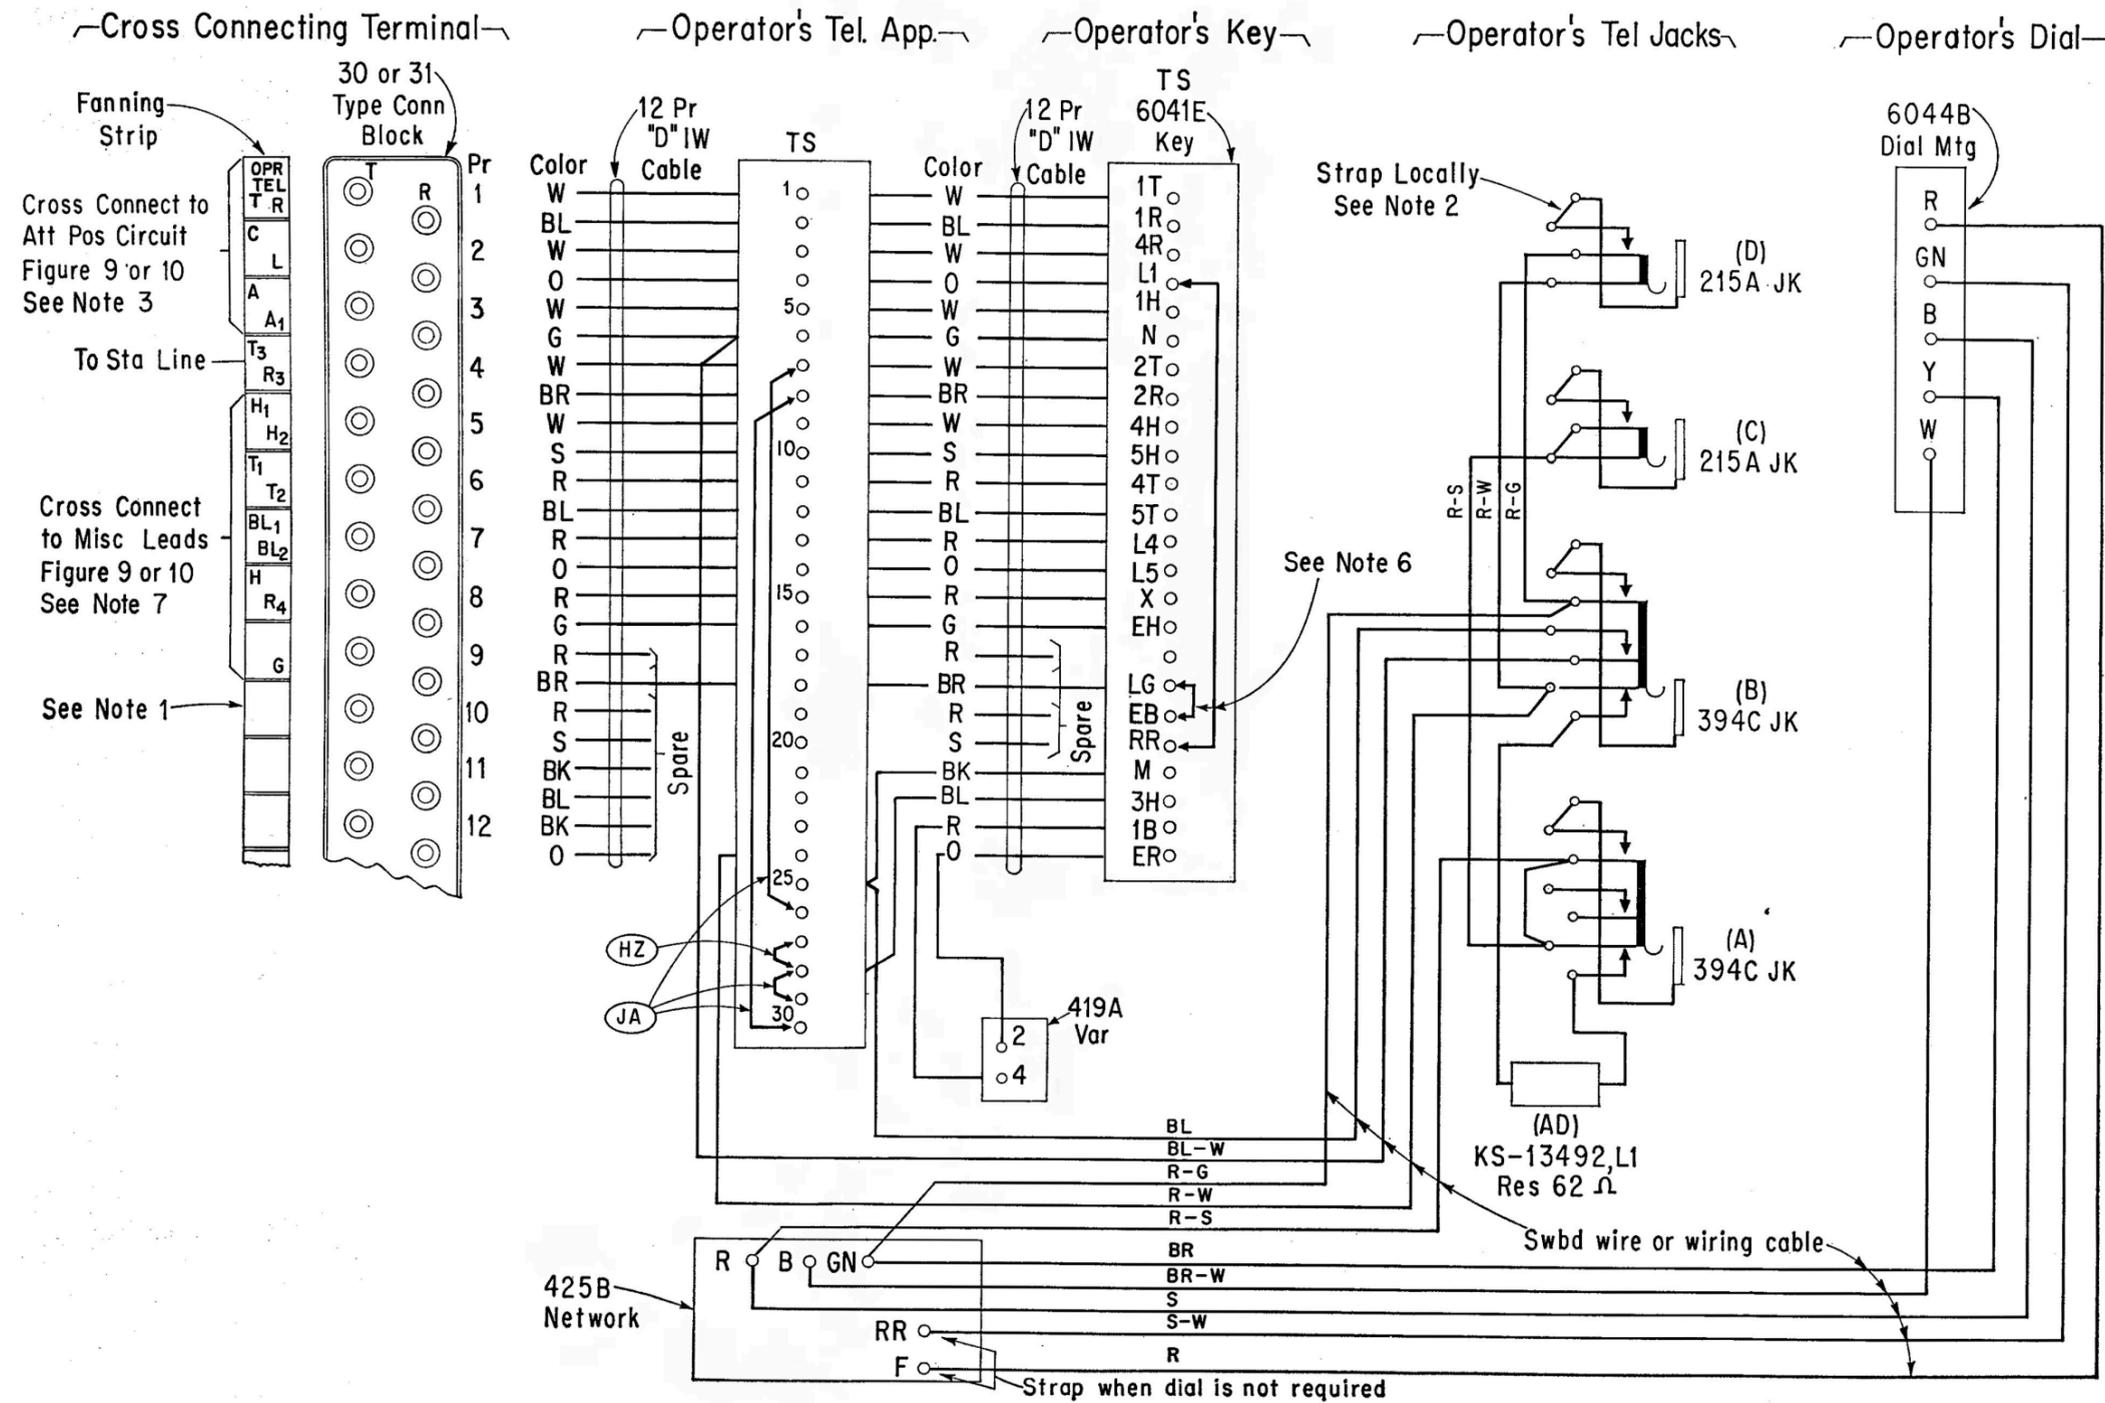

Note:

1. When binding post chambers or connecting blocks are used which have the ring binding post positioned above and to the right of the tip binding post, transpose the designations for single leads.
2. Strap the operator telephone jacks A, B and monitor jacks C and D as required.
3. When night answering transfer circuit is provided, cross connect 1st operator's position key leads to Fig. 13.
4. Provide HZ strap when hold for out line is required.
5. Provide JA strap when conference circuit is required.
6. Straps to be provided by installer
7. When multiple appearance trunk transfer is provided on transfer key No. 2 cross-connect T2 lead to MISC T lead Fig. 9 or 10.

Fig. 12 - Typical Arrangement for Termination of Operator's Telephone Equipment