



LA-

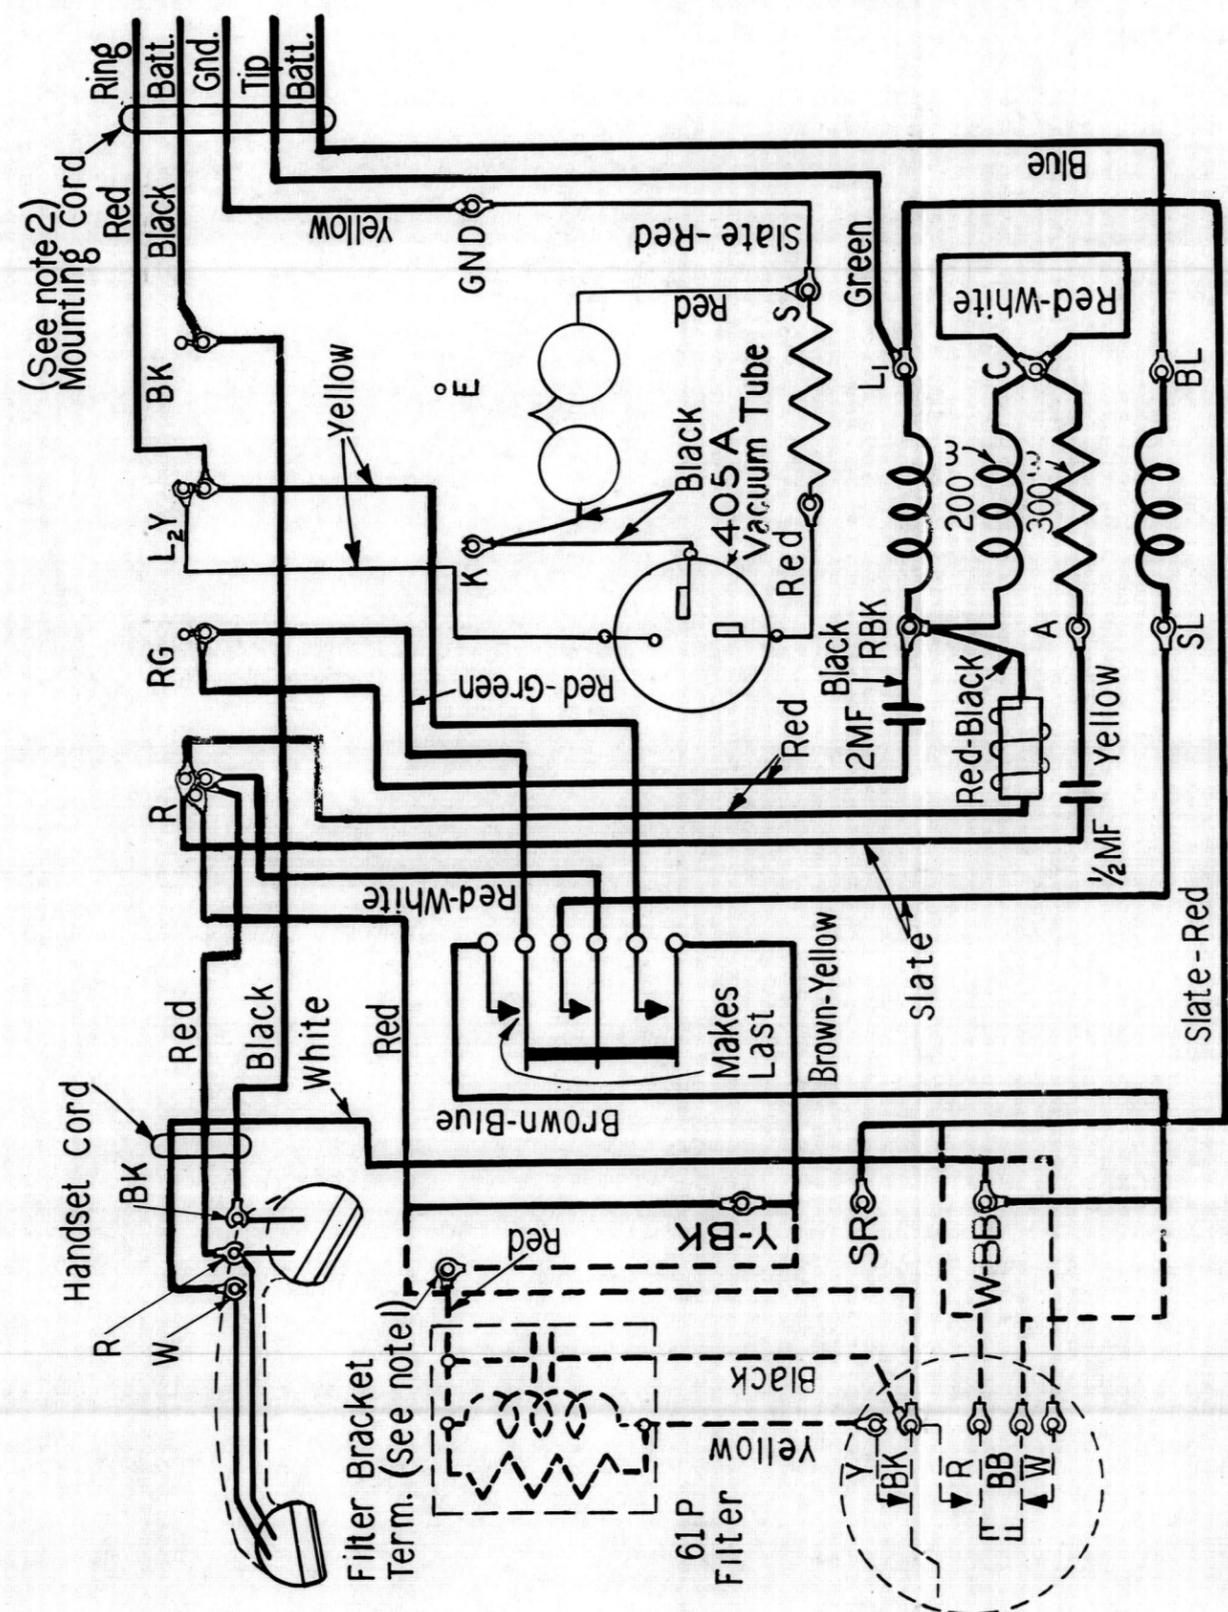

Note 1 If filter is not provided connect brown yellow lead from switch contacts to Y of dial instead of to filter bracket terminal.

Terminals Y-BK, SR and W-BB are on the manual set apparatus blank.

Note 2 On six conductor mounting cord, insulate the cord tip of the unused conductor with WLP Perma Grip Adhesive Dull Litho Coated Paper, or approved equivalent, and store conductor so as not to interfere with moving parts of the set.

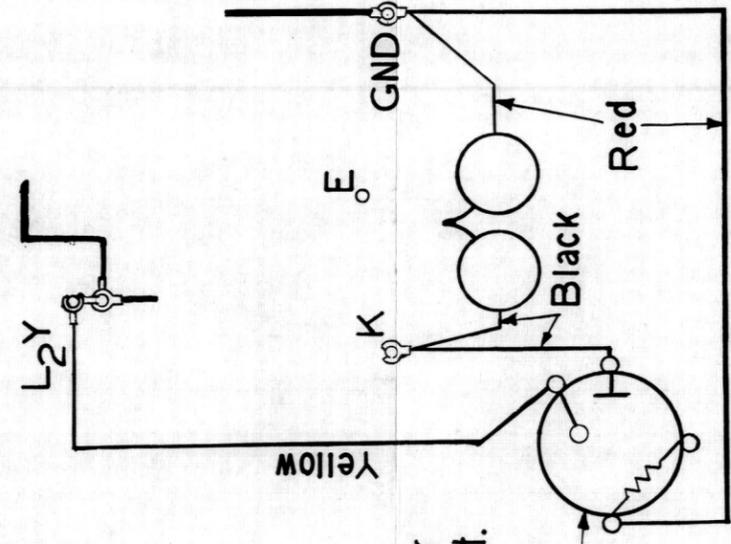

USED ON	DWG.
● DENOTES MANUFACTURE DISCONTINUED	■ DENOTES MANUFACTURE LIMITED
309 TYPE TEL. SET CONNECTIONS	
SCALE	
DRAWN	APPROVED
CHECKED	
WESTERN ELECTRIC CO. INC. ENGINEER OF MANUFACTURE	

LA-

L

DIMENSIONS UP TO AND INCLUDING 72 INCHES EXPRESSED IN INCHES

PRINTED IN U. S. A.

ISSUE 1	8-5-48	
COIL SYMBOLS CHANGED		
DHM	616	
ISSUE 2	4-21-49	
JCU		300
ISSUE 3	6-13-52	
IN TITLE "3RC CG3.118" WAS SPEC.		
E.T.C.		
ISSUE 4	3-16-54	
ADDED-NOTE 2 AND ASSOCIATED REFERENCE		
ISSUE 5	10/5/59	

APPL'S	
CH.	
DR. SCHUMPP	ENG. J.M. MURPHY
BELL TELEPHONE LABORATORIES, INC. NEW YORK	
BL-214623	
LA-	