


When cord is replaced, these and corresponding conductors of other sets shall be placed under mounting cord instead of on top of mounting cord as shown. Later sets have these conductors placed under mounting cord.

Bracket may be bent inward slightly to hold mounting cord conductors in place securely.

These cord tips may be connected to terminals L₁ and L₂Y from left side.

Dress to avoid pinching these conductors between the base plate and the supporting boss on the housing.

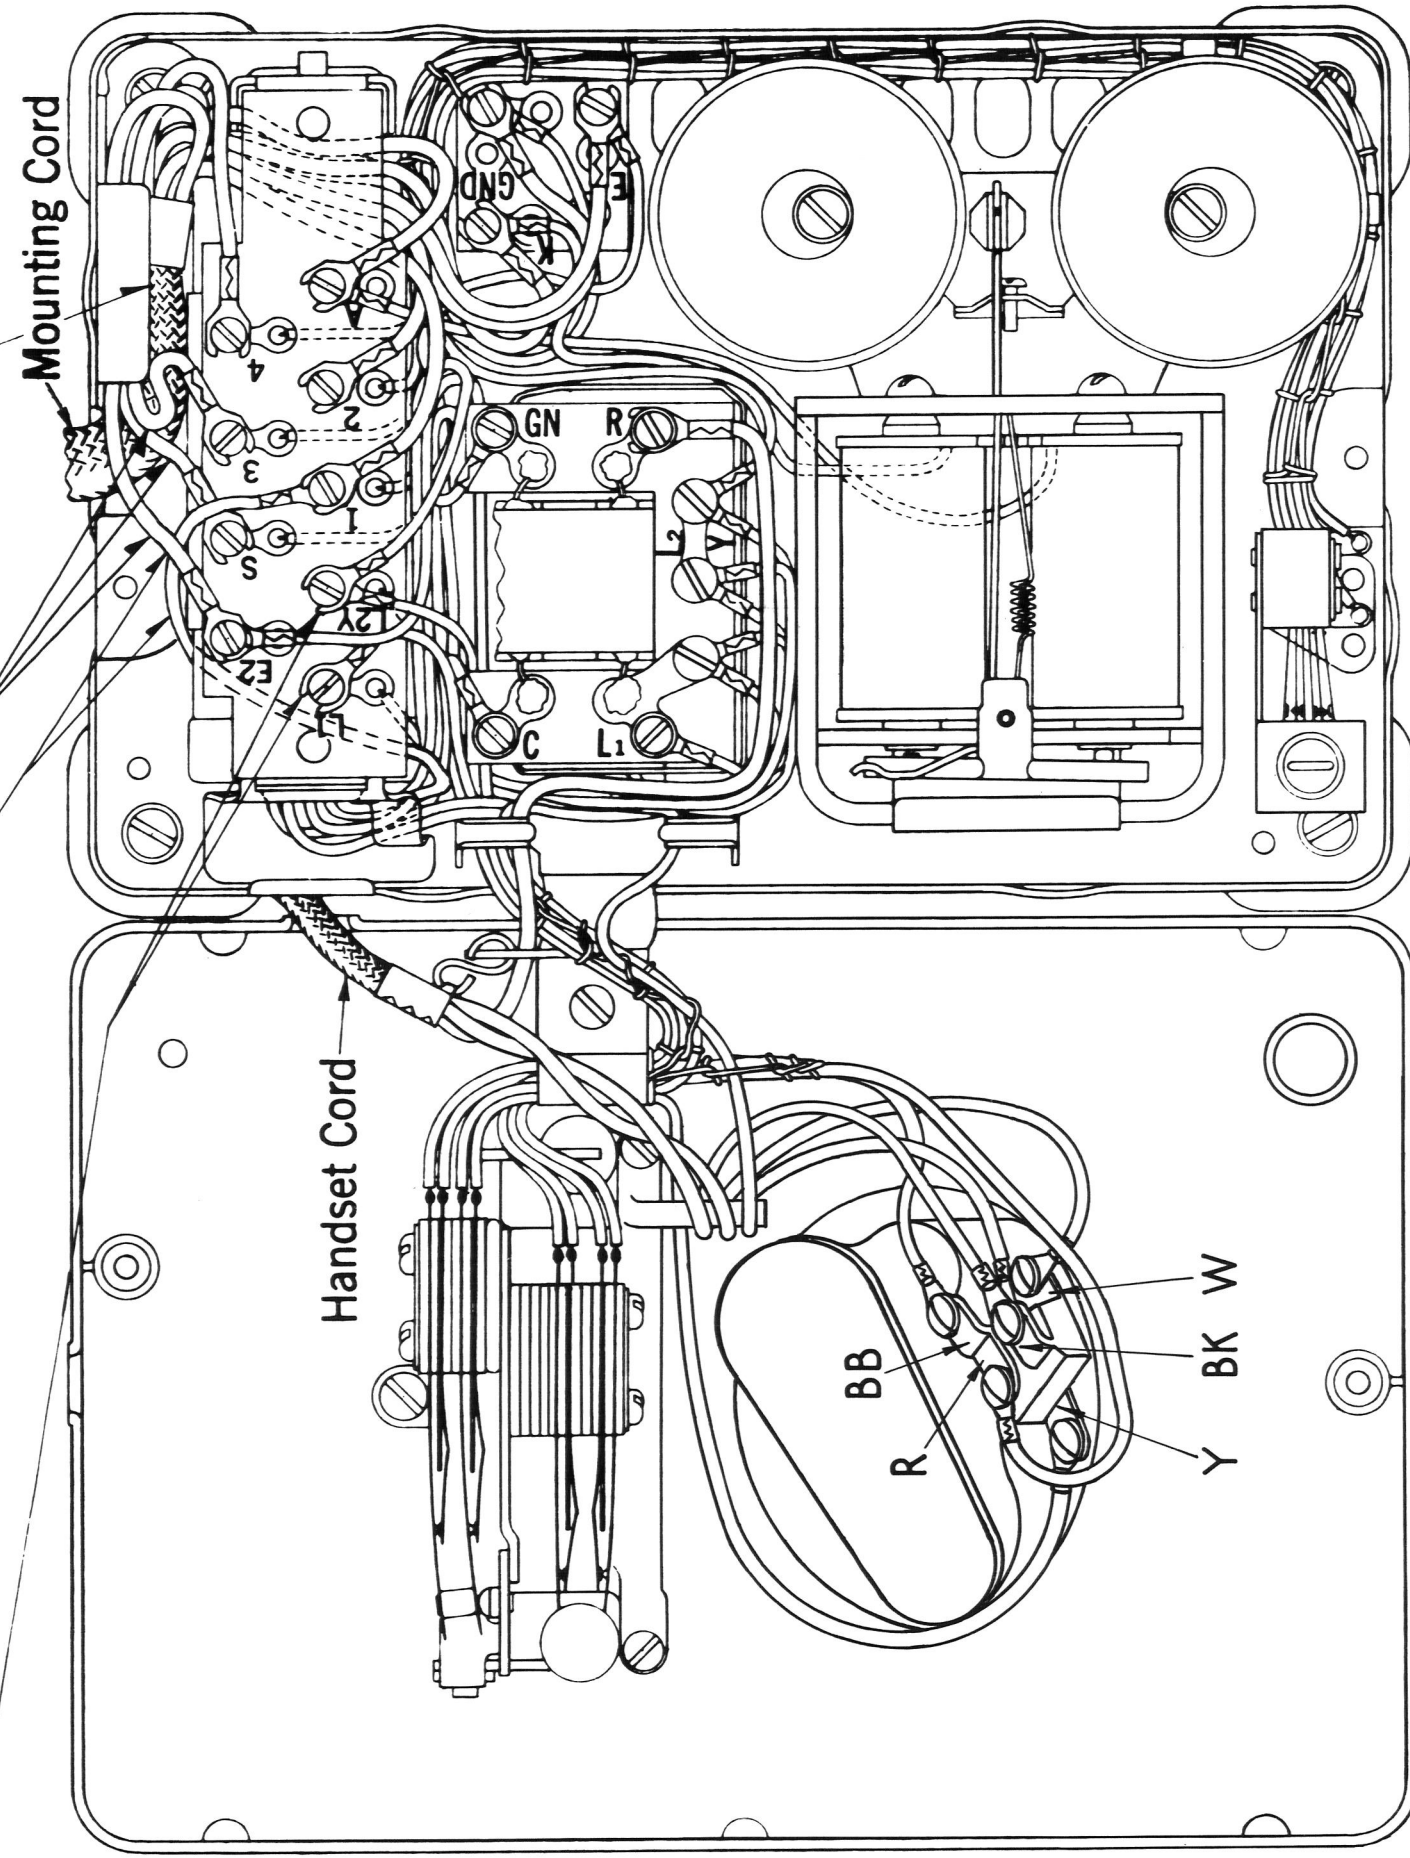

(411CC TEL SET SHOWN)

ISSUE: 1 7-1-52
CHANGED: TITLE WAS
"411CC TEL SET WITH
6 TYPE DIAL"
ADDED: TITLE AT BOTTOM
OF DRAWING.

LM *gve*
chk

ISSUE 2 7-28-55

410, 411 & 412
TYPE TEL SETS
WITH
6 TYPE DIAL
TYPICAL CORDING

C.H. Hamill C.H.H.
SE/J.A.R. *AL*

BELL TELEPHONE
LABORATORIES, INC.
NEW YORK

BL-762131

CR