


SUBSCRIBER SETS — ~~643AT~~ 634AT

COMMON BATTERY — INDUCTION COIL TYPE — CONNECTIONS

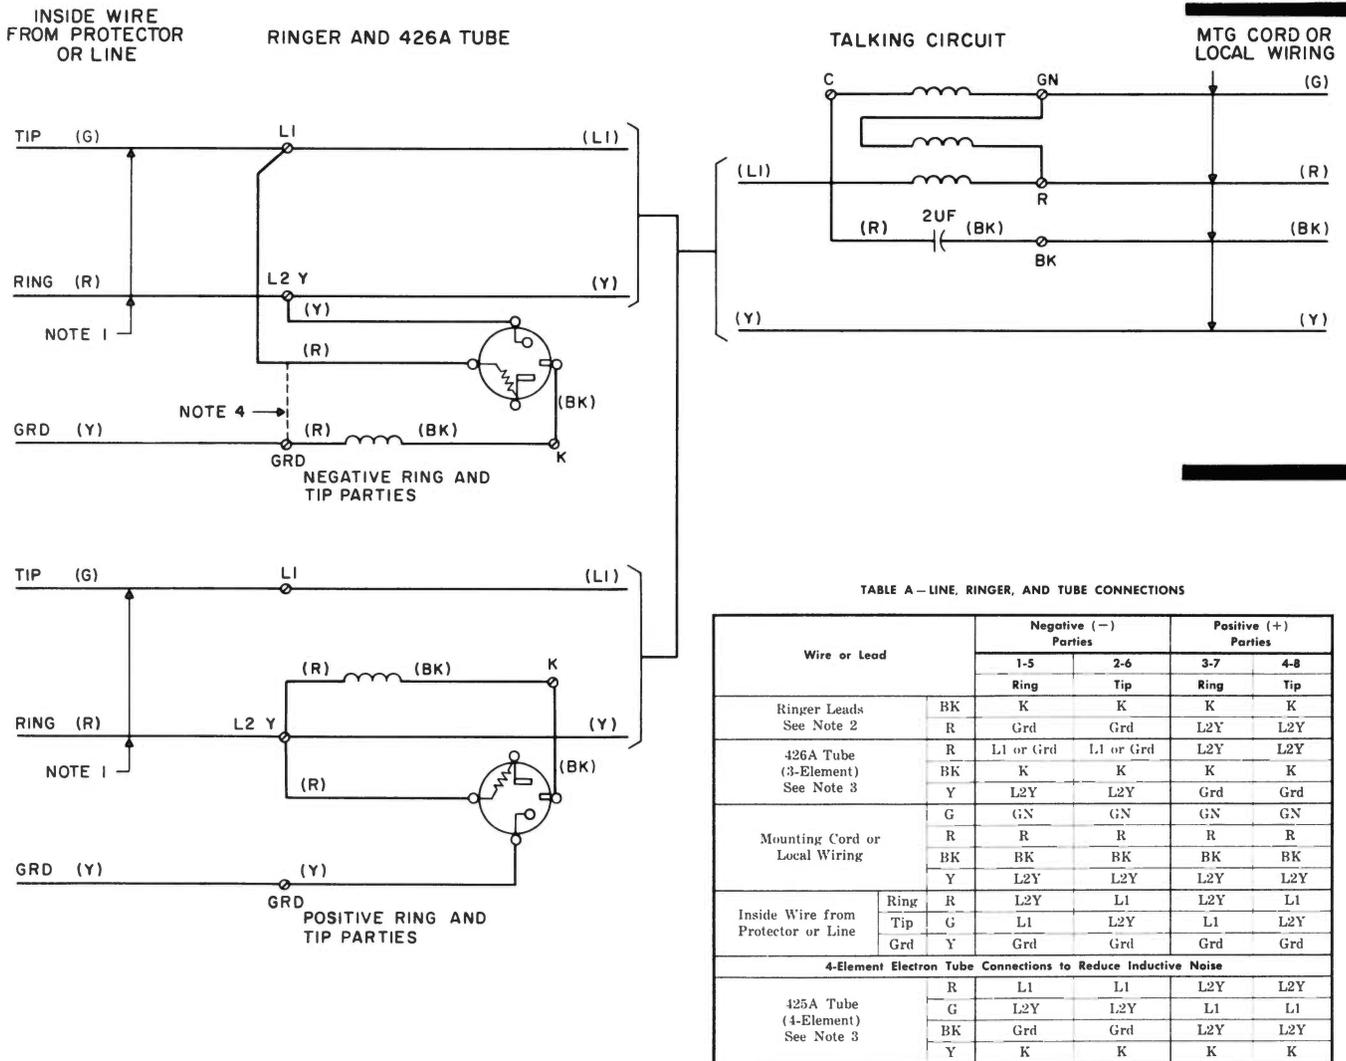

Note 1: Tip and ring reversed for tip party service.

Note 2: To silence ringer permanently, connect the red and black ringer leads to the K terminal.

Note 3: For additional information concerning inductive interference, refer to section entitled Inductive Noise.

Note 4: For negative stations in offices without ANI, R lead from 426A tube may be connected to Grd if ringer operation is marginal.

TABLE B — ASSOCIATED APPARATUS

Class of Service	Hand Tel Sets	
	Hang-up Type	Desk Type
4-Party	201A, B, C, D	202A, B, C, D
Full Selective	211A, B, C, D, J, L	203A, B, C, D, E, F
8-Party	212A, B, C, L	215A, B, C, D
Semiselective	213A, B, C, E	

Fig. 1 — Circuit Diagram for Connection with Hand Telephone Sets