


TELEPHONE SETS
 700 SERIES
 701B CONNECTIONS

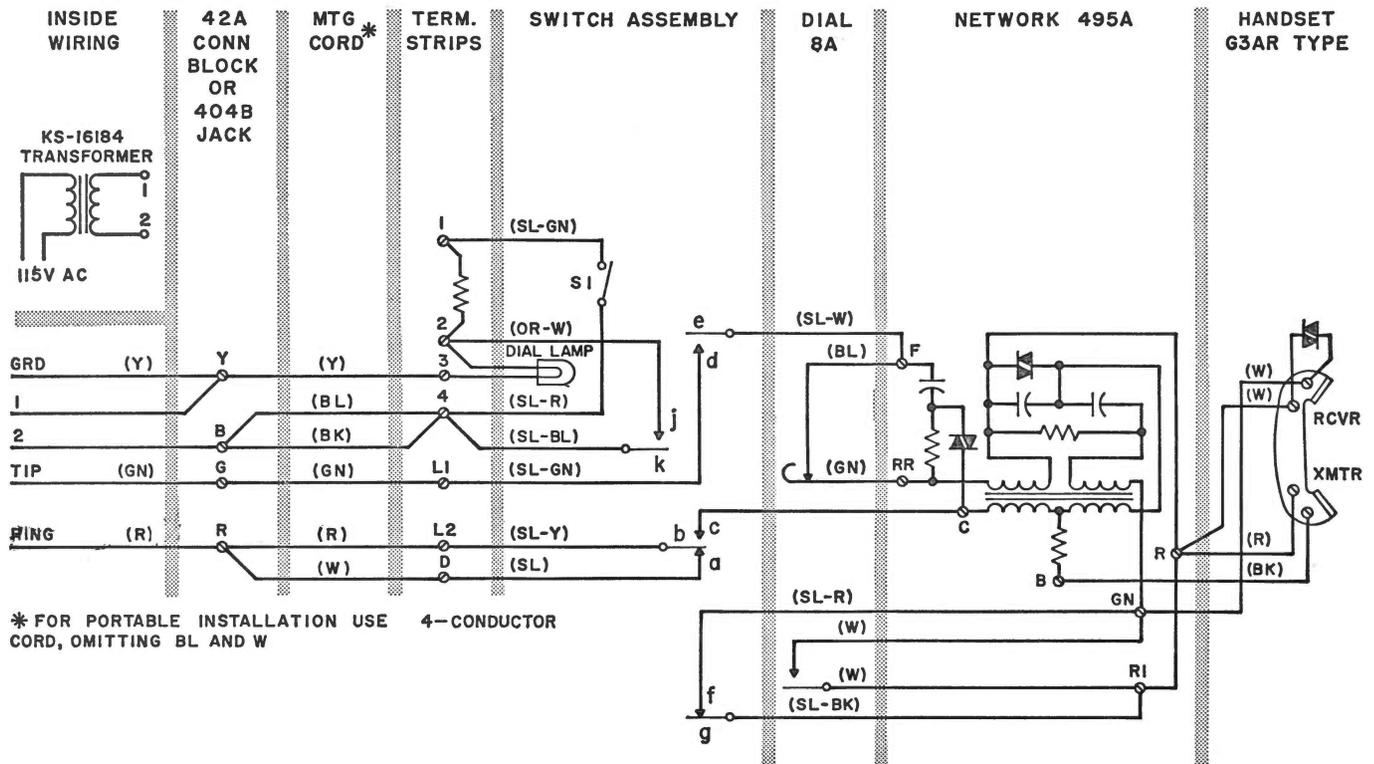

* FOR PORTABLE INSTALLATION USE 4-CONDUCTOR CORD, OMITTING BL AND W

Fig. 1 - 701B Telephone Set without E1A Ringer

TABLE A
 CONNECTIONS WITHOUT RINGER

Wire or Lead		Individual or Bridged	Ring Party	Tip Party*
42A Conn Block	Line	Ring	R	R
		Tip	GN	G
		Grd	Y	Y
	Transformer	1	Y	Y
		2	B	B
	Mounting Cord	R	R	R
		GN	G	G
		Y	Y	Y
		BL	B	B
		W	R	R
Set Term.	Mounting Cord†	BK	B	B
		R	L2	L2
		GN	L1	L1
		Y	3	3
		BL	4	4
		BK	4	4

* To provide tip party message rate, automatic ticketing, etc, with 1000-ohm identification, use E1A ringer with ringer silenced.

† Wired at factory.

SECTION C38.670.4

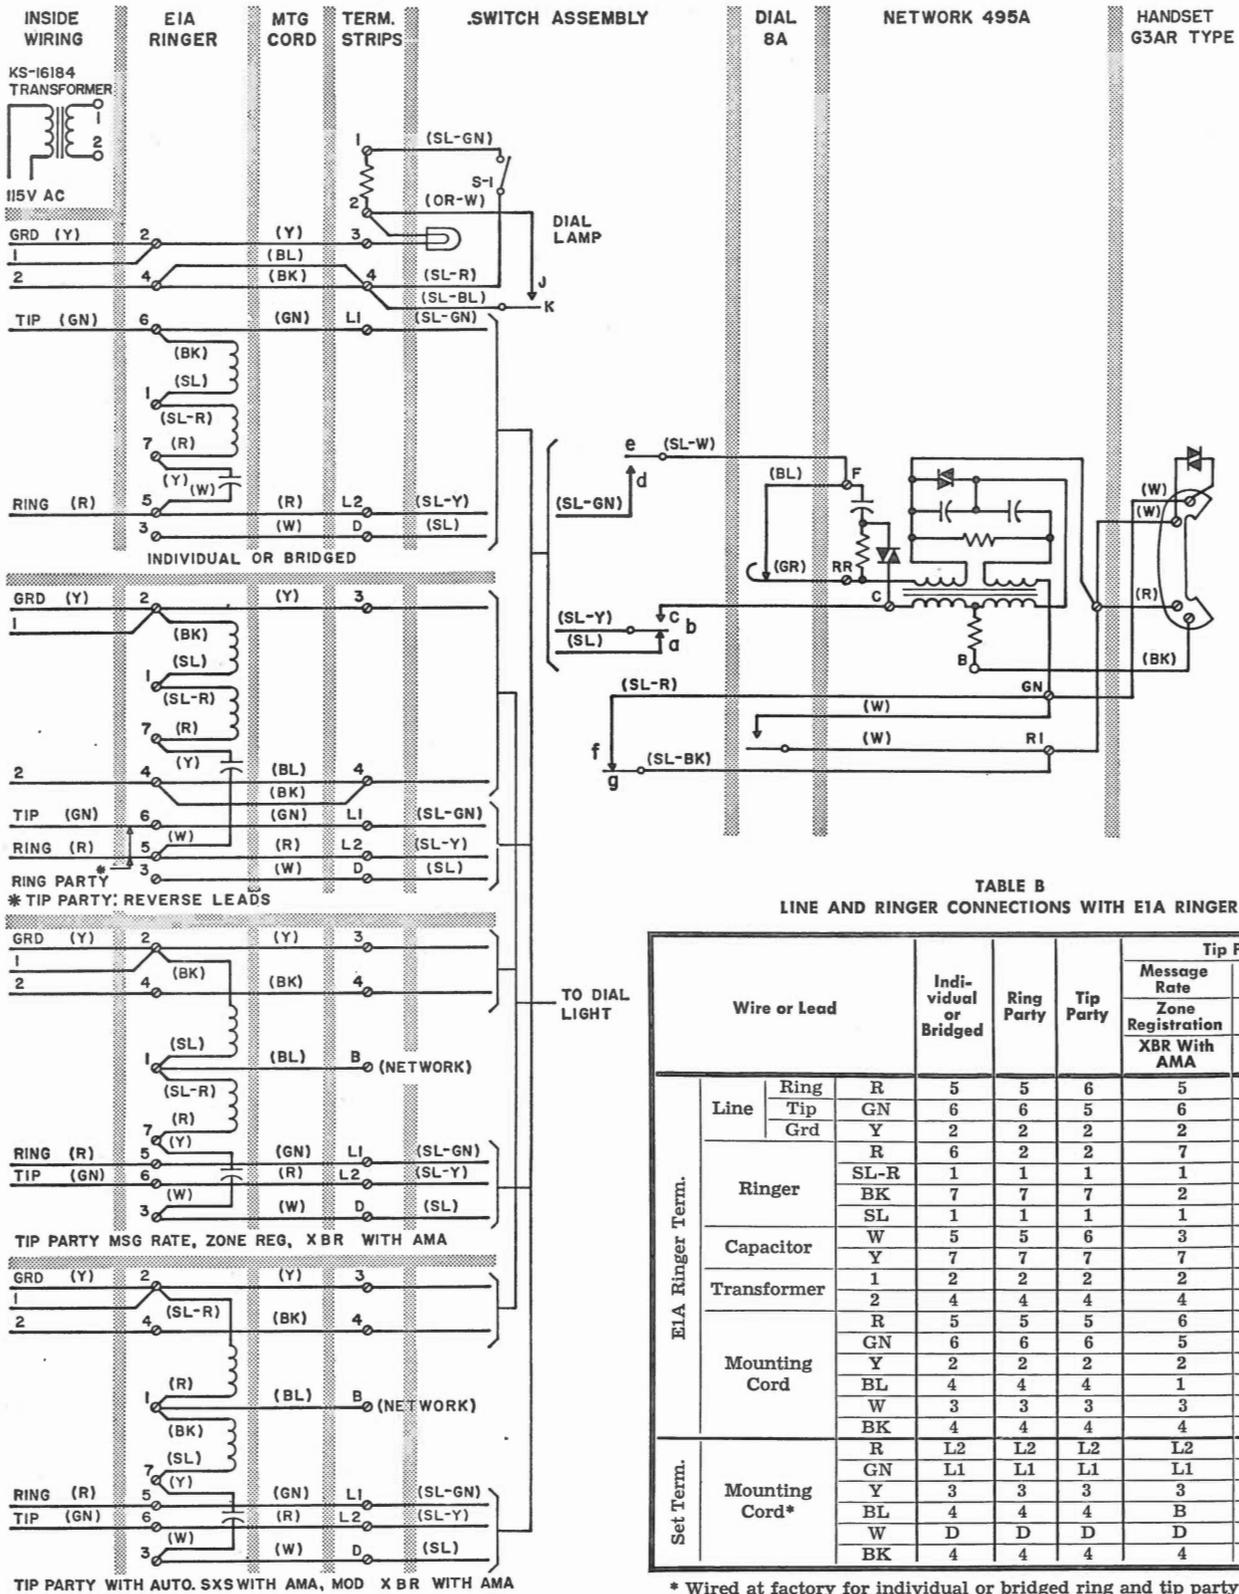


Fig. 2 - 701B Telephone Set with E1A Ringer