


PLAN 103

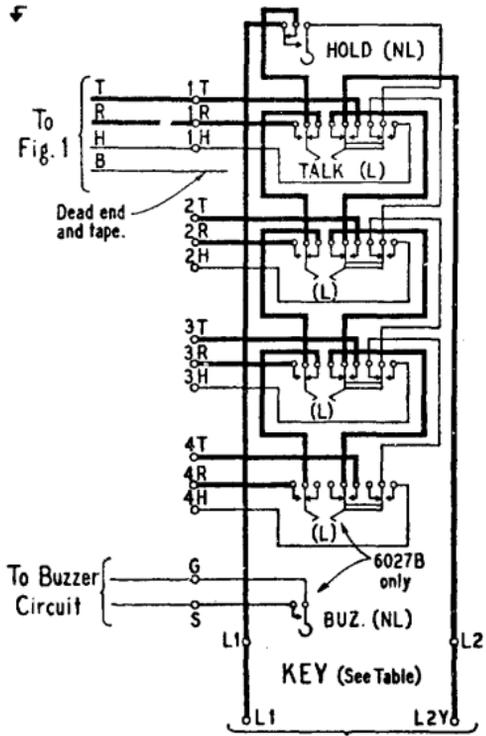

Sub. Set
M STATION
(See Note 4)
FIG. 4

TYPE OF KEY	
Buzzer not used	Buzzer used
6021N (FIG. 4) or 6011A (FIG. 6)	6027B (FIG. 4) or 6011A (FIG. 6) and Buzzer Key

PLAN 103



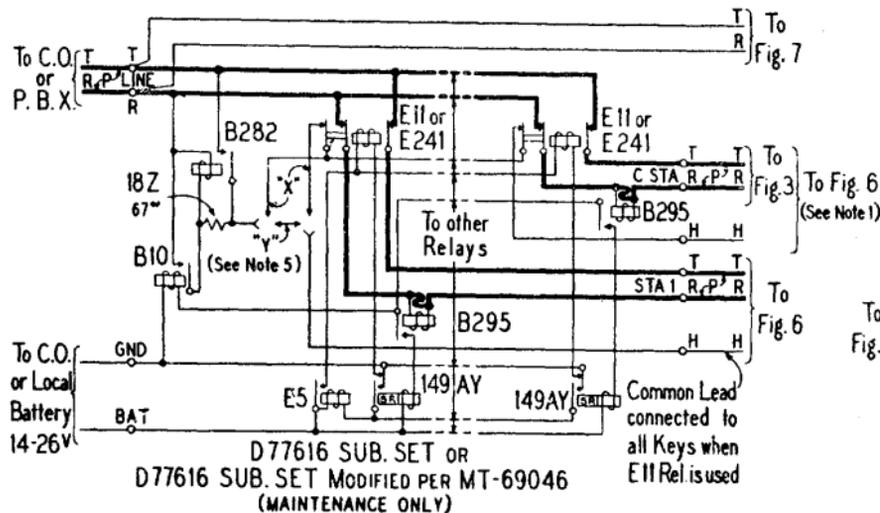


FIG. 5

Notes:

1. If Plan consists of 5 Master Stations, the fifth Station shall be connected to these Terminals.
2. Terminate un-used Cord Conductors on spare Conn. Block Terminals where available otherwise tape them.
3. Transfer red Ringer and yellow Condenser Leads from Terminals 1R and 1T to Terminals A and 2B.
4. Ringers may be located as required and wired per Fig. 2 or 7.
5. "X" Wiring used with E241 Relays, "Y" Wiring used with E11 Relays.

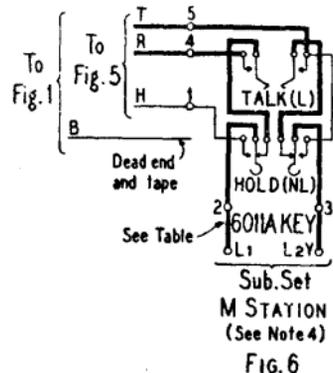

PLAN 103