


ESL-780525 A-

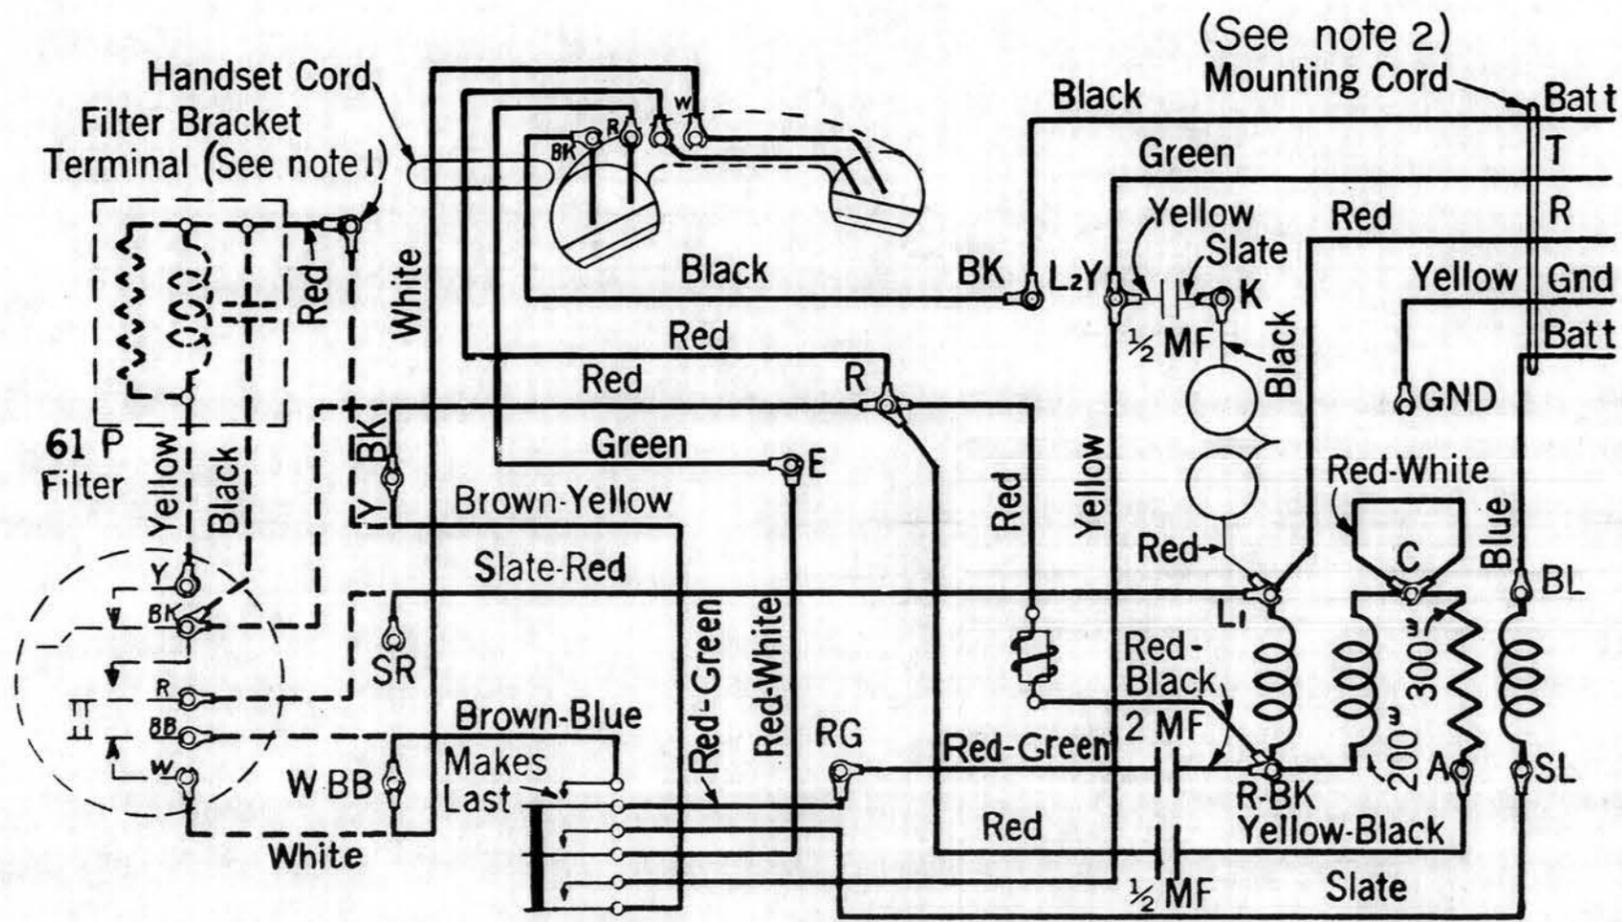

- Note:1 If filter is not provided connect brown yellow lead from switch contacts to Y of dial instead of to filter terminal bracket. Terminals Y-BK,SR and W-BB are on the manual set apparatus blank.
- Note:2 On six conductor mounting cord, insulate the cord tip of the unused conductor with WLP Perma Grip Adhesive Dull Litho Coated Paper, or approved equivalent and store conductor so as not to interfere with moving parts of the set.

B.S.P. C63.45

USED ON DWG.

● - DENOTES MANUFACTURE DISCONTINUED

307 E, F, G & H
TEL. SET CONNECTIONS

SCALE APPROVED

DRAWN CHECKED

WESTERN ELECTRIC CO.
INC.
ENGINEER OF MANUFACTURE

LA-

L

ISSUE 1 7-7-41
THE RED-GREEN LEAD BETWEEN THE RG TERMINAL AND THE 2 MF CONDENSER WAS GREEN THE RED-GREEN LEAD BETWEEN THE RG TERMINAL AND THE SWITCH WAS RED.

F.B.R. C.S. 1

ISSUE 2 7-25-47

B.S.P. C-63.415" WAS SPEC. IN THE TITLE.

RHD 812

ISSUE 3 3-21-55

ADDED-NOTE 2 AND ASSOCIATED REFERENCE

ISSUE 4 10/5/59

LA-

APPL'S			
DR.	M.S.A.	CH.	W. Lab
BELL TELEPHONE LABORATORIES, INC. NEW YORK			
ESL-780525			
LA-			