

BELL SYSTEM PRACTICES
Outside Plant Construction
and Maintenance

SECTION G10.224.2
Issue 2, February, 1956
AT&T Co Standard


GUARDING WORK AREAS
STANDARD WARNING DEVICES,
DESCRIPTION AND USE

1. GENERAL

1.01 This section contains a list of Bell System standard warning devices for use in the protection of work areas. This list may be supplemented by locally approved warning devices. Issue 1 of Section G10.224.2 is cancelled.

2. WARNING DEVICES

2.01 The standard warning devices for guarding work areas together with brief descriptions and sketches, follow.

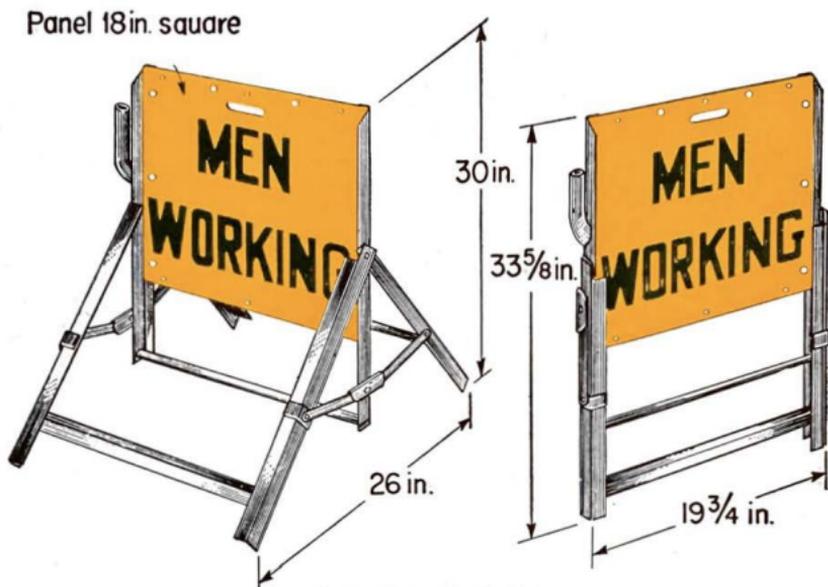

B WARNING SIGN


For use on streets and roads as a warning to traffic of the presence of telephone workmen. The socket at side of frame provides a support for the warning flag.



DEMOUNTABLE WARNING SIGN

For use as a warning to traffic, on manhole guards equipped with sign supporting bracket, or on a B Warning Stand. Upper end of support is tubular to accommodate the warning flag staff.

D WARNING FLAG - (COTTON)
F WARNING FLAG - (NYLON)

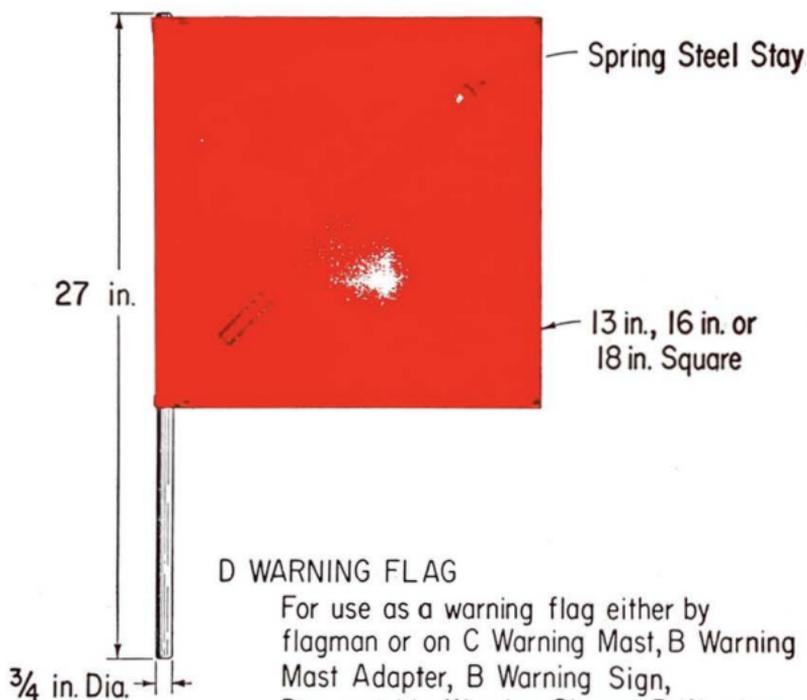


D WARNING FLAG

For use as a warning flag either by flagman or on C Warning Mast, B Warning Mast Adapter, B Warning Sign, Demountable Warning Sign or B Warning Flag Base. Available in red cotton cloth sizes 13 in., 16 in and 18 in.

F WARNING FLAG

Same as D Warning Flag except in red nylon flourescent cloth.

C WARNING FLAG - (COTTON)
E WARNING FLAG - (NYLON)

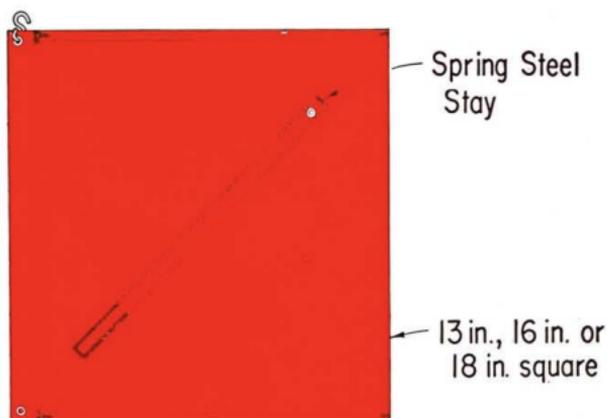


C WARNING FLAG

For use with a B Warning Flag Bracket or Warning Flag Chain as a warning flag. Available in red cotton cloth in sizes 13 in., 16 in. and 18 in.


E WARNING FLAG

Same as C Warning Flag except in red nylon fluorescent cloth.

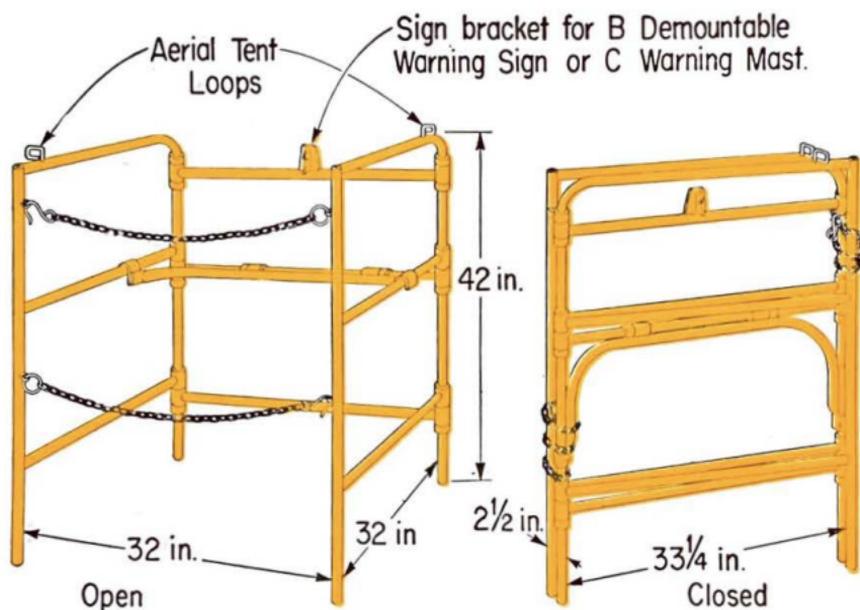


MANHOLE GUARD

For use in guarding open manholes and other small obstructions. May be used as a barricade or warning device. Made of $\frac{3}{4}$ in. steel pipe.

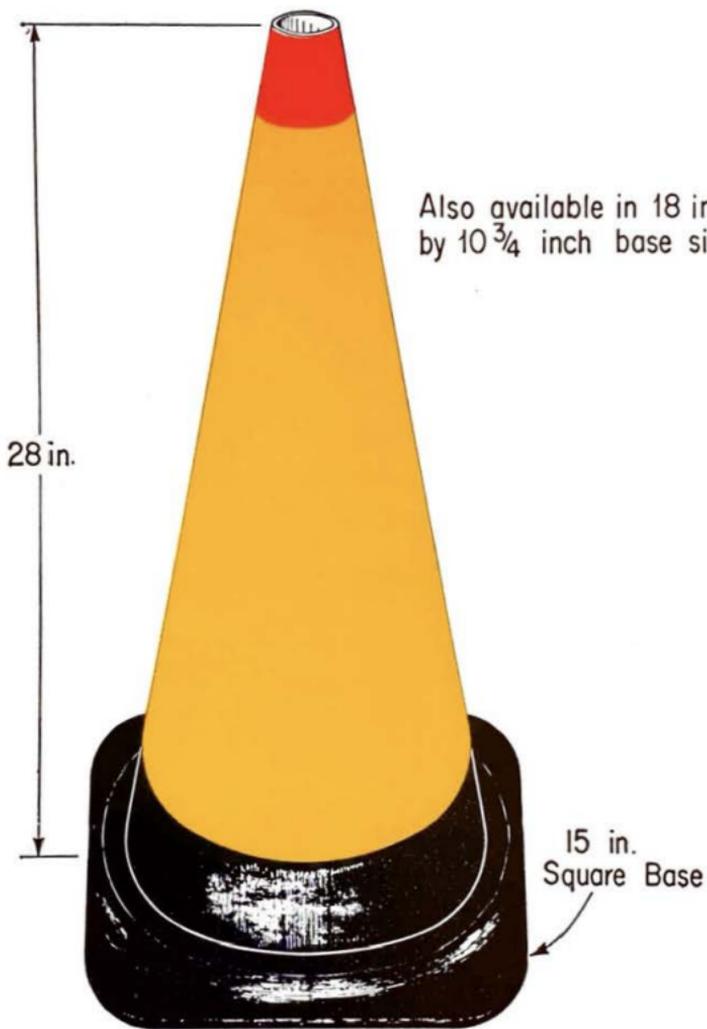


TRAFFIC WARNING CONE

For use in giving drivers of vehicles advance notice as they are approaching working areas and to guide traffic gradually into channels around these locations with minimum congestion. This is a painted hollow rubber cone.

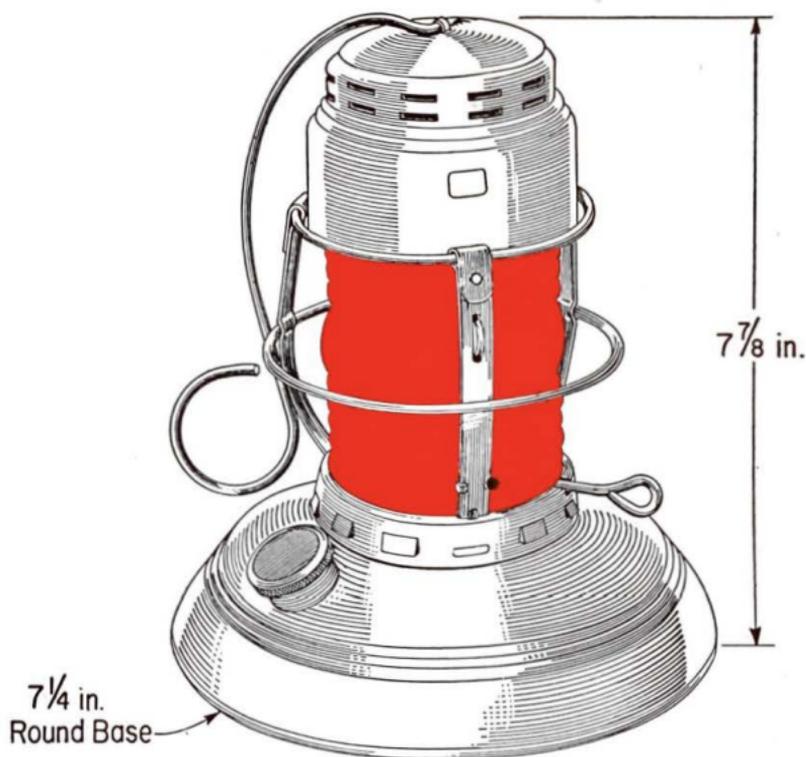


KEROSENE LANTERN

For use as a stationary warning signal. It is equipped with a Fresnel globe. Clear or Ruby globes are available.

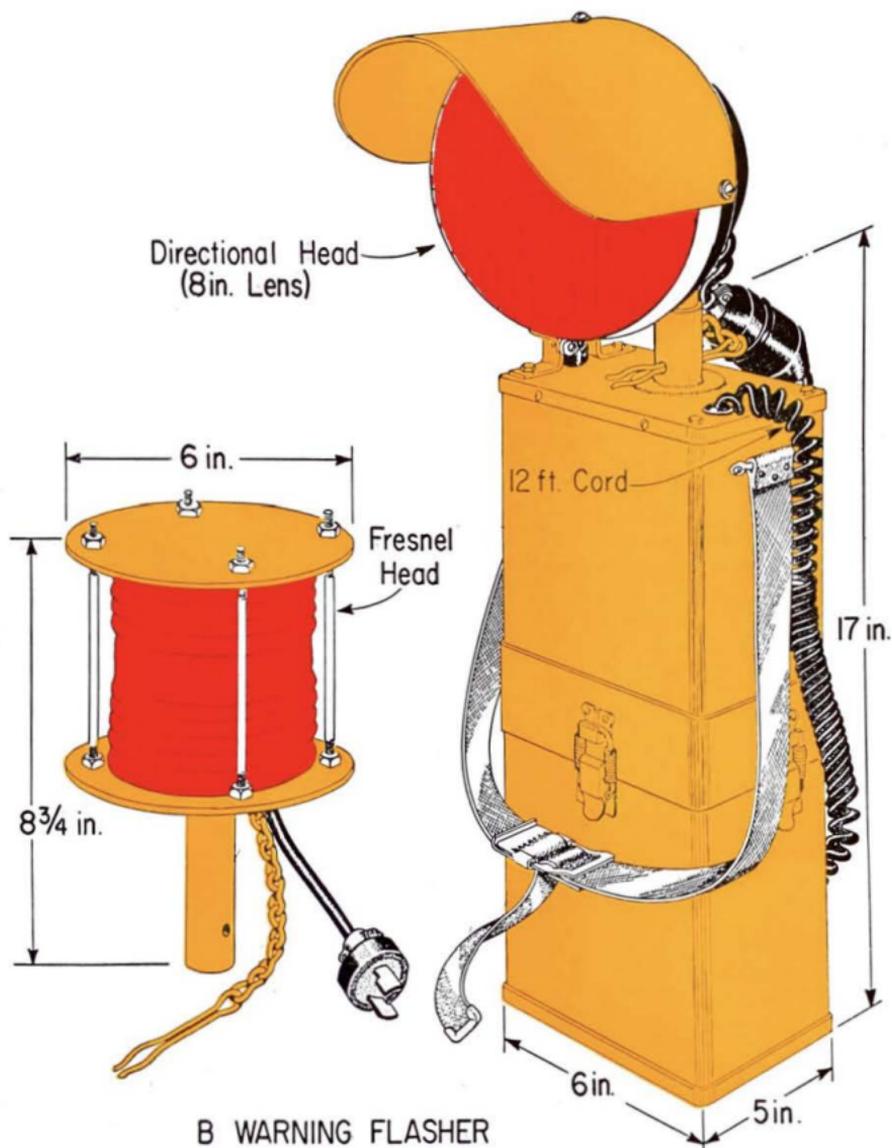


B WARNING FLASHER

For use in conjunction with a B or C Warning Mast and a B Warning Stand to warn traffic. Operated with 5-45 volt dry batteries (KS-14370). Heads may be equipped with red or amber lenses. Heads fit B Warning Mast Bracket.

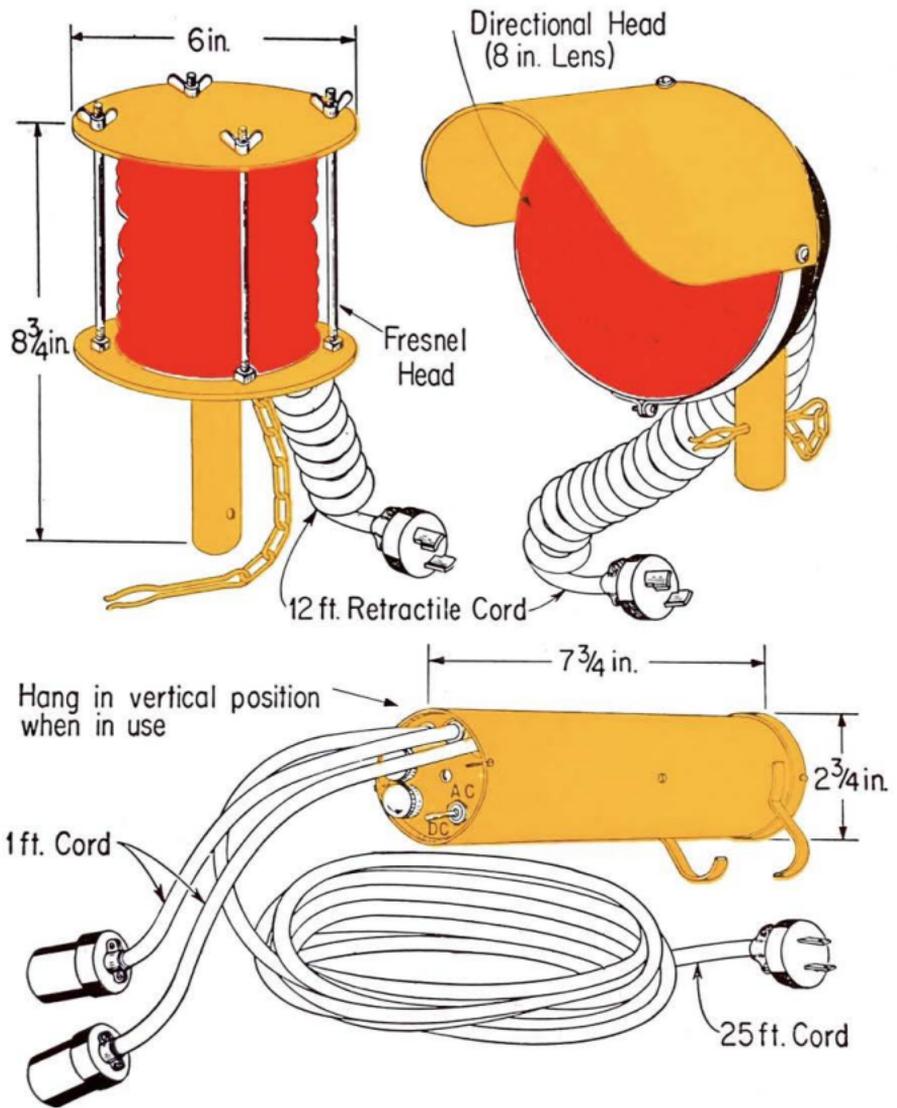


C WARNING FLASHER

For use with B or C Warning Mast and 120 Volt AC or DC Power Source. Also Flasher Heads (Red or Amber Lenses) will fit B Warning Mast Bracket or Adapter Flasher unit will operate one or two flasher heads

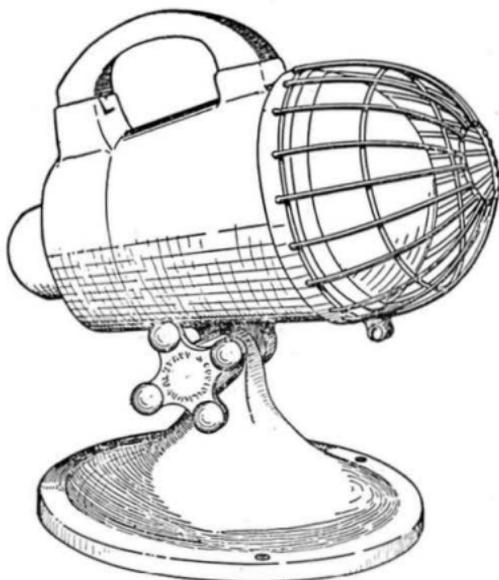


300 WATT FLOODLIGHT

For use in lighting work areas and objects located in work areas. A B Extension Cord (25 feet) is required with this floodlight. Operates from 120 volt AC or DC power source.

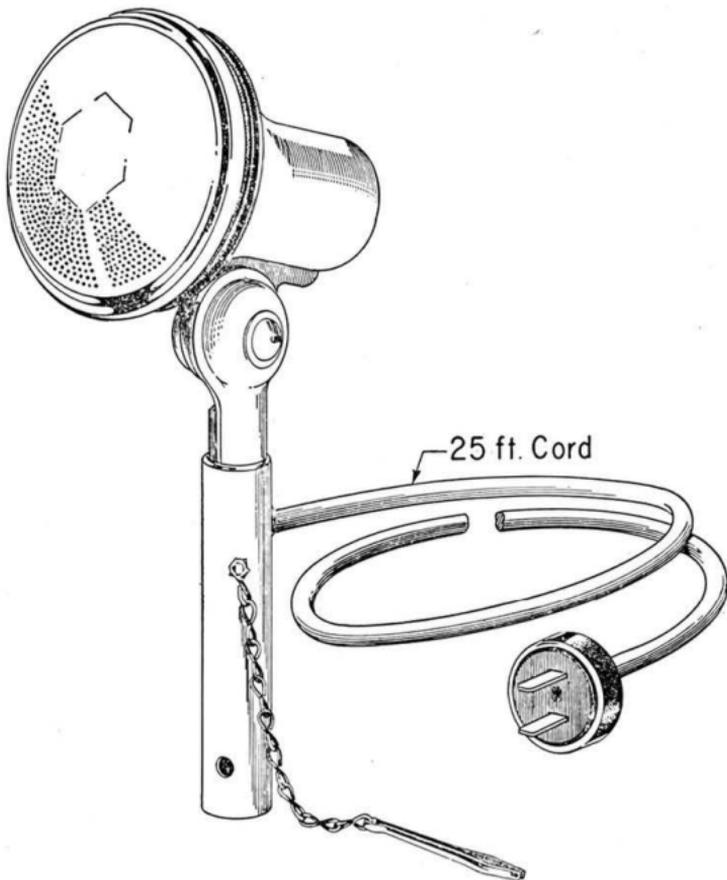


B FLOODLIGHT (150 Watts)

For use in lighting work areas and objects located in work areas. Can be mounted on top of B or C Warning Mast, B Warning Mast Adapter, or with a B Warning Mast Bracket can be mounted below the top of the mast.

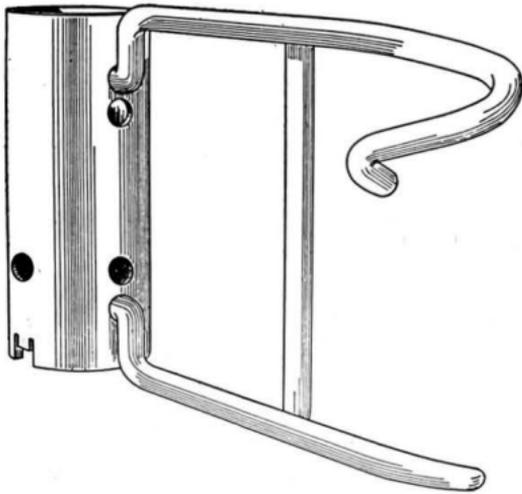



B WARNING MAST BRACKET

For use in mounting B Floodlight or a warning flasher head on B or C Warning Mast at heights below the top.

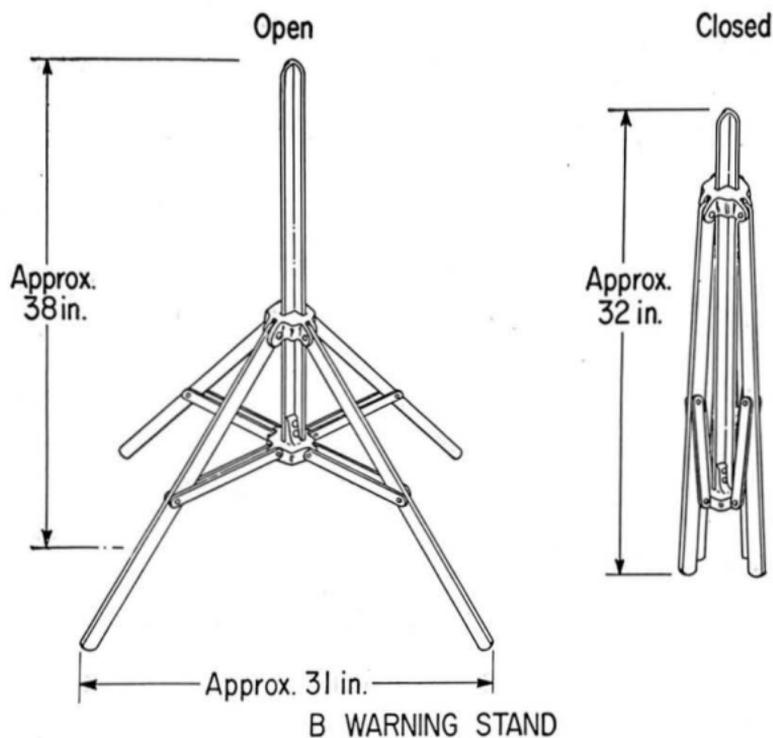


B WARNING STAND

For use in conjunction with the B or C Warning Mast for supporting the B or C Warning Flasher, also as a base for the Demountable Warning Sign.

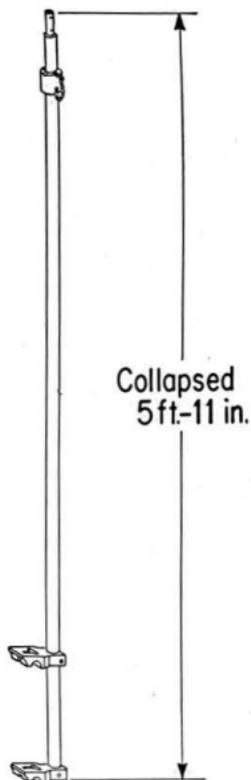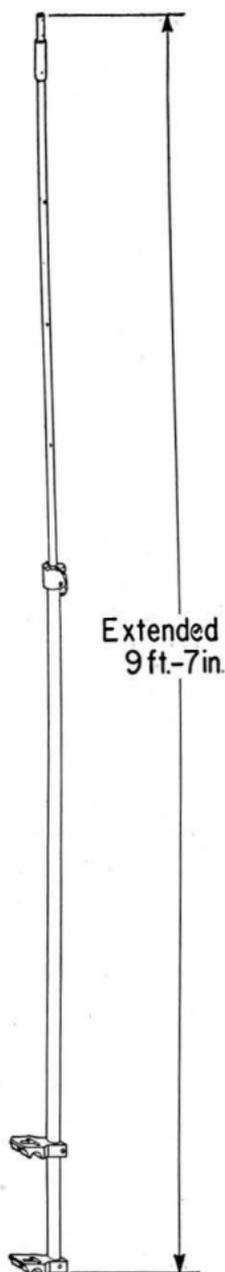


C WARNING MAST

For use with warning stand or manhole guard as a support for the warning flasher and warning flags. A choice of heights from 8 feet to 12 feet in one foot steps is available. Accommodates B Warning Mast Adapter and B Warning Mast Bracket.

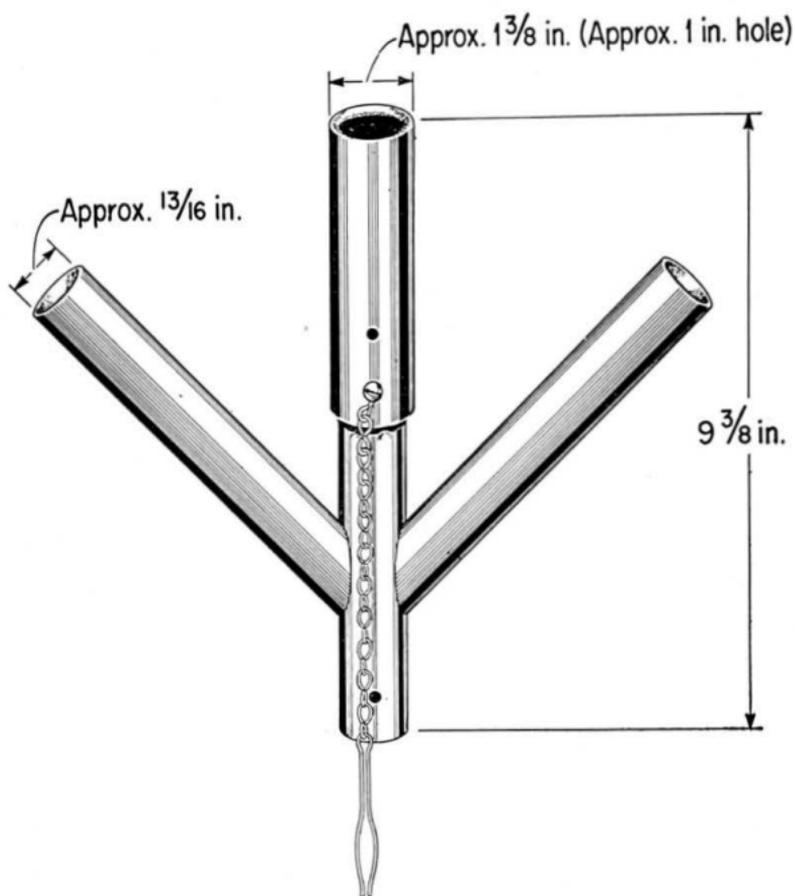


B WARNING MAST ADAPTER

For use on top of warning masts for mounting three warning flags or two warning flags and a warning flasher head.

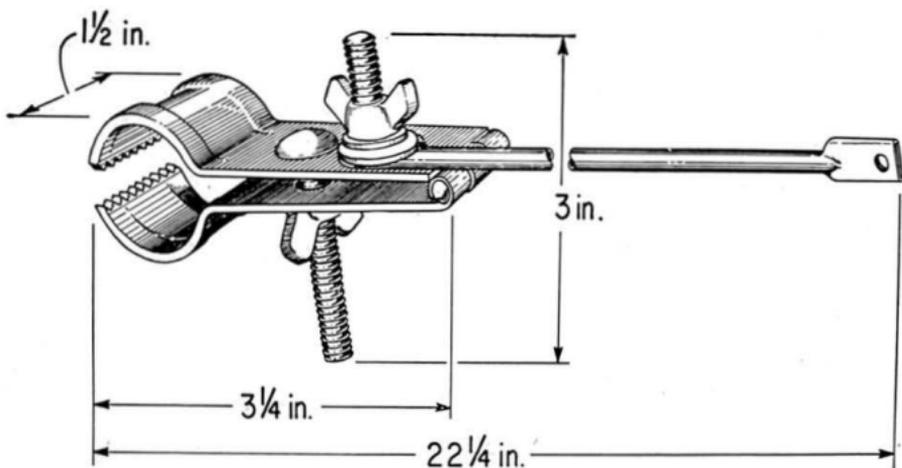

B WARNING FLAG BRACKET


For use in mounting C and E 13", 16", and 18" warning flags on warning masts, manhole guards, barricades, B Warning Signs, ladders, etc.

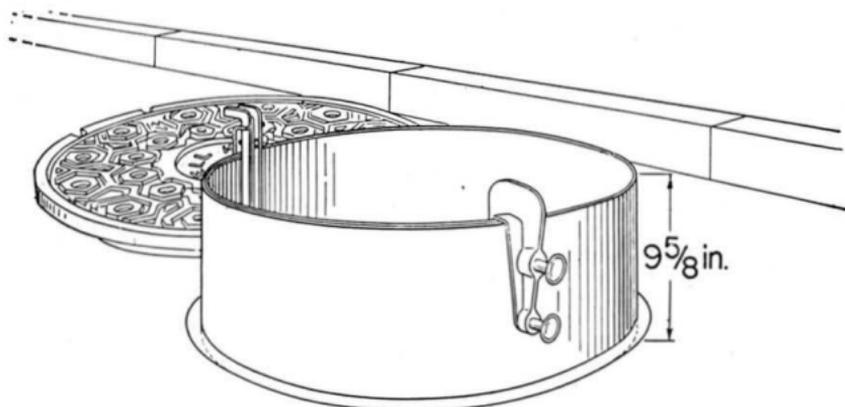

B MANHOLE SHIELD (NATURAL COLOR)


C MANHOLE SHIELD (YELLOW COLOR)

For use in keeping surface water, dirt, rocks and other objects from falling into open manholes. Adjustable to fit seats of manhole frames ranging from 24 in. to 36 in. diameter.

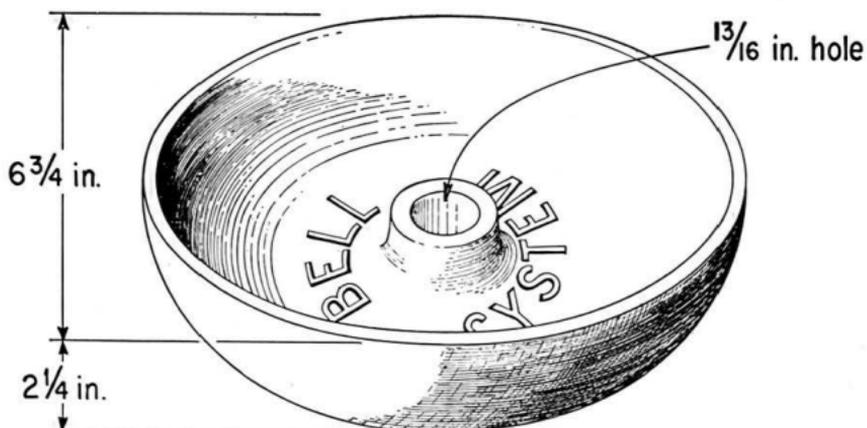

B WARNING FLAG BASE

For use in supporting the D or F Warning Flag in an upright position on the ground. Made of cast iron and, with convex surface down, the base is self righting. Weight about 8 pounds.

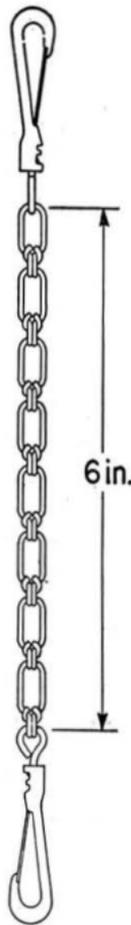

WARNING FLAG CHAIN

For use in suspending the C&E warning flag from tools and materials that overhang on trucks.

2.02 The following sketches illustrate some of the possible combinations of standard warning devices.

