

## HAMMERS AND HATCHETS

### DESCRIPTION AND MAINTENANCE


#### NOTES CONCERNING THIS ADDENDUM

This addendum supplements Section G82. 320.1. It describes the the holes provided in the head of the 1-1/4 pound Drilling Hammer to act as holders for starting drive rings, cancels reference to the Lineman's Hatchet which is not standard in this area, and describes the commercial 1-1/4-pound claw hammer which is standard here.

"See Addendum" should be written at Paragraph 2.05 which is supplemented, at Paragraph 2.12 which is cancelled and should be crossed out, and following Paragraph 2.13 to indicate the inclusion of additional information.


#### 2. DESCRIPTION

2.05 Two holes are provided in the head of the 1-1/4-pound drilling hammer as illustrated below to act as holders for starting the most commonly used sizes of drive rings.

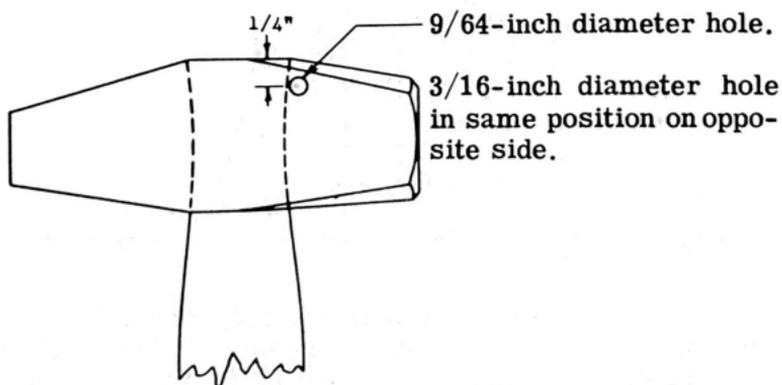

2.12 Cancelled. The lineman's hatchet is not standard in this area.

2.14 One and One-Quarter Pound Claw Hammer is a commercial, straight claw, bell faced hammer for use by the splicing forces and for general light construction work.

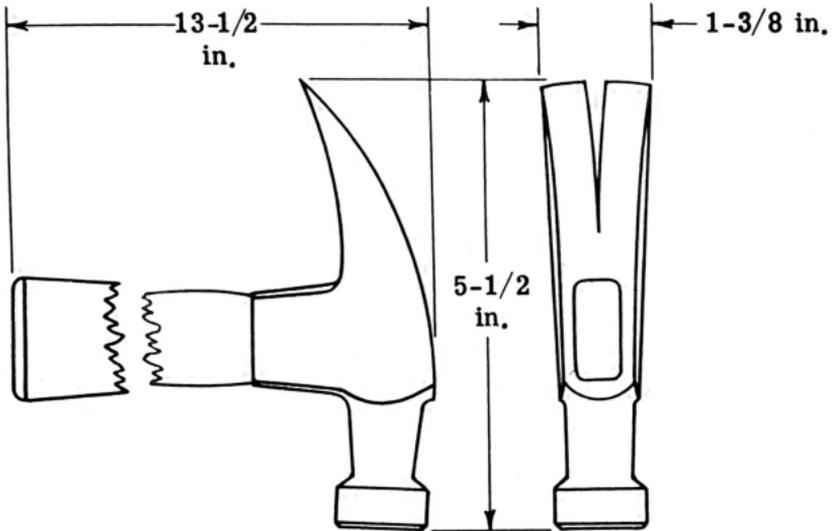

1-1/4 POUND CLAW HAMMER