

TABLE A-FEATURES

EQUIPMENT		EQUIPMENT OR CIRCUIT DATA							SD EQUIVALENT		
DESCRIPTION	REF NOTE	RAT-ING	LIST OR GROUP	QTY	EQUIPMENT OR CIRCUIT	L/G OR FIG	WRG	APP	SCHEMATIC	FIG	OPT
ASSEMBLY, WIRING AND EQUIPMENT FOR ONE DIAL TONE DELAY ALARM UNIT.			1	1	T1A277-11	1	W,U	W			
WIRING AND EQUIPMENT REQUIRED IN ADDITION TO LIST 1 WHEN USED WITH NO.2, 2B OR 3 ESS. DA EFF:02/01/97 FE/RA:NONE		DA	2	1	T*1A277-11	(1)	V	V			
				OMIT 1	T*1A277-11	(1)	W	W			
ALWAYS REQUIRED IN ADDITION TO LIST 1. (PROVIDES NEW MTG PLATE). DA EFF:02/01/97 FE/RA:NONE		DA	A								
WIRING AND EQUIPMENT REQUIRED IN ADDITION TO LIST 1 WHEN USED WITH 5ESS. DA EFF:12/08/94 FE/RA:NONE		DA	B	1	T*1A277-11	(1)	T	T			
				OMIT 1	T*1A277-11	(1)	U,W	W			
END OF TABLE-A											

COPYRIGHT © 1997 LUCENT TECHNOLOGIES
ALL RIGHTS RESERVED

BT99

COMMON ESS SWITCHING EQUIPMENT
ARRANGED WITH 2-WIRE & 4-WIRE FEATURES
SPECIFICATION FOR
DIAL TONE DELAY ALARM UNIT

DWG SIZE C2
ISSUE 23

J1A042BP-1

LUCENT TECHNOLOGIES INC J1A042BP-1

SHEET A2
OF 6

PRINTED IN U.S.A.

CONVERSION TABLE	
INCH	MM
4	101.6

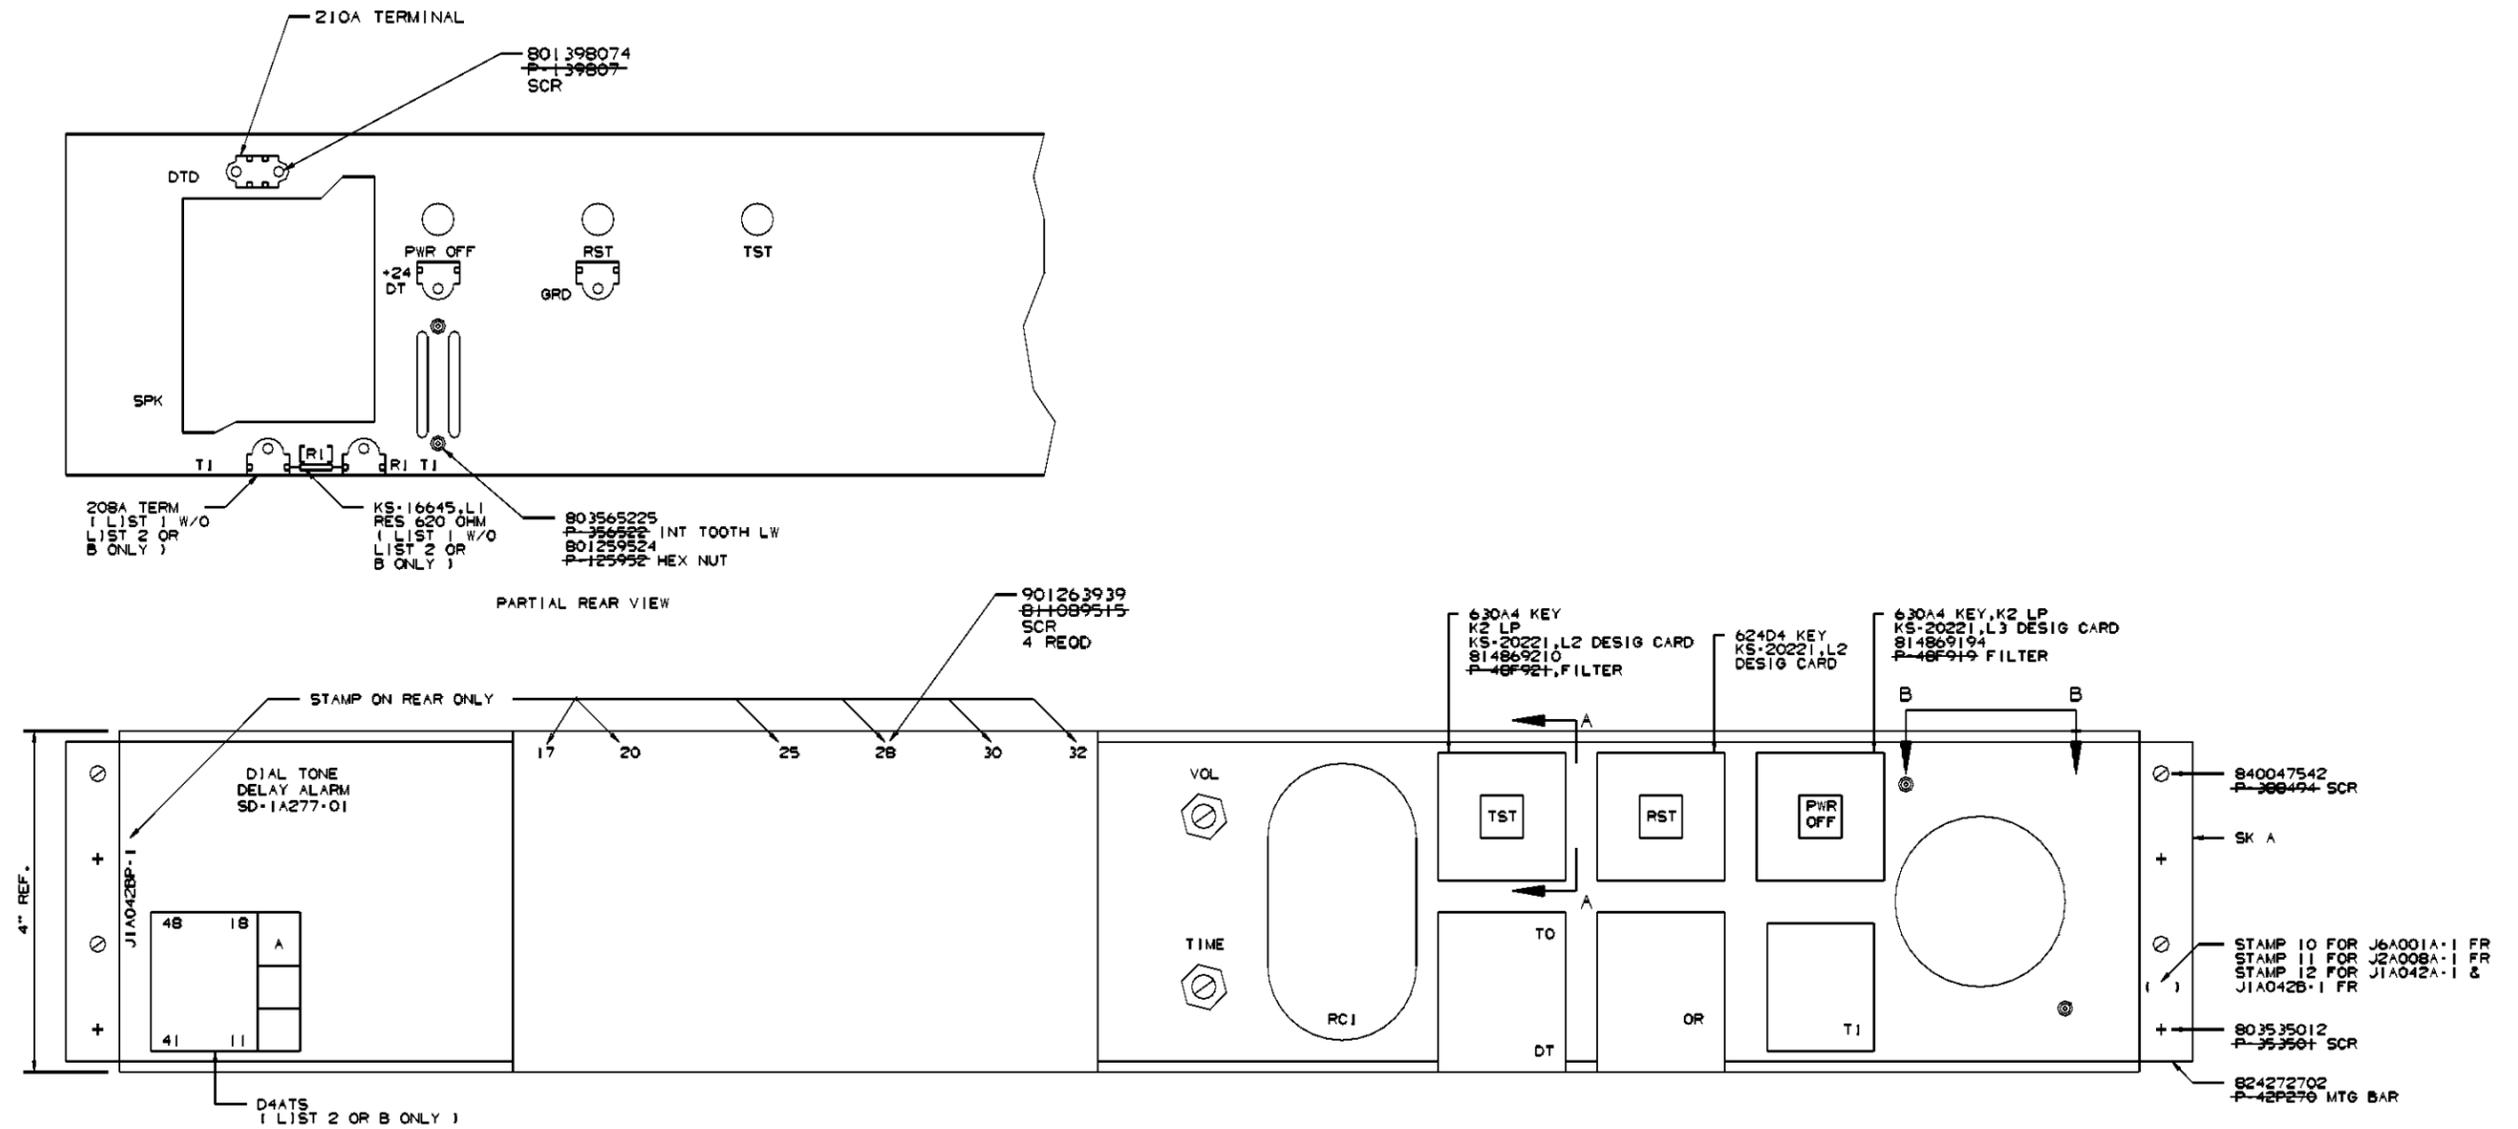




FIG. 1
FRONT VIEW
ALL STAMPING IS FOR
FRONT & REAR EXCEPT AS NOTED

COPYRIGHT 1997 LUCENT, ALL RIGHTS RESERVED		
DIAL TONE RELAY ALARM UNIT	DWG SIZE	ISSUE
	c2	23
LUCENT TECHNOLOGIES INC	J1A042BP-1	SHEET B1

J1A042BP-1

J1A042BP-1 DET A															
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
											A 801		A 802		A 803
											(R)		(R)		(R)

DETAIL A

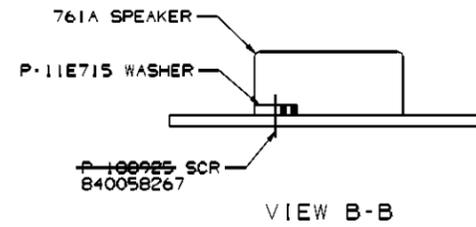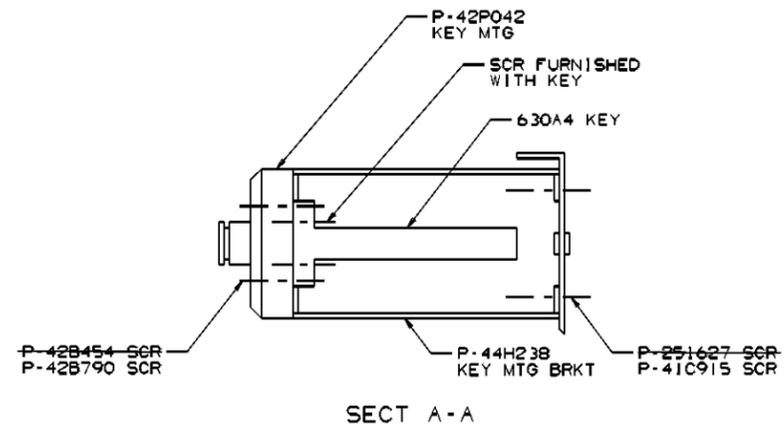

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1010	1	2	824272702	F42P270	BAR, MOUNTING			
1020	A	OMIT 1	101445765	291A0145	PLATE, MOUNTING E/W			
1030	A	1	103258349	291A0J50	PLATE, MOUNTING E/W			
1040	1	1	101445765	291A0145	PLATE, MOUNTING E/W SK A			
1050	1	1	100321579	36A	MOUNTING, APPARATUS POS 63B			
1051	1	1	103157277	36C	MOUNTING, APPARATUS POS 63B E/W			
1060	1	3	100119401	905B	CONNECTOR POS 28,30,32			
1061	1	3	108056714	905B	CONNECTOR POS 28,30,32			
1070	1	1	101486355	A801	PACK, CIRCUIT CLEI = E1PQ36CA POS 28			
1080	1	1	101486363	A802	PACK, CIRCUIT CLEI = E1PQ36DA POS 30			
1090	1	1	101486371	A803	PACK, CIRCUIT CLEI = E1PQ36EA POS 32			
1100	1	1	997353487	KS13790L29	POTENTIOMETER 25000 OHM POS 100A			
1110	1	1	996999744	KS13790L2	POTENTIOMETER 1 MEG POS 100C			
1120	1	1	100108281	120C	COIL REPEATING POS 113B			
1130	1	1	100476985	AK30	RELAY POS 128C			
1140	1	1	100472711	AG32	RELAY POS 143C			
1150	1	1	100769439	2563N	TRANSFORMER POS 158C			
1160	1	1	101150399	630A4	KEY (TST) POS 128A			
1170	1	1	101150209	624D4	KEY (RST) POS 143A			
1180	1	1	101150399	630A4	KEY (PWR OFF) POS 158A			
1190	1	1	814869210	P48F921	LENS, YELLOW			
1200	1	1	814869194	P48F919	LENS, FILTER RED (POWER OFF)			
1210	1	2	400419816	KS20221L2	CARD, DESIGNATION			12
1211	1	3	814834719	P48C471	CARD, DESIGNATION			
1220	1	1	402021776	KS20221L3	CARD, DESIGNATION			12
1230	1	2	102479227	K2	LAMP			
1240	1	3	824270425	P42P042	KEY, MOUNTING			
1250	1	3	841158850		BRACKET, KEY MOUNTING			
1260	1	1	100727183	761A	SPEAKER, LOUD POS 173B			
1261	1	1	846858538		ASSEMBLY, LOUDSPEAKER (761A MOD1) POS 173B			
1270	1	1	997451281	KS16645L1	RESISTOR 620 OHM R1			

STOCKLIST CONTINUED ON SHEET D2

J1A042BP-1

SHOP
IN
ST

MANUFACTURING NOTES

- X PARTS REQUIRED FOR INSTALLATION.
- X/ PARTS REQUIRED FOR MANUFACTURE WHEN EQUIPMENT IS SHOP MOUNTED OR BY THE INSTALLER WHEN THE EQUIPMENT IS TO BE FIELD MOUNTED.
- * PARTS THAT ARE TO BE SHIPPED ATTACHED TO OR ENCLOSED IN THE SAME CONTAINER WITH THE ASSOCIATED ASSEMBLED ITEM.
- */ PARTS (A) REQUIRED FOR MANUFACTURE WHEN EQUIPMENT INVOLVED IS SHOP MOUNTED OR (B) TO BE SHIPPED ATTACHED TO, OR ENCLOSED IN THE SAME CONTAINER WITH THE ASSOCIATED ASSEMBLED ITEM WHEN FIELD MOUNTED.
- () INDICATES DESIGNATIONS TO BE STAMPED IN ACCORDANCE WITH JOB INFORMATION.
- { } INDICATES DESIGNATIONS SHOWN FOR INFORMATION ONLY AND ARE NOT TO BE STAMPED.
- < > INDICATES DESIGNATIONS AND/OR INFORMATION PROVIDED IN ACCORDANCE WITH OTHER INFORMATION.
- "W" PARTS ASSEMBLED AT THE SAME TIME THE EQUIPMENT IS MOUNTED.
- "W*" PARTS TO BE (A) SHOP ASSEMBLED, BUT WHICH CANNOT BE ASSEMBLED UNTIL THE ASSOCIATED EQUIPMENT IS BEING MOUNTED, OR (B) SHIPPED ATTACHED TO, OR ENCLOSED IN THE SAME CONTAINER WITH THE ASSOCIATED EQUIPMENT WHEN FIELD MOUNTED.
- "S" PARTS NOT ASSEMBLED, SHIPPED SEPARATELY.
- A/R AS REQUIRED.
- "B" PARTIAL ASSEMBLIES ON OTHER DRAWINGS WITH STOCKLISTS.
12. THE DESIGNATION SHOWN IN PARENTHESIS () IN THE STOCKLIST AFTER KEY IS TO BE MARKED ON THE DESIGNATION CARD IN ACCORDANCE WITH SPEC. KS-20221.
13. 125A DESIGNATION STRIPS SHALL BE STAMPED AS SPECIFIED IN DETAIL A AND IN ACCORDANCE WITH ED-1A183-11. LETTERS IN BRACKETS INDICATE COLORS TO BE STAMPED R (RED), Y (YELLOW) AND B (BLUE).
14. THIS DRAWING NOW REFLECTS BOTH METRIC AND INCH DIMENSIONS.

COPYRIGHT © 1997 LUCENT TECHNOLOGIES
ALL RIGHTS RESERVED

BT99

COMMON ESS SWITCHING EQUIPMENT
ARRANGED WITH 2-WIRE & 4-WIRE FEATURES
SPECIFICATION FOR
DIAL TONE DELAY ALARM UNIT

DWG SIZE C2 ISSUE 23

LUCENT TECHNOLOGIES INC J1A042BP-1

SHEET D1 OF 6

PRINTED IN U.S.A.

STOCKLIST								
ITEM NBR	LIST GROUP CODE	QTY PER CODE	PRODUCT IDENTIFIER	CODE	DESCRIPTION	REFERENCE POSITION	NOTE	
							SYM	NBR
1280	1	4	100744192	208A	TERMINAL POS 143B,158B,166C, POS 176C			
1290	1	1	100744200	210A	TERMINAL POS 175A			
1300	2,B	OMIT 1	997451281	KS16645L1	RESISTOR 620 OHM R1			
1310	2,B	OMIT 2	100744192	208A	TERMINAL (A) POS 166C &176C			
1320	2,B	1	100734854	D4A	STRIP, TERMINAL POS 08C			
1325	B	1	100044262	535GB	CAPACITOR 1.09 UF POS 08C C1			
1330	1	2	801809232	F180923	SCREW, SPECIAL PAN HEAD MACHINE .112-40 X 3/8 STEEL 289A FINISH			
1340	1	2	840058267		SCREW, PAN HEAD MACHINE .112-40 X 3/8 STEEL 289A FINISH			
1350	1	6	814224549	F42B454	SCREW, BINDING HEAD .138-32 X 3/8 SELF TAPPING			
1351	1	6	814227906	F42B790	SCREW, PAN HEAD SELF TAPPING .138-20 X 3/4			
1360	1	6	802516276	F251627	SCREW, PAN HEAD SELF TAPPING .138-32 X 3/8			
1361	1	6	814139150	F41C915	SCREW, PAN HEAD SELF TAPPING .138-20 X 5/8 STEEL 289A FINISH			
1370	1	2	801259524	F125952	NUT, HEXAGON .138-32 STEEL 289A FINISH			
1380	1	2	811157155	F11B715	SPACER, FIBER .128 X .312 X .125			
1390	1	2	803565225	F356522	WASHER, INTERNAL TOOTH LOCK .138 STEEL 289A FINISH			
1400	1	2	803535012	F353501	SCREW, SPECIAL ROUND HEAD MACHINE .216-24 X 5/16 STEEL 289A FINISH			
1410	1	4	803884949	F388494	SCREW, PAN HEAD SELF TAPPING .216-24 X 3/4			*/
1420	1	4	840047542		SCREW, PAN HEAD SELF TAPPING .216-14 X 3/4 STEEL 289A FINISH			*/
1425	1	4	811089515	F10H951	SCREW, HEXAGON WASHER HEAD .138-20 X 3/4 SELF TAPPING			
1426	1	4	901263939		SCREW, PAN HEAD TORX .138-32 X 3/4IN LG, STEEL 289A ZINC FINISH CAMCAR			
1430	1	1	824971659	F49P165	CARD, DESIGNATION FRONT POS 63			
1440	1	1	824976656	F49P665	CARD, DESIGNATION REAR POS 63			
1450	1	1	101549731	125A	STRIP, DESIGNATION BLANK DET A POS 63			13
1455	B	OMIT 2	824272702	F42P270	BAR, MOUNTING			
1460	1	8	801398074	F139807	SCREW, FLAT HEAD MACHINE .138-32 X 11/32			
1465	2,B	OMIT 2	801398074	F139807	SCREW, FLAT HEAD MACHINE .138-32 X 11/32			
1470	B	2	900082355	KS7851L3	SLEEVE BLACK 16 X 1 LONG			

***** END OF STOCKLIST *****

COPYRIGHT © 1997 LUCENT TECHNOLOGIES
ALL RIGHTS RESERVED

BT99

COMMON ESS SWITCHING EQUIPMENT
ARRANGED WITH 2-WIRE & 4-WIRE FEATURES
SPECIFICATION FOR
DIAL TONE DELAY ALARM UNIT

DWG SIZE C2 ISSUE 23

J1A042BP-1

LUCENT TECHNOLOGIES INC J1A042BP-1

SHEET D2 OF 6

PRINTED IN U.S.A.