

FIG. 1 - TEST CIRCUIT


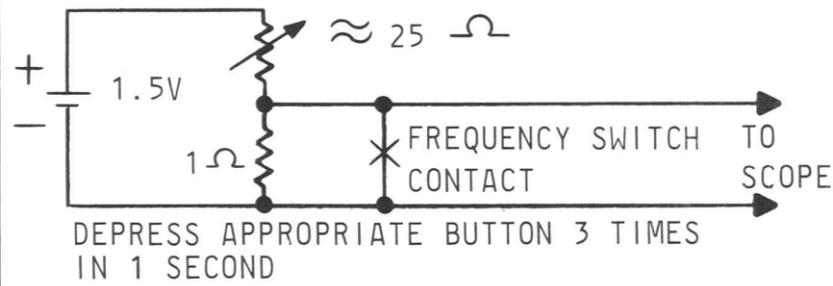


FIG. 2 - ACCEPTABLE CONTACTS

A - BEST

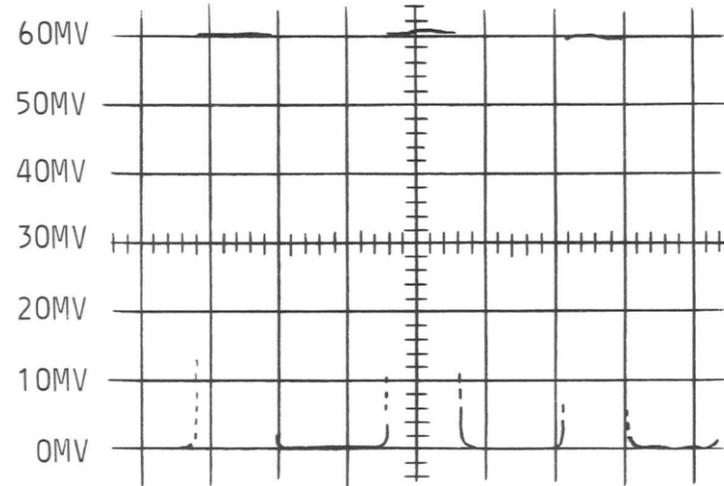

B - SATISFACTORY






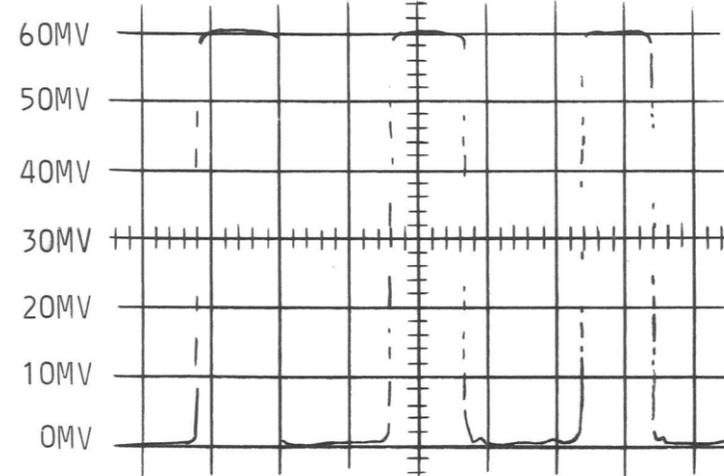


FIG. 3 - UNACCEPTABLE CONTACTS

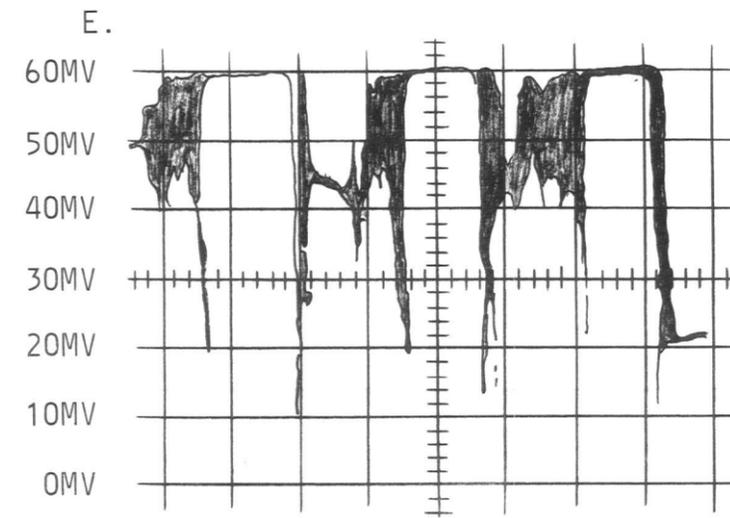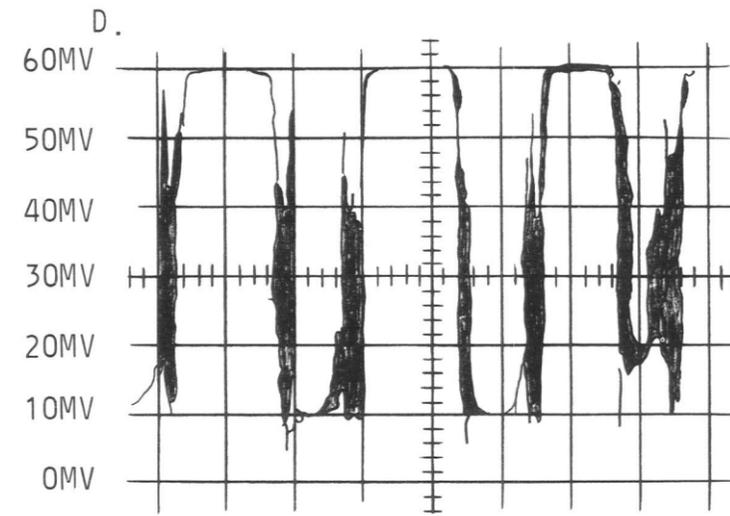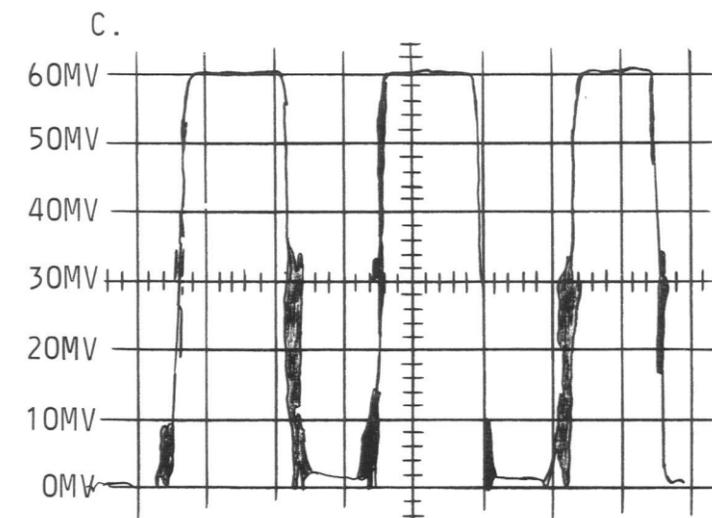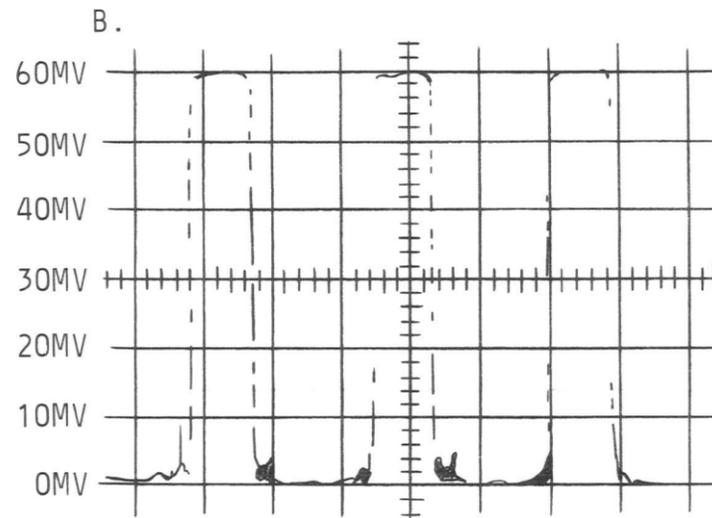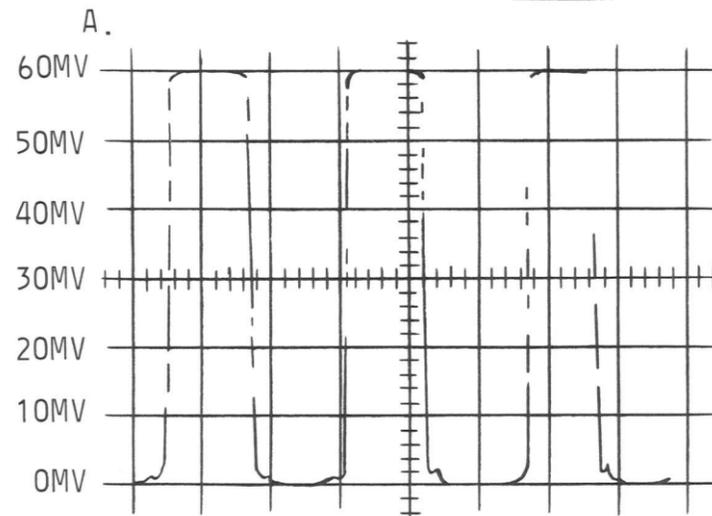

NOTES:

1. DRAWING ARE BASED ON PHOTOS MADE USING A TEKTRONIX 564 STORAGE OSCILLOSCOPE.
2. FIGURES 3A THROUGH 3E SHOW CONTACTS WITH INCREASING AMOUNTS OF CONTAMINATION.

MATERIAL

FINISH

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NONLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:
 TO 2 DECIMAL PLACES ± AS ANGLES ±
 TO 3 DECIMAL PLACES ±
 FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 16,003, PART 2, SECTION 227.

DWG SIZE
2S

P-	
ENGR J. MARTIN	CHKD K.S.
DRAWN C.S. DES 68-51	REV R.V.B.
1-11-68	ISSUE 1

USED ON DWG

TOUCH-TONE
DIALS
CONTACT
PERFORMANCE

SCALE NONE

WESTERN ELECTRIC CO. INC.
ENGINEER OF MANUFACTURE

BELL TELEPHONE
LABORATORIES
INCORPORATED

L-760 401
P-

BSR 41.923