
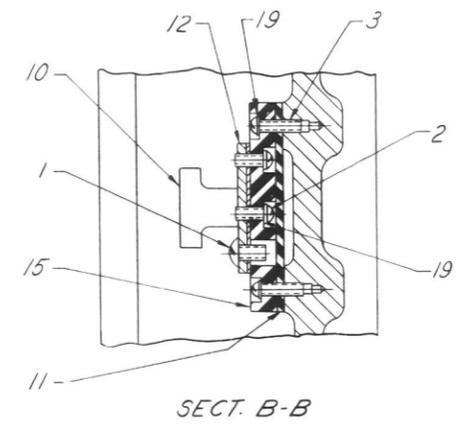
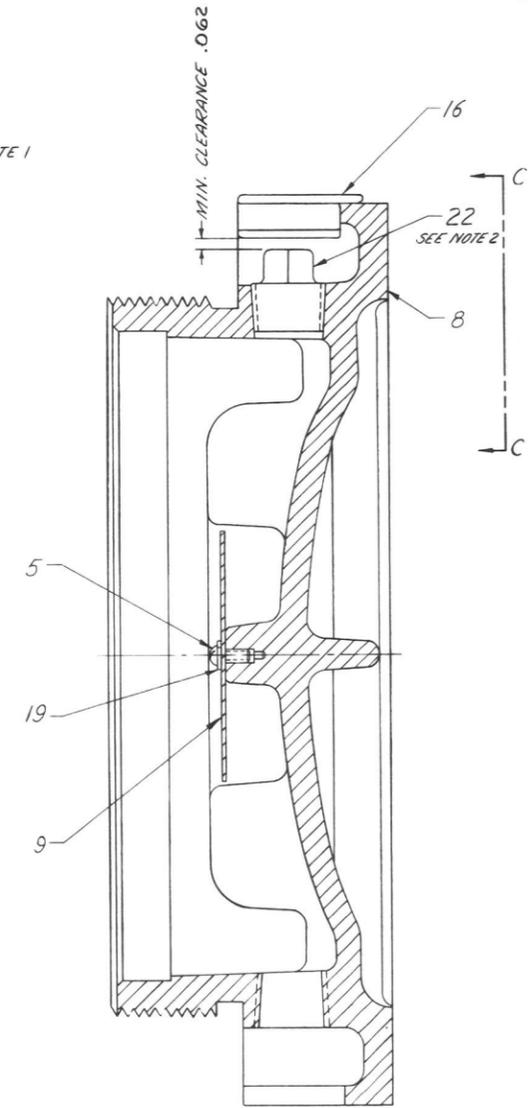
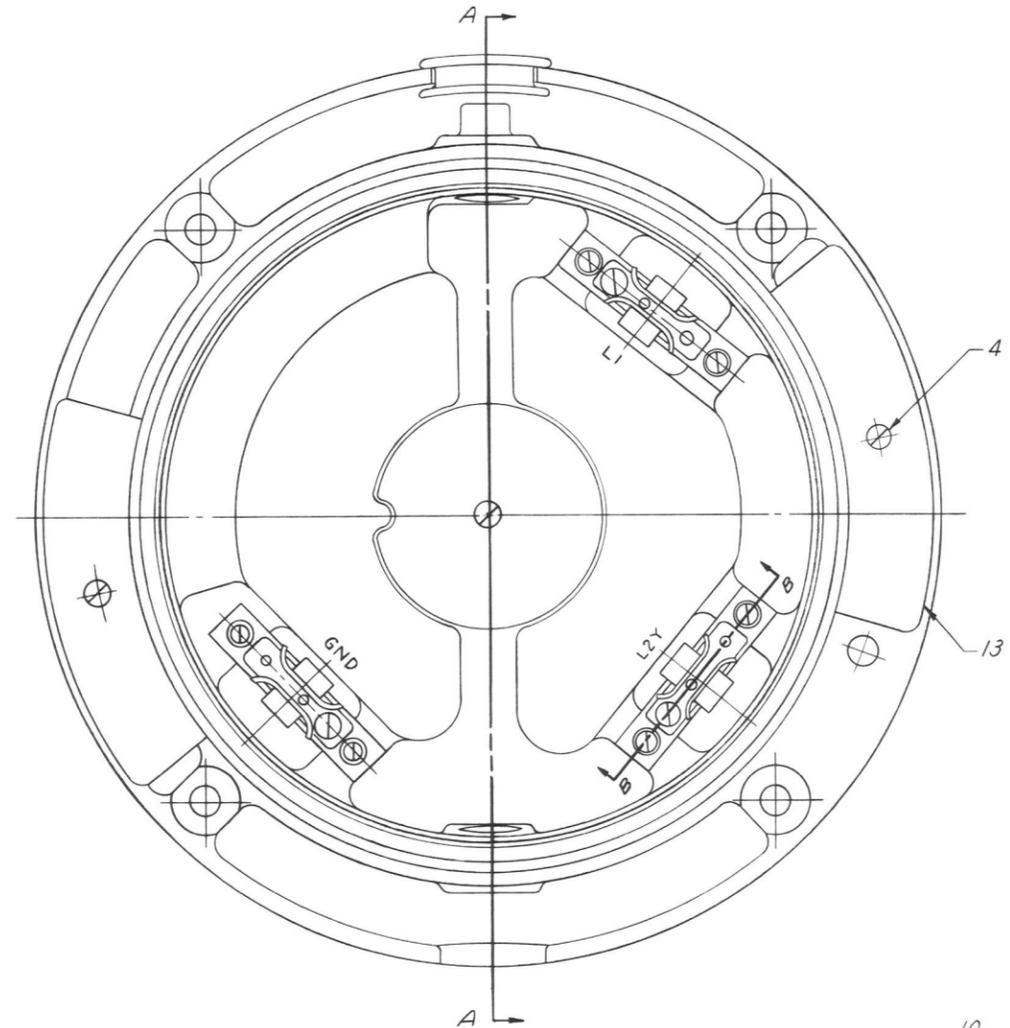


P-		
DESIGNED	WSE	CRJ
DRAWN	WSE	CRJ
ISSUE 1	0-10-57	TKM

NOTES:

1. CAST OR RUBBER STAMP THE NUMBER P-10E665 IN 3/16 CHARACTERS WITH RED LACQUER INK PER LRM 2151 OR AN APPROVED EQUIVALENT. LOCATE APPROX. AS SHOWN.
2. THERE SHALL BE A MINIMUM ENGAGEMENT OF AT LEAST 5 THREADS BETWEEN THE PIPE PLUG, ITEM 22, AND THE BASE, ITEM 8.
3. ALL TAPPED HOLES IN THE ALUMINUM CASTINGS SHALL BE LUBRICATED WITH ZINC DUST VASELINE MIXTURE. THIS MIXTURE MAY BE OBTAINED FROM ALUMINUM CO. OF AMERICA AS THEIR "ANTI-SEIZE" COMPOUND. THE COMPOUND SHALL BE CONFINED TO THE HOLES AND NOT BE ALLOWED TO SPREAD TO SURROUNDING SURFACES.

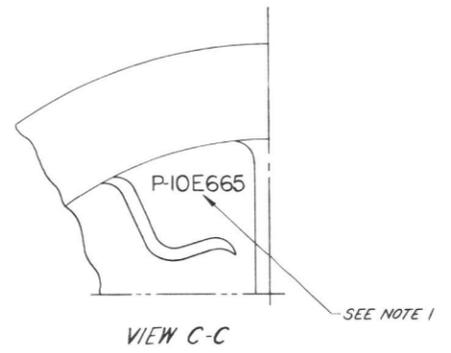

25			
24			
23			
22		PIPE PLUG, 1/2 IN GALVANIZED SOLID IRON, MAX. 1 IN. LONG	1
21			
20			
19		*1206 SHAKEPROOF LOCKWASHER	13
18			
17			
16	LP-473398	CAP	1
15	LP-473388	BLOCK	3
14			
13	LP-457636	SPRING	2
12	LP-473386	CONNECTOR	3
11	LP-473383	INSULATOR	3
10	LP-473380	CLIP	3
9	LP-473373	DISC	1
8	LP-473159	BASE	1
7			
6			
5	P-125043	SCR., RHM	1
4	P-136452	SCR., FLAT HIM	2
3	P-125049	SCR., RHM	6
2	P-124483	SCR., RHM	6
1	P-119252	SCR., RHM	3

USED ON DWG

BASE ASSEMBLY

SCALE 1/1

WESTERN ELECTRIC CO. INC.
ENGINEER OF MANUFACTURE
CENTRAL OFFICE EQUIPMENT

BELL TELEPHONE LABORATORIES, INC.

STOCK LIST

DIMENSIONS UP TO AND INCLUDING 72 INCHES EXPRESSED IN INCHES.
NON-LIMITED DIMENSIONS, OTHER THAN SIZE OF RAW MATERIAL, SHALL
BE HELD WITHIN FRACTIONAL DECIMAL

6S

LP-10E665

LP-10E665