
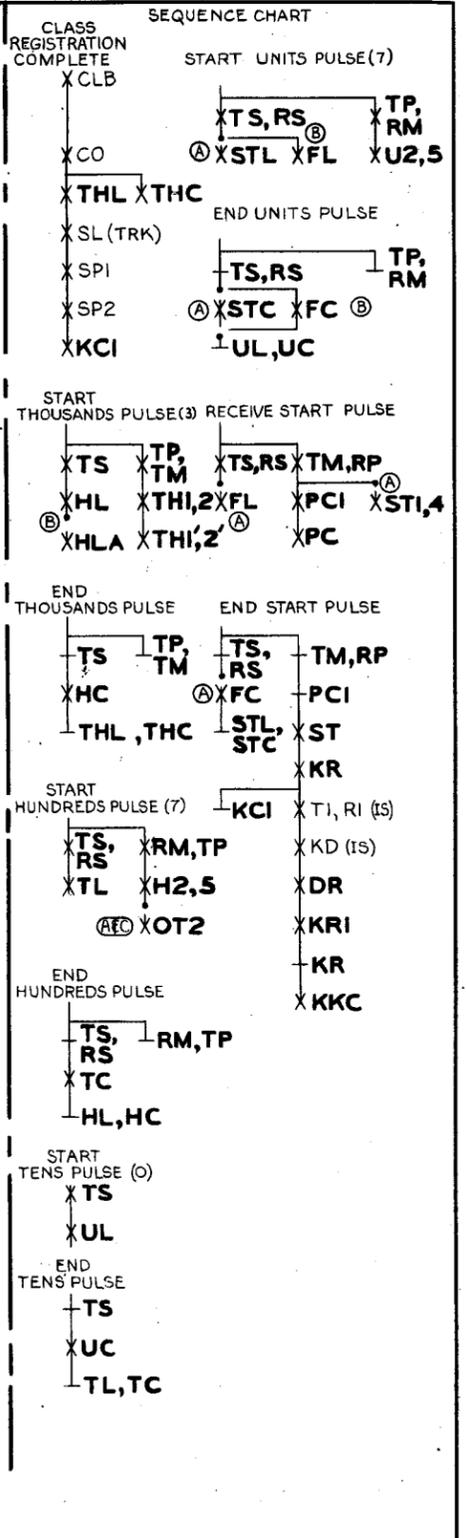


MP-11643

ISSUE 1 PART 2 REC
DATE 7-16-51 11-20-53

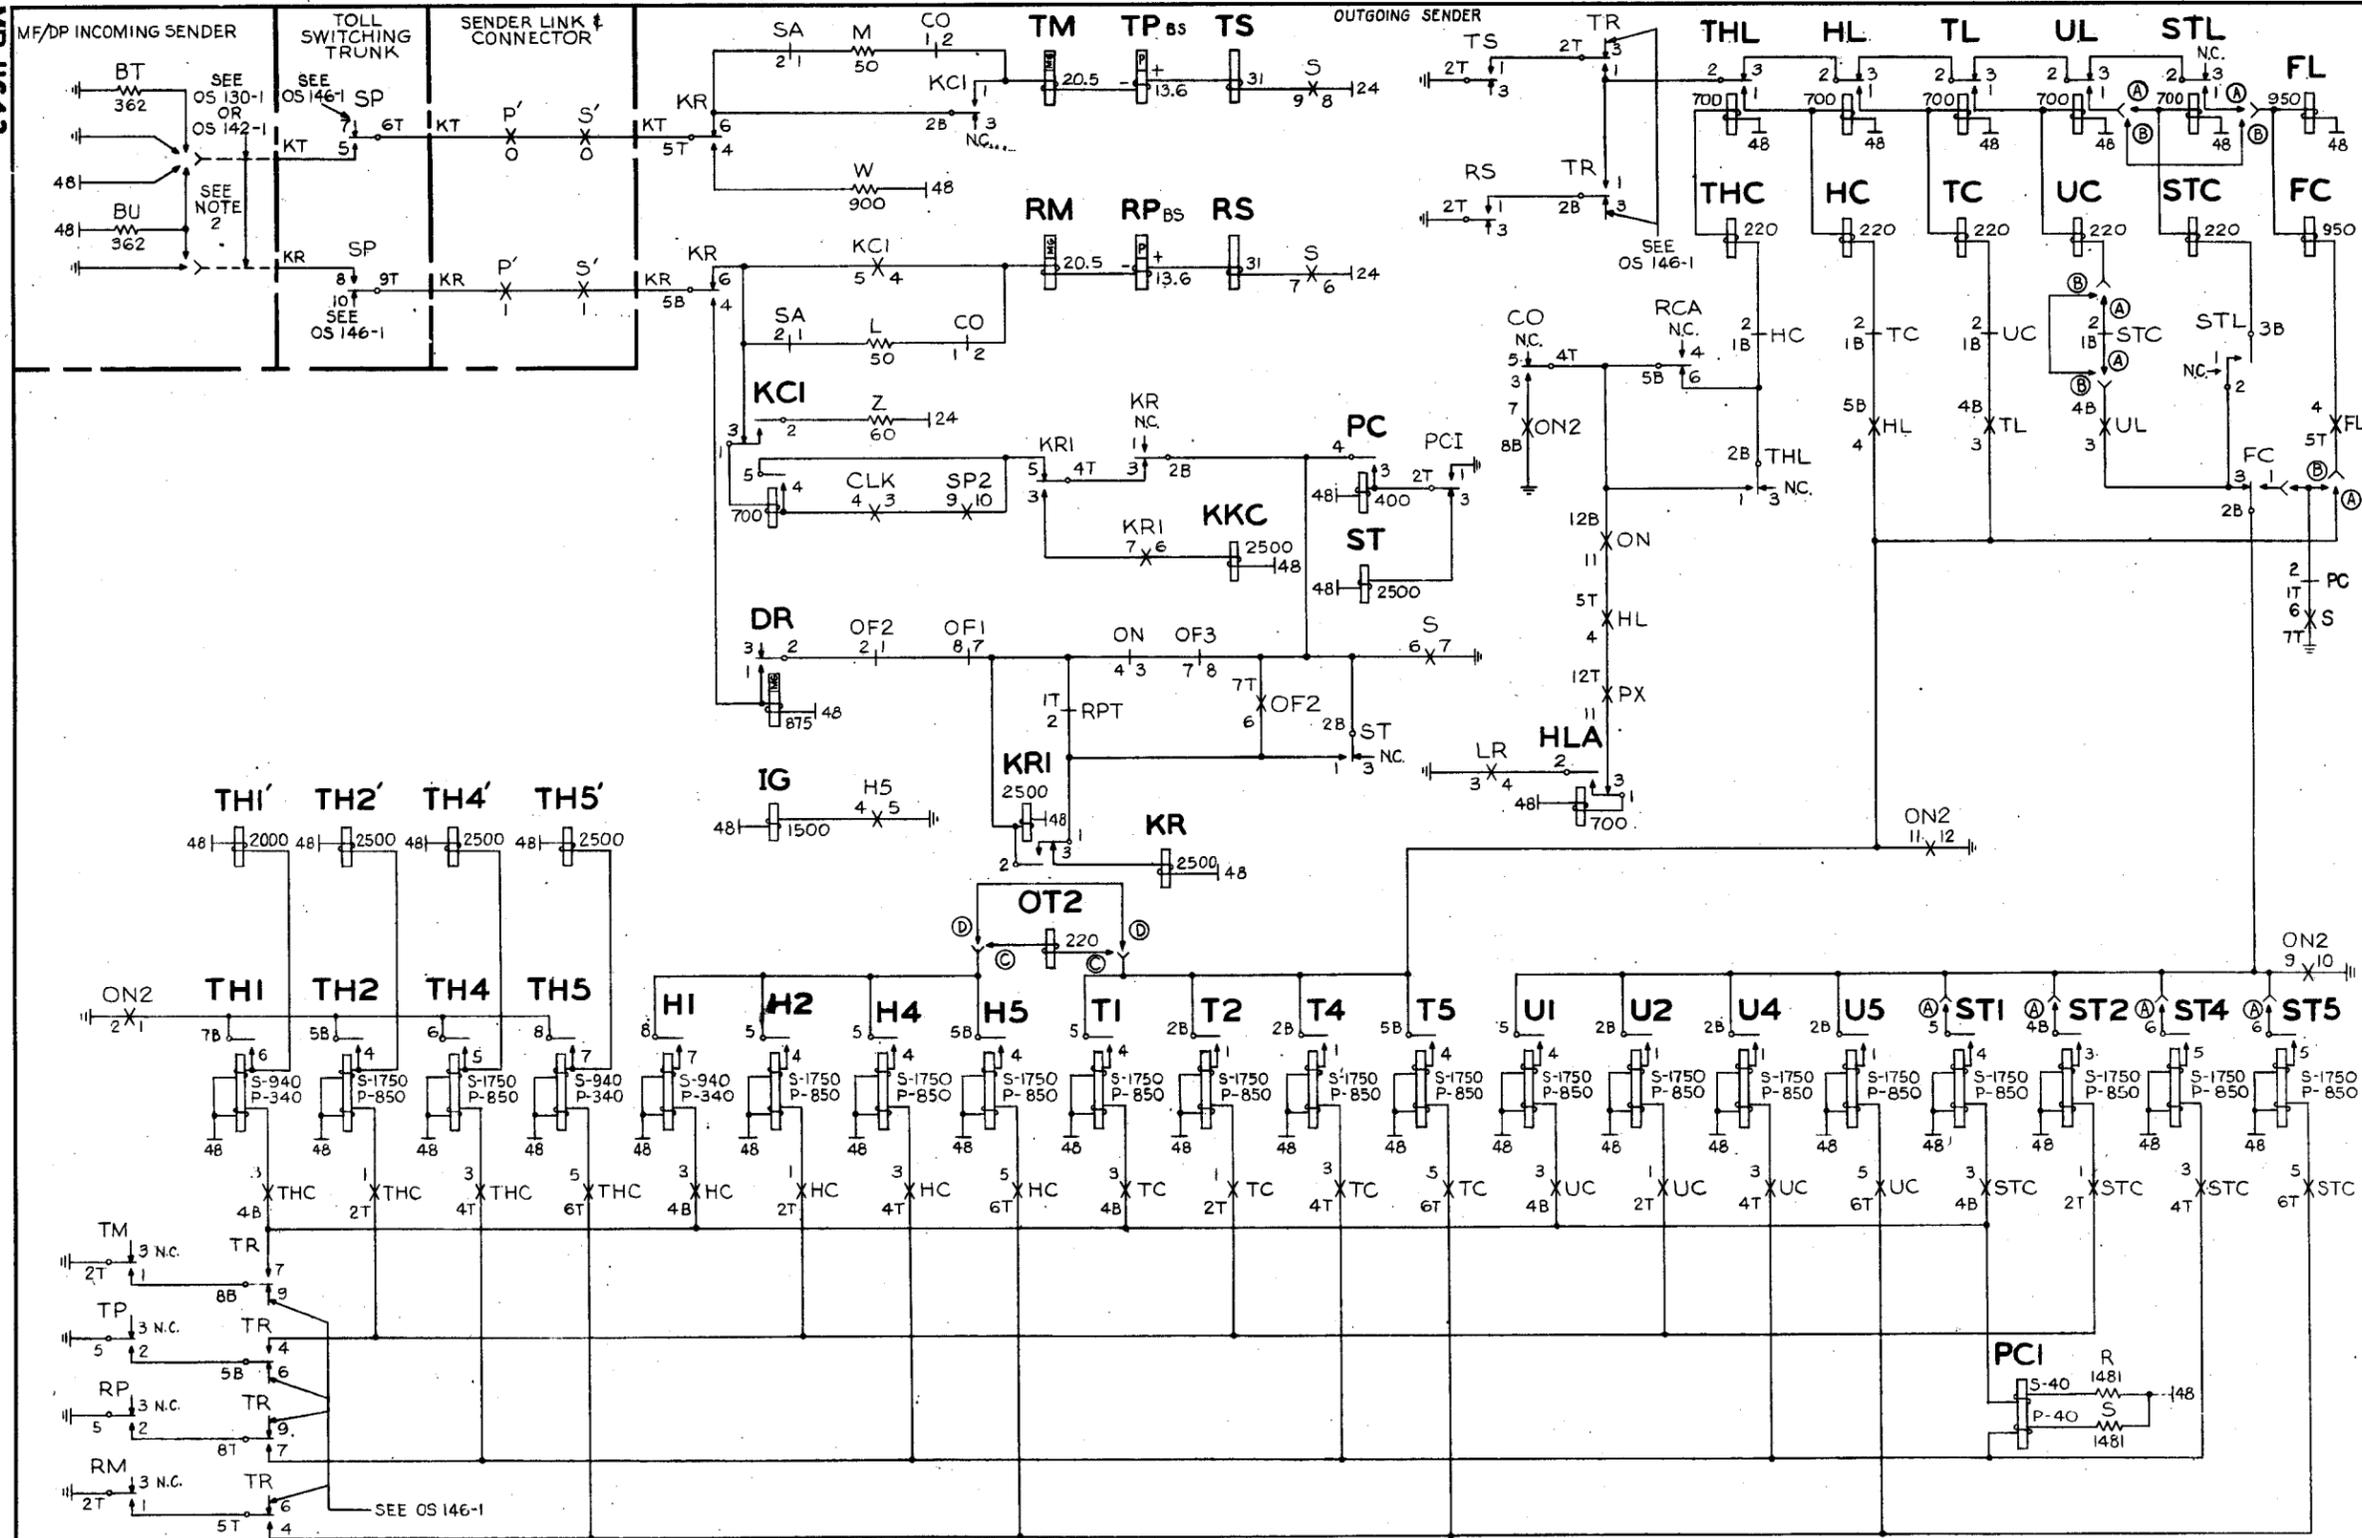

NOTES:

OS OPTION	FEATURE OR OPTION	SD OPTION	SD
A	FOR MANUAL OFFICES RE-QUIRING PCI PULSING.	ZQ ZL	68018-01
B	FOR OFFICES NOT REQUIR-ING PCI PULSING.	LOOP WIRING & ZM	68018-01
C	FOR PCI OFFICES WITH MORE THAN 10,000 NUMBERS.	H	68018-01
D	FOR PCI OFFICES WITH LESS THAN 10,000 NUMBERS.	LOOP WIRING	63018-01

REGISTRATION OF DIGITS

DIGIT	PULSES RECEIVED KT LEAD/KR LEAD	PULSING RELAYS TS RS TP RP TM RM	REGISTER RELAYS
0	362Ω GRD	X	NONE
1	0Ω GRD	X	1
2	362Ω BAT.	X X	2
3	0Ω BAT	X X X	1,2
4	362Ω GRD/362Ω BAT.	X X X	4
5	362Ω GRD/0Ω GRD.	X X X	5
6	0Ω GRD/0Ω GRD.	X X X X	1,5
7	362Ω BAT/0Ω GRD.	X X X	2,5
8	0Ω BAT/0Ω GRD.	X X X X	1,2,5
9	362Ω GRD/0Ω BAT.	X X X X	4,5
START	0Ω GRD/362Ω BAT.	X X X X	1,4

X DENOTES RELAY OPERATED.

INCOMING SENDER CKT. DP SD-68221-01, ISS.17
 * OUTGOING SDR. CKT. SD-68018-01, ISS.28
 SDR LINK & CONN. CKT. SD-68334-01, ISS.14
 TOLL SWITCHING TRK. CKT. SD-68326-01, ISS.10

**OUTGOING SENDER
REGISTRATION**

NO. 4A OR 4M TOLL

OS 147-I