
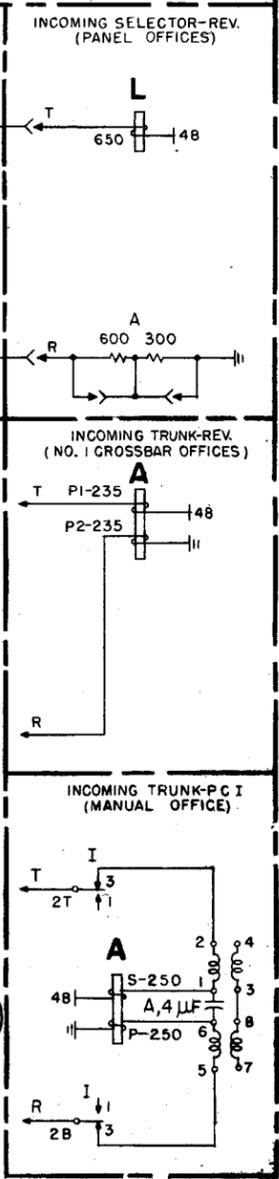


|      |          |          |   |   |   |
|------|----------|----------|---|---|---|
| DATE | 1        | 2        | 3 | 4 | 5 |
|      | 10/29/51 | 12-18-53 |   |   |   |

SEQUENCE CHART

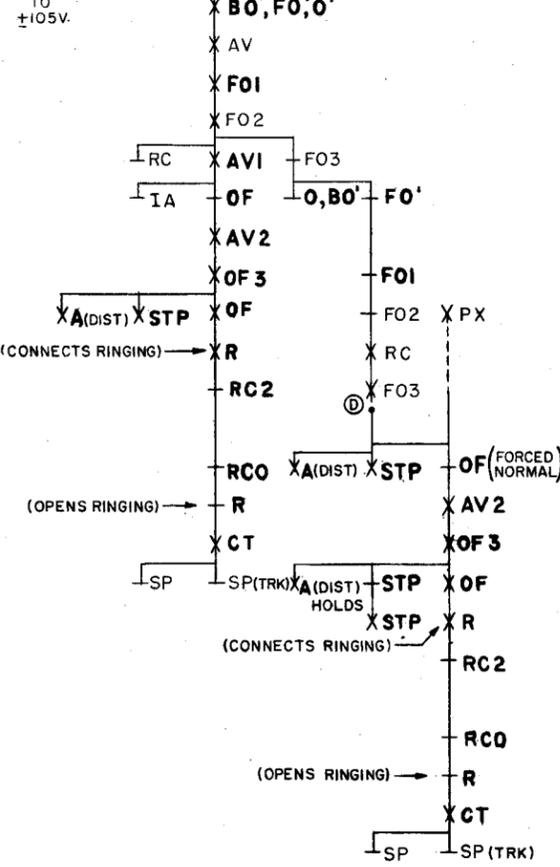

- INCOMING SELECTOR CKT.-REV. SD-2115-01, ISS.25
- INCOMING TRUNK CKT.-PCI SD-12900-01, ISS.22
- INCOMING TRUNK CKT.-REV. SD-25302-01, ISS.23
- OUTGOING SENDER CKT. SD-68018-01, ISS.28
- SENDER LINK & CONNECTOR CKT. SD-68334-01, ISS.14
- TOLL SWITCHING TRUNK CKT.-REV/PCI SD-68326-01, ISS.10

**OUTGOING SENDER TRUNK CLOSURE AND CONTROLLED RINGING**

NO. 4A OR 4M TOLL

OS 152-1

NOTES:  
1, NC NEXT TO CONTACT MEANS NO CONNECTION ON THAT CONTACT.

| OS OPTION | FEATURE  | SD OPTION   | SD              |
|-----------|--|---|-----------------|
| A         | WHEN CHAIN CKT. AND (CTR) KEY METHOD FOR HOLDING STUCK SENDERS IS PROVIDED                             | FIG. A  | 68018-01        |
| B         | WHEN COMMON KEY METHOD FOR HOLDING STUCK SENDERS IS PROVIDED   | FOR THE MODIFICATION OF OFFICES TO COMMON KEY METHOD. | FIG. B 68018-01 |
| C         | FOR ADDITIONS TO OFFICES THAT HAVE BEEN MODIFIED AND FOR OFFICES WHERE FIG. A HAS NEVER BEEN INSTALLED | FIG. C  | 68018-01        |
| D         | TO FORCE THE (OF) RELAY NORMAL IF IT FAILS TO RELEASE ON OPEN CIRCUIT (REVERTIVE ONLY)                 | YH  | 68018-01        |