
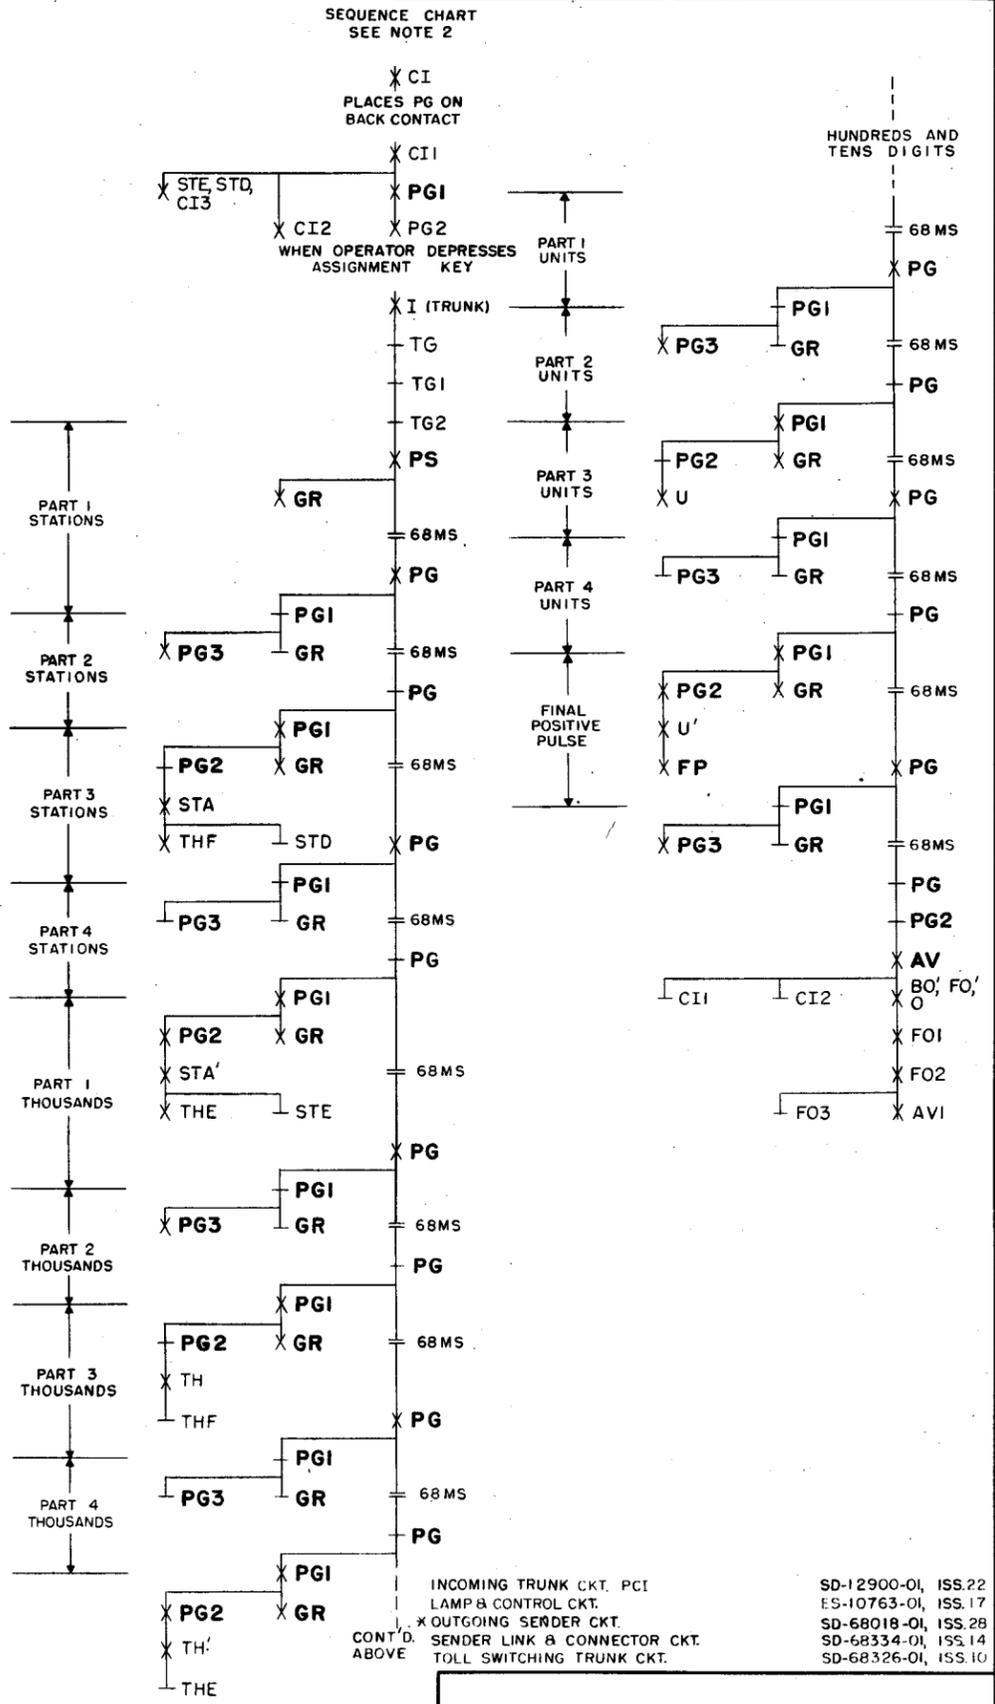


OUTGOING SENDER

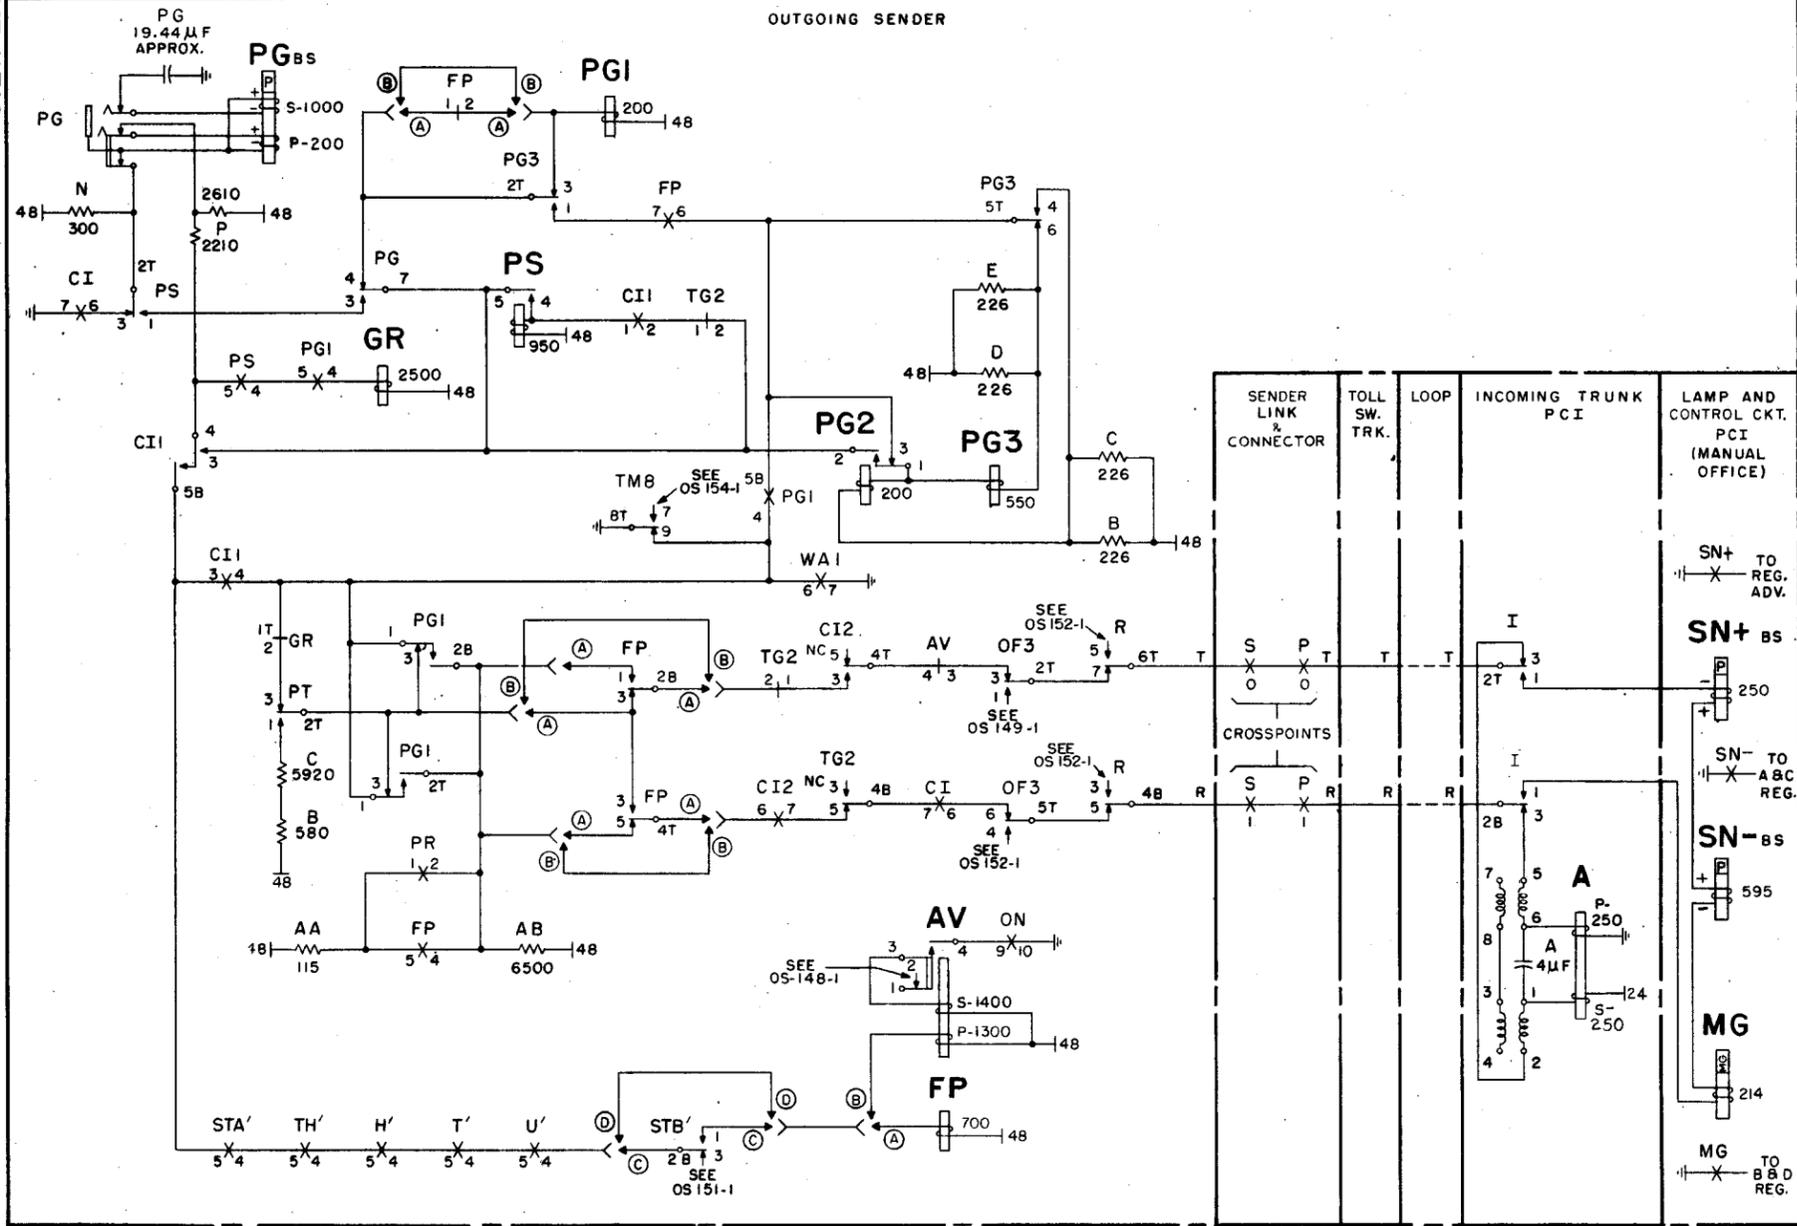

REVISION	1	2	3
DATE	10-22-51	11-23-53	

NOTES:

OS OPTION	FEATURE OR OPTION	SD OPTION	SD
A	HEAVY FINAL PULSE REQ.	X	68018-01
B	FEATURE ABOVE NOT REQ.	LOOPEWIRING & T	
C	PROVIDED WHEN OFFICE* HAS OVER 10,000 LINES	Y	
D	WHEN ABOVE FEATURE IS NOT PROVIDED	LOOPEWIRING	

2. SEQUENCE CHART SHOWS OUTPULSING FOR NUMBERS LESS THAN 10,000 AND REQUIRING A FINAL PULSE.

PULSE	PULSE CONTROL RELAYS		
	PG1	PG2	PG3
1	X	X	
2		X	X
3	X		X
4			X

X DENOTES RELAY OPERATED

PCI PULSES

DIGIT	HUNDREDS TENS UNITS	THOUSANDS	STATIONS
0	- n - n - n - n - n - n - n - n - n		
1	P n - n - n - n - n - N P n - n - n		
2	- N - n - n P n - n - n - n - n - n - n		
3	P N - n - n P n - n - N - n - n - n - n		
4	- n - n P n - n - N - n - n - n - n - n		
5J	- n - n - N - n - n - n - n - n - n P n		
6M	P n - n - N P N - n - n - n - n - n - n		
7R	- N - n - N P N - n - n - n P N - n - n		
8	P N - n - N - n - n P n - n - n - n - n		
9W	- n - n P N - n - n P N - n - n - n - n		

LEGEND:  
 - DENOTES BLANK PULSE  
 n DENOTES LIGHT NEGATIVE PULSE  
 N DENOTES HEAVY NEGATIVE PULSE  
 P DENOTES LIGHT POSITIVE PULSE

5. NC NEXT TO CONTACT MEANS NO CONNECTION ON THAT CONTACT.

OUTGOING SENDER PCI PULSE GENERATION