

FIG. 3 RECEIVING 'TKS' SIGNAL, RESTORING 3 OR 6D CARD, RELEASING CARD TRANSLATOR, DECODER, & MARKER CONNECTOR.

NOTES:

SC OPTION	FEATURE OR OPTION	SD OPTION	SD
C	SEPARATE TRAIN OFFICE	FIG. A	68340-01
D	COMBINED TRAIN OFFICE	FIG. B	68340-01
F	FOR OFFICES HAVING MORE THAN 6 TRUNK BLOCK CONNECTORS	X OR Y	68395-01
H	PCR INDICATED BY OPERATION OF RI1/RI2/RI4 FROM FIRST 3D CARD	NONE	
K	NPCR INDICATED BY OPERATION OF RI7 & RIO FROM FIRST 3D CARD	NONE	
M	PRETRANSLATION WAS MADE DURING CALL	NONE	
N	NO PRETRANSLATION WAS MADE DURING CALL	NONE	
P	CR ROUTING INSTRUCTIONS ON 3D CARD	NONE	
Q	CR ROUTING INSTRUCTIONS ON 6D CARD (H. TRANS.)	NONE	
R	CR ROUTING INSTRUCTIONS ON 6D CARD (DFT)	NONE	
S	CR ROUTING INSTRUCTIONS ON 6D CARD (FT)	NONE	
T	SEPARATE TRAIN COMBINED OPERATION OFFICE	FIG. E	68340-01

2. FIG. 4 IS CONTINUED ON FIG. 5, SC119-1, V301 WHICH IS SEQUENCE FOR READING 'AR' CARD AND RELEASING OF THE HOME TRANS, DECODER, AND MARKER CONNECTOR.
 THE SAME SEQUENCE OF OPERATION IS USED FOR CARD-TO-RELAY ROUTING INSTRUCTION EXCEPT THAT CRA AND CRP RELEASE AND NOT RRA AND RRP.

3. THESE RELAYS RELEASE HERE IF OPERATED BY SENDER OR DECODER CONNECTOR AT SEIZURE.

- CARD TRANSLATOR CKT. SD-68342-01, ISS. 6
- DECODER CONNECTOR CKT. SD-68339-01, ISS. 4
- *DECODER CKT. SD-68340-01, ISS. 8
- INCOMING SENDER CKT. - DP-4A SD-68221-01, ISS. 14
- INCOMING SENDER CKT. - MF-4A SD-68222-01, ISS. 16
- MARKER CONNECTOR CKT. SD-68395-01, ISS. 5
- MARKER CKT. SD-68388-01, ISS. 7
- TRANSLATOR CONNECTOR CKT. SD-68341-01, ISS. 6
- INCOMING SENDER CKT. - DP-4M SD-68423-01, ISS. 2
- INCOMING SENDER CKT. - MF-4M SD-68424-01, ISS. 4

DECODER
 OVERALL OPERATIONS FOR A CALL
 USING CARD-TO-RELAY ROUTING
 INSTRUCTION

NO. 4A OR 4M TOLL


3 SHEETS, SHEET 2

SC118-1

ORDER AS BSP ITEM MP-11751

MP-11751
 3 SHEETS, SHEET 2

ISSUE	DATE	BY	REASON
1	12-17-51
2	10-19-53

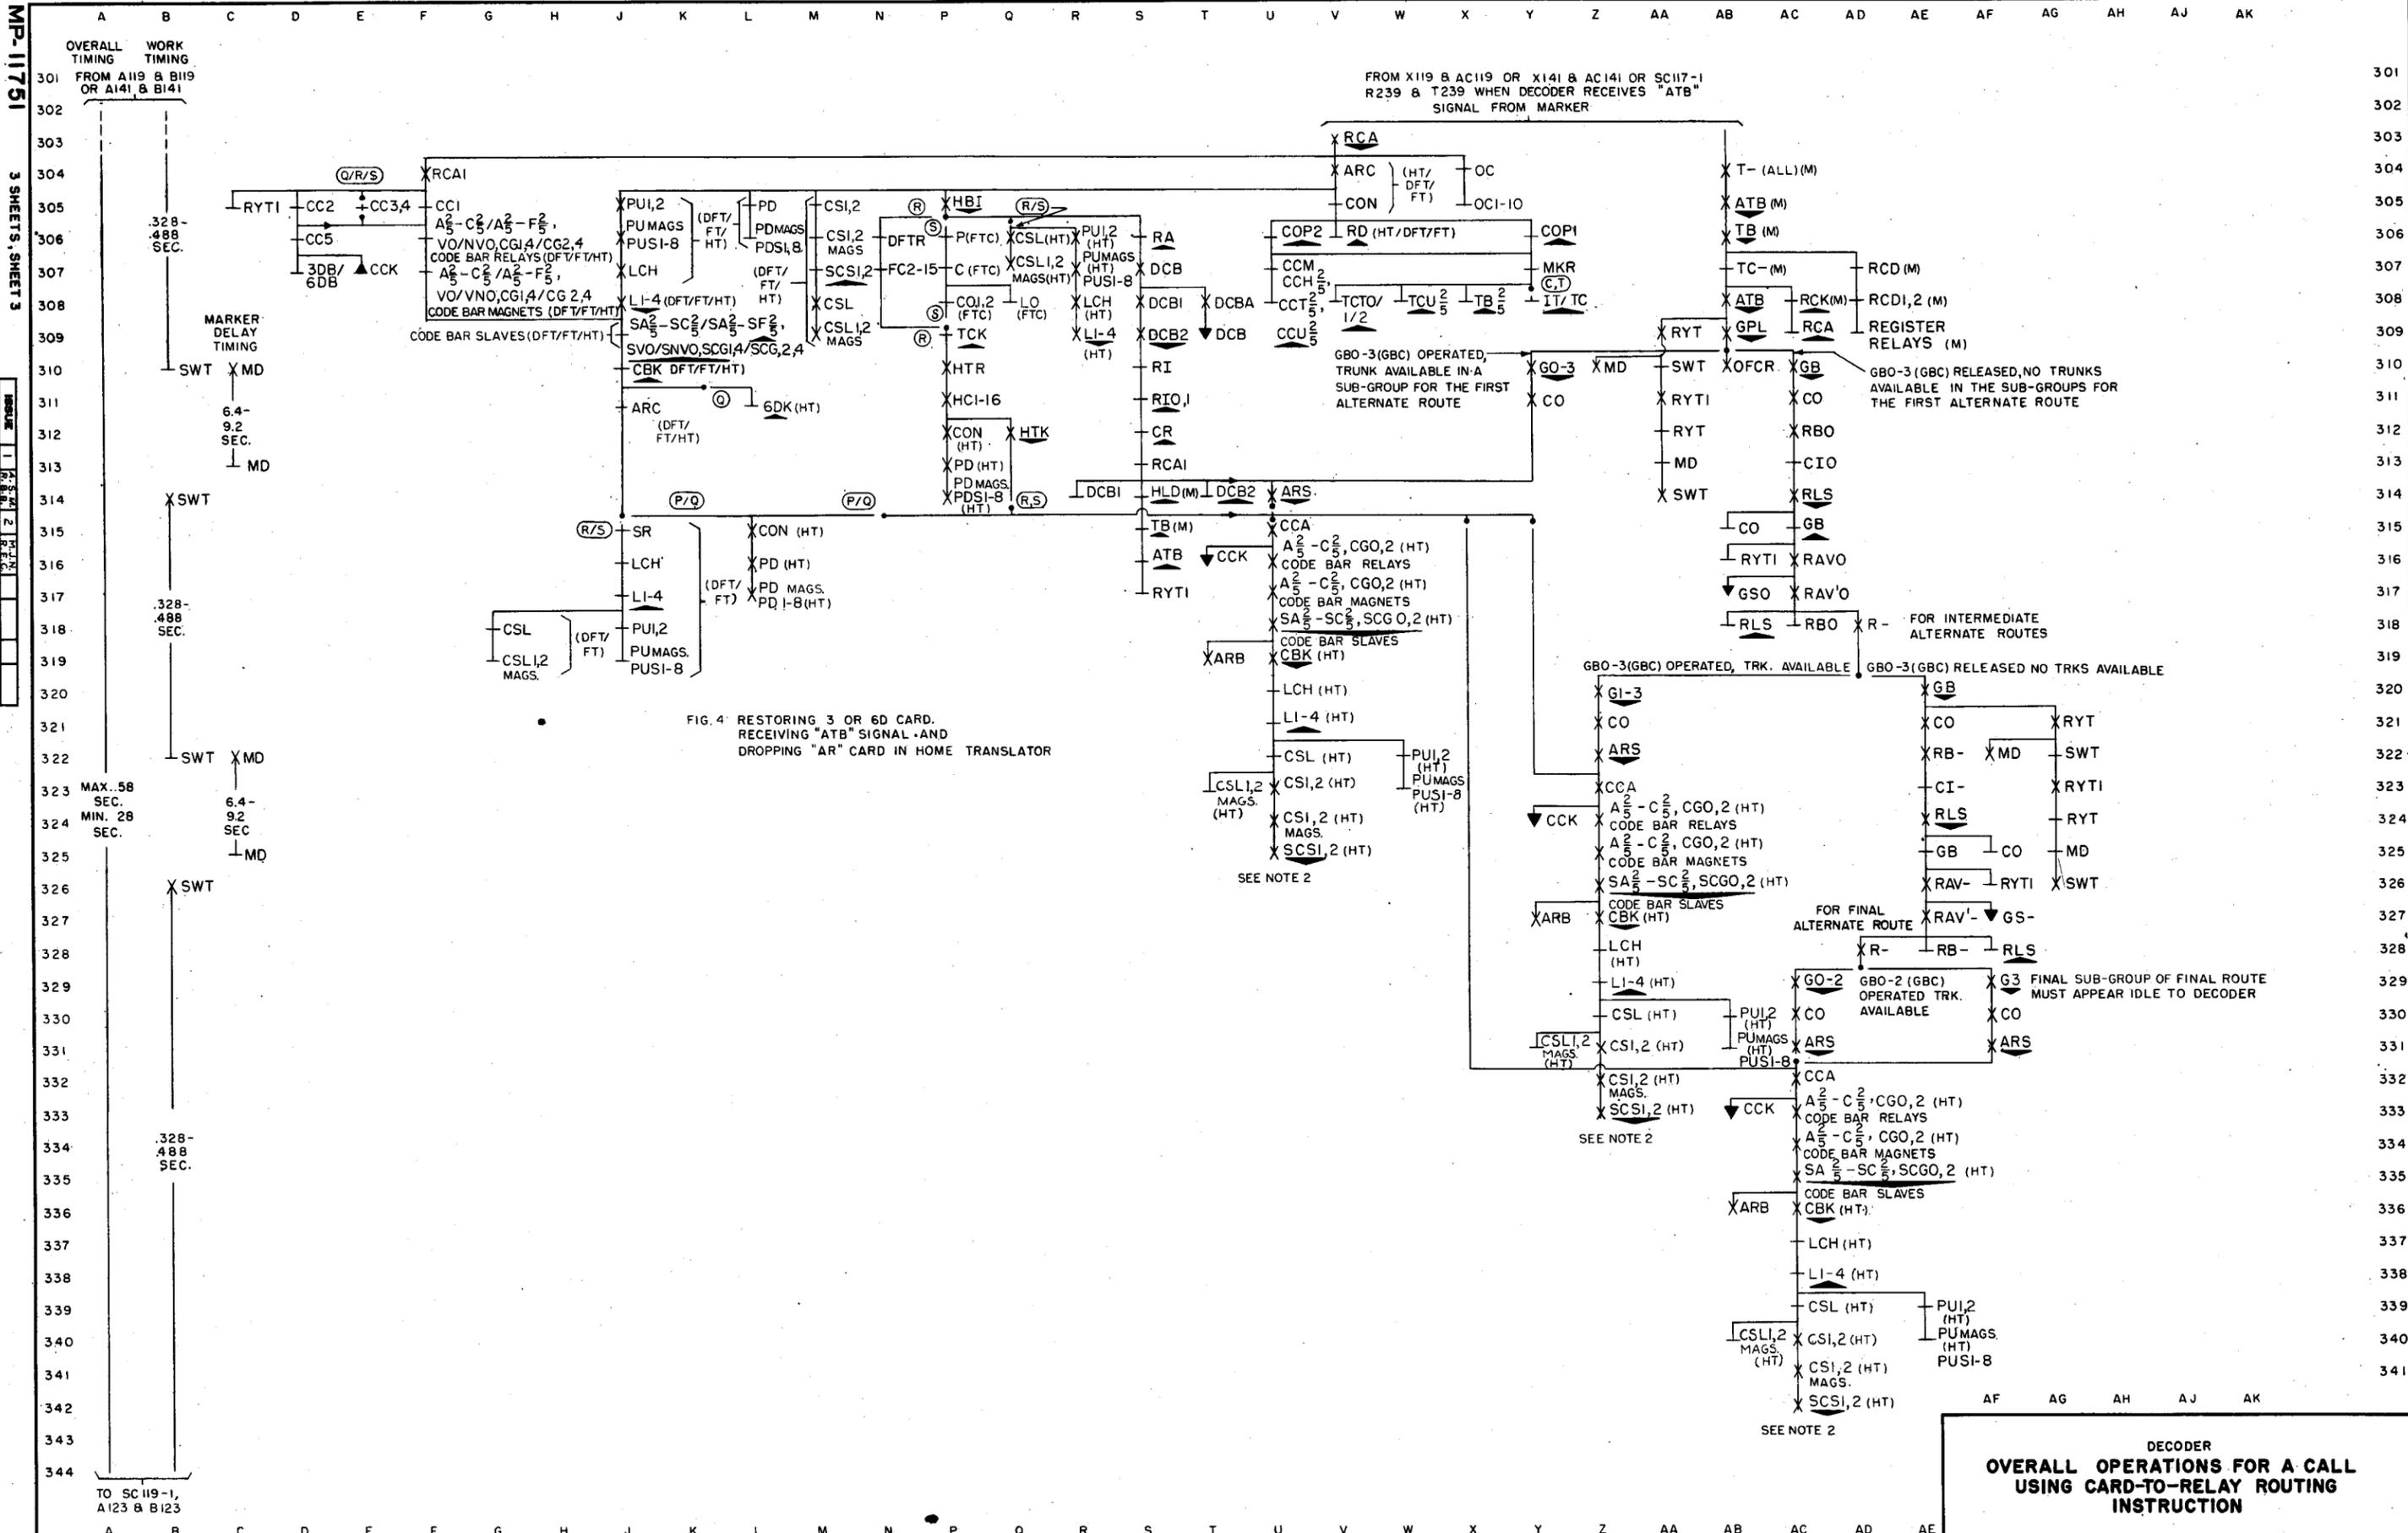

MP-11751
3 SHEETS, SHEET 3

REVISION	DATE	BY	CHKD
1	12-7-51		
2	10-18-53		

FIG. 4 RESTORING 3 OR 6D CARD. RECEIVING "ATB" SIGNAL AND DROPPING "AR" CARD IN HOME TRANSLATOR

DECODER
OVERALL OPERATIONS FOR A CALL
USING CARD-TO-RELAY ROUTING
INSTRUCTION