
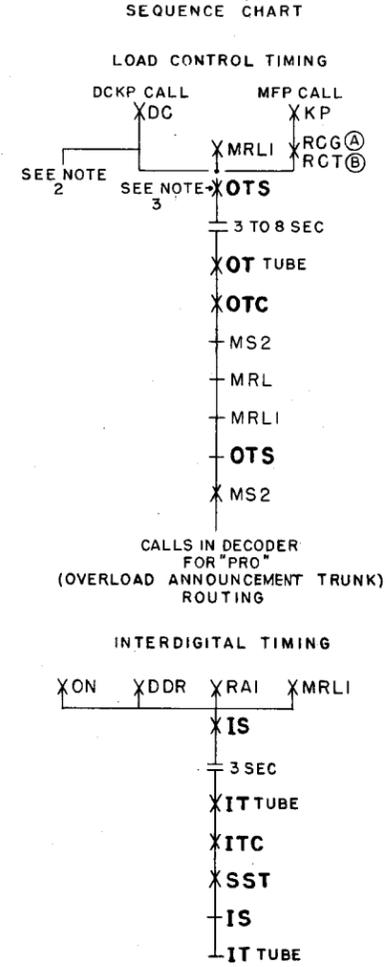


ISSUE	1	2	3	4
DATE	9-1-53			

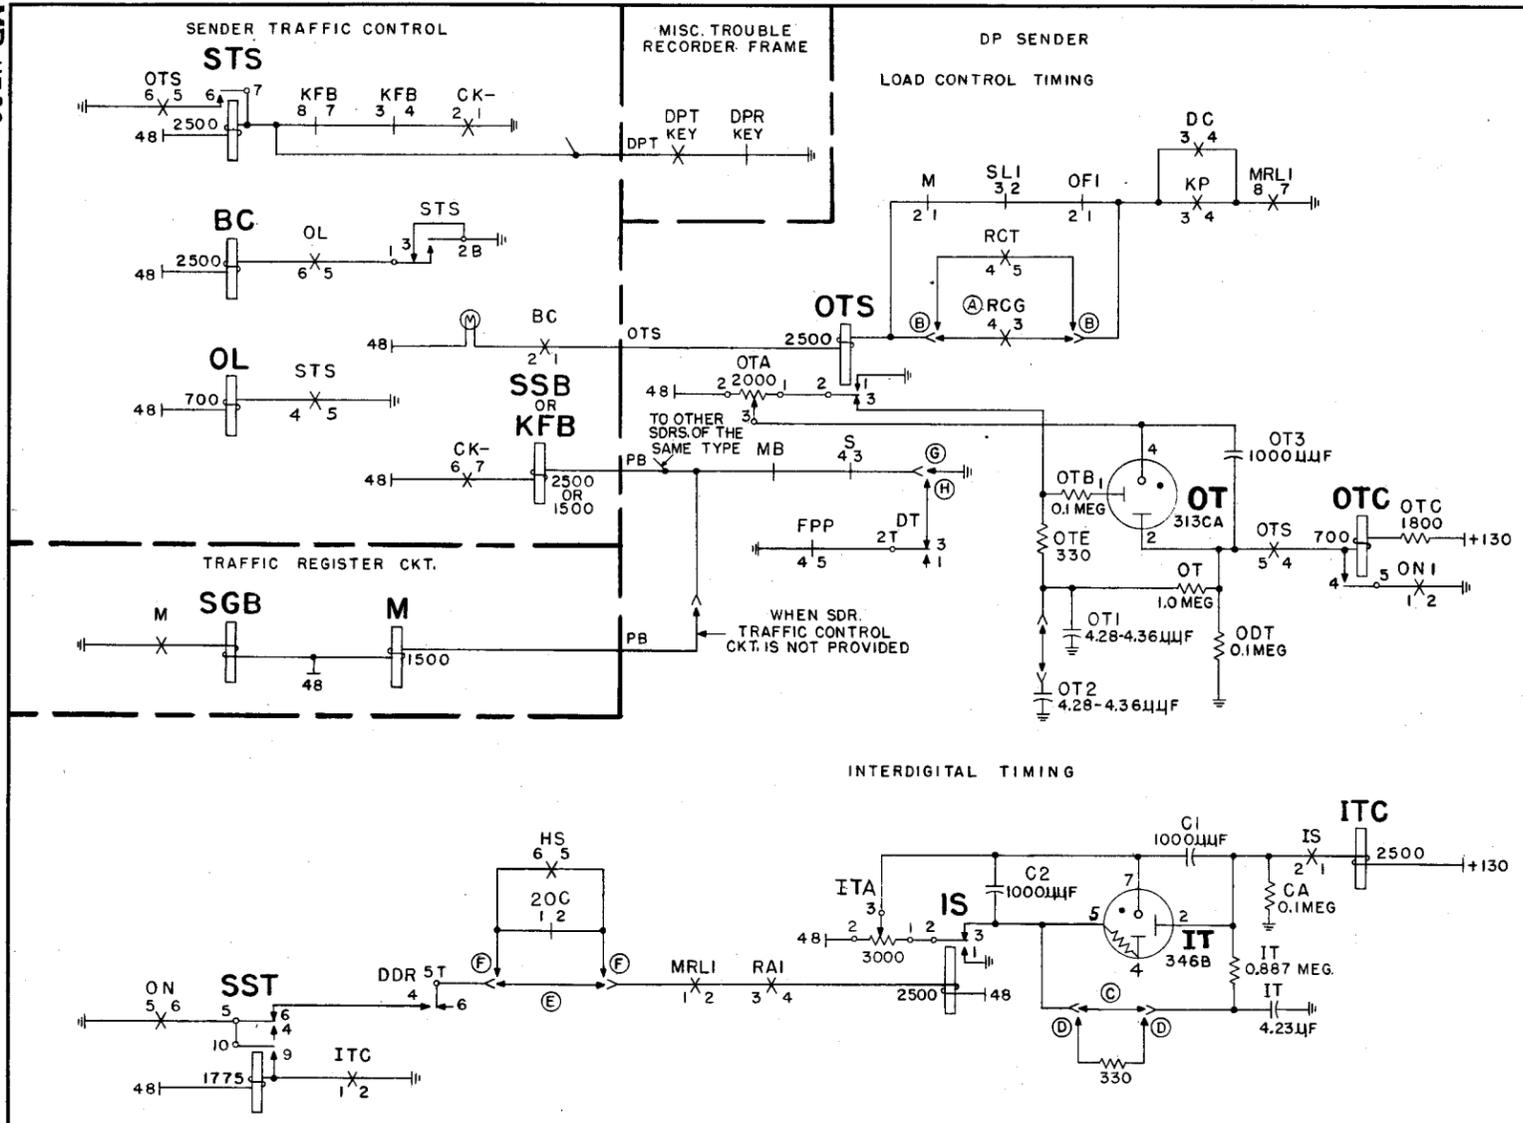

NOTES:

- | OS OPTION | FEATURE OR OPTION | SD OPTION | SD |
|-----------|---|-----------|----------|
| A | FIG. 4 PROVIDED | | |
| B | FIG. 22 PROVIDED | | |
| C | M.D. | YU | |
| D | STD. | YV | |
| E | LPD-20C CALLS DO NOT REQUIRE 7 DIGITS REGISTERED IN THE SENDER. | FIG. N | 68221-01 |
| F | LPD-20C CALLS REQUIRE 7 DIGITS REGISTERED IN THE SENDER. | FIG. O | |
| G | LOAD CONTROL TIMING NOT PROVIDED | FIG. L | |
| H | LOAD CONTROL TIMING PROVIDED | FIG. M | |
- THE LACK OF OUTGOING SENDER PREVENTS THE OPERATION OF SENDER (SL) & (SLI) RELAYS.
- BATTERY CONNECTED TO (OTS) WINDING FROM SDR. TRAFFIC CONTROL CKT. WHEN A SHORTAGE OF SENDERS EXISTS IN A KEY FRAME GROUP.