



SAM21 Shelf Controller Configuration Management

Configuration management strategy

Initial configuration of the SAM21 Shelf Controllers (SC) is completed by Nortel Networks personnel. Reconfiguration is available when a Shelf Controller is replaced.

Tools and utilities

The primary user interface for the Shelf Controllers is the CS 2000 SAM21 Manager.

Note: If a Card View window is opened and a task or maintenance is completed, close the window rather than minimize the window. Memory consumption is kept to a minimum, but several unused and open Card View windows can consume memory on the CS 2000 SAM21 Manager client workstation.

Configuration management procedures

The following procedures are available from SAM21 Shelf Controllers.

Procedure	Page
Deprovision a SAM21 shelf	3
Adding ATM connection sets	5
Deleting ATM connection sets	9
Reconfiguring ATM connection sets	10
Reconfiguring ATM PMC addresses	11
Editing a SAM21 network element	13
Re-provision a shelf controller MAC address	14

Procedure	Page
Reconfigure NTP service	15
Provision an unconfigured shelf	19

Unavailable procedures

The following procedures are not available for the SAM21 Shelf Controllers.

Deprovisioning a shelf controller card

The SAM21 does not support complete deprovisioning of a Shelf Controller card since the SAM21 network element requires two Shelf Controllers. A Shelf Controller can be reprovisioned or replaced.

Reprovisioning a shelf controller card

Once the initial configuration of a shelf is complete, the IP addresses of the Shelf Controllers cannot be changed. When Shelf Controllers are replaced, the MAC address of the replacement Shelf Controller is reprovisioned, but the replacement Shelf Controller assumes the IP address of the replaced Shelf Controller. Reprovisioning a Shelf Controller is possible if the shelf is powered off. Contact Nortel Networks support personnel for assistance.

Deprovision a SAM21 shelf




CAUTION

Service interruption

Gateway Controllers and other non-system slot cards will power down with the shelf. Perform this procedure at the direction of Nortel Networks support personnel.

The CS 2000 SAM21 Manager client does not allow deprovisioning a shelf that provides service. To disable the shelf, power the shelf down or isolate the Shelf Controller (SC) cards by removing the Ethernet links from the Shelf Controller faceplates. A shelf in this state has one critical loss of communication alarm.

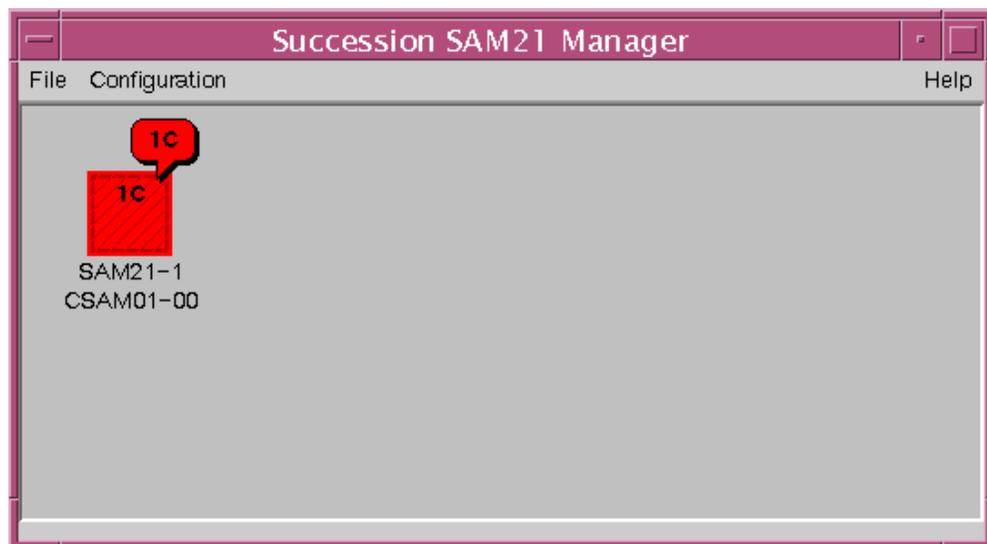


At the CS 2000 SAM21 Manager client

- 1 Double click the shelf icon to verify that communication with the SAM21 Shelf Controllers is unavailable.



2 Deprovision the SAM21 shelf.

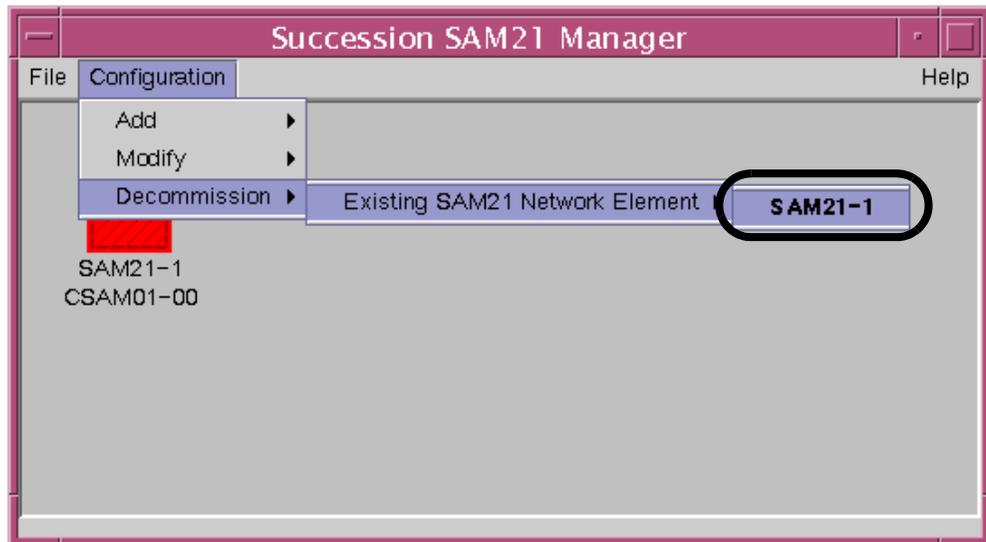


3 This procedure is complete.


Adding ATM connection sets

At the CS 2000 SAM21 Manager client workstation

- 1 From the Shelf View, select Configuration and then IPoA Services from the menu bar to open the ATM Connections window.

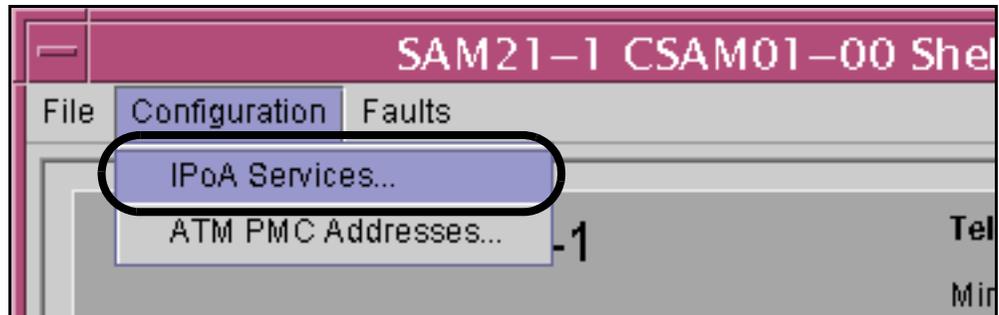

- 2 From the ATM Connections window, select Edit and then Add Connection Set from the menu bar to open the Add Connection Set window.

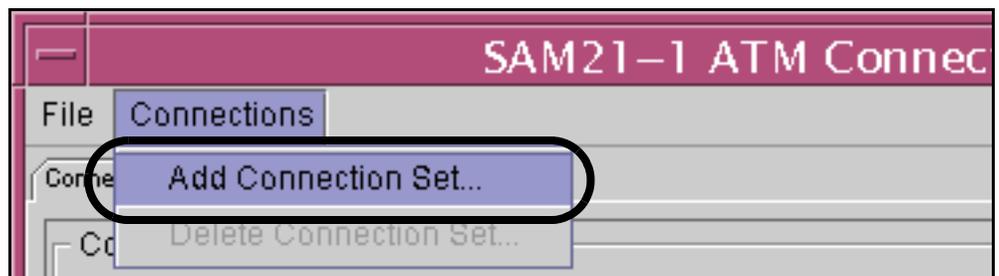

- 3 Enter data for the ATM connection set and click the OK button.

Connection Set Parameters

Connection Set Name: CO10 OAMP

End Node IP: 47.142.85.10

End Node Subnet IP: 192.1.10.198

End Node Subnet Mask: 255.255.255.255

OK Cancel Details...

Note: The connection set appears in the ATM Connections window.

File Connections

Connections Carriers / ATM Interface

Connection Sets

CS Name	CS ID	EndNode IP	EndNode Subnet IP	EndNode Mask	State
CO10 OAMP	12	47.142.85.10	192.1.10.198	255.255.255.255	Green
CO10 Call Co...	26	47.142.85.110	192.1.10.0	255.255.255.192	Green
CO11 OAMP	15	47.142.85.11	192.1.11.198	255.255.255.255	White
CO11 Call Co...	27	47.142.85.111	192.1.11.0	255.255.255.192	White
CO12 OAMP	16	47.142.85.12	192.1.12.198	255.255.255.255	White
CO12 Call Co...	28	47.142.85.112	192.1.12.0	255.255.255.192	White
CO13 OAMP	19	47.142.85.13	192.1.13.198	255.255.255.255	Red
CO13 Call Co...	31	47.142.85.113	192.1.13.0	255.255.255.192	White
CO14 OAMP	20	47.142.85.14	192.1.14.198	255.255.255.255	Green
CO14 Call Co...	33	47.142.85.114	192.1.14.0	255.255.255.192	Green
CO15 OAMP	21	47.142.85.15	192.1.15.198	255.255.255.255	White

Connection Members

	ATMCard 0	ATMCard 1
Activity	INACTIVE	ACTIVE

- 4 This procedure is complete.

Additional information

Nortel Networks anticipates that each far end node will require two ATM connections. One connection is for call control signalling and the other connection is for OAM&P. Using two connections enables more efficient use of bandwidth.

The following table provides information about the required values.

Note: Refer to the office address engineering guidelines for specific values.

Field	Value	Meaning
Connection Set Name	string	<p>Nortel Networks recommends the practice of identifying the far end node and the connection set type in the name.</p> <p>For example:</p> <ul style="list-style-type: none">• CO10OAMP indicates that the far end node is in the central office, the ATM interface has an IP address that ends in 10, and is an OAM&P connection.• PL2CallControl indicates that the far end node is located at PL, the ATM interface has an IP address that ends in 2, and is a call control signalling connection.
End Node IP	IP address	<p>This is the IP address of the ATM interface on the far end node. If the far end node offers two interfaces, use one IP address for OAM&P and the other address for call control.</p>

Field	Value	Meaning
End Node Subnet IP	IP address	<p>The OAM&P connection requires the IP address to which the Shelf Controller will offer maintenance messaging and software download. When provisioning the far end node, use this address to provision the floating IP address.</p> <p>The call control connection requires the network IP address. Network IP addresses end in zero. For example, 192.1.10.0.</p>
End Node Subnet Mask	IP address	<p>The OAM&P connection requires an IP address of 255.255.255.255.</p> <p>The call control connection requires an IP address of 255.255.255.nnn. The last value must be less than the last value specified for the End Node Subnet IP. For example, 255.255.255.192.</p>


Deleting ATM connection sets

ATTENTION


Perform this procedure at the direction of Nortel Networks support personnel.

At the CS 2000 SAM21 Manager client workstation

- 1 From the Shelf View, select Configuration and then IPoA Services from the menu bar to open the ATM Connections window.

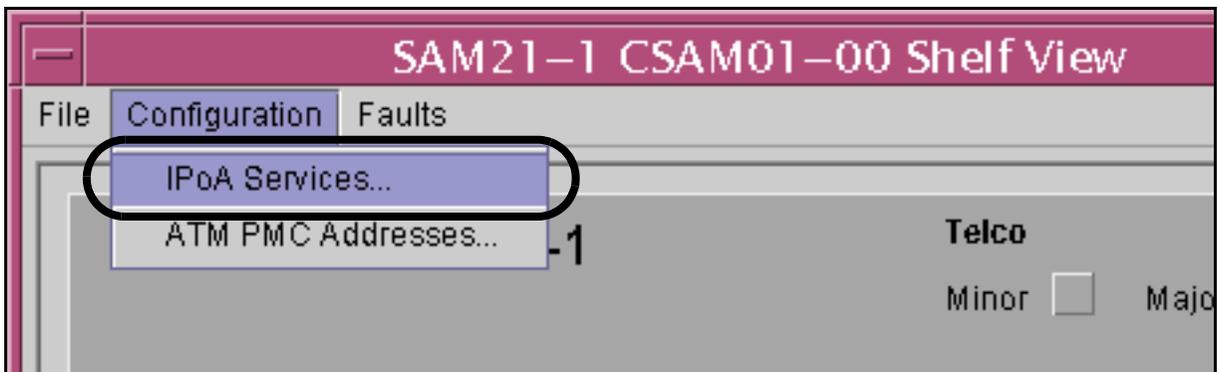

- 2 From the ATM Connections window, select the connection set to delete and then Delete Connection Set from the Connections drop down menu.

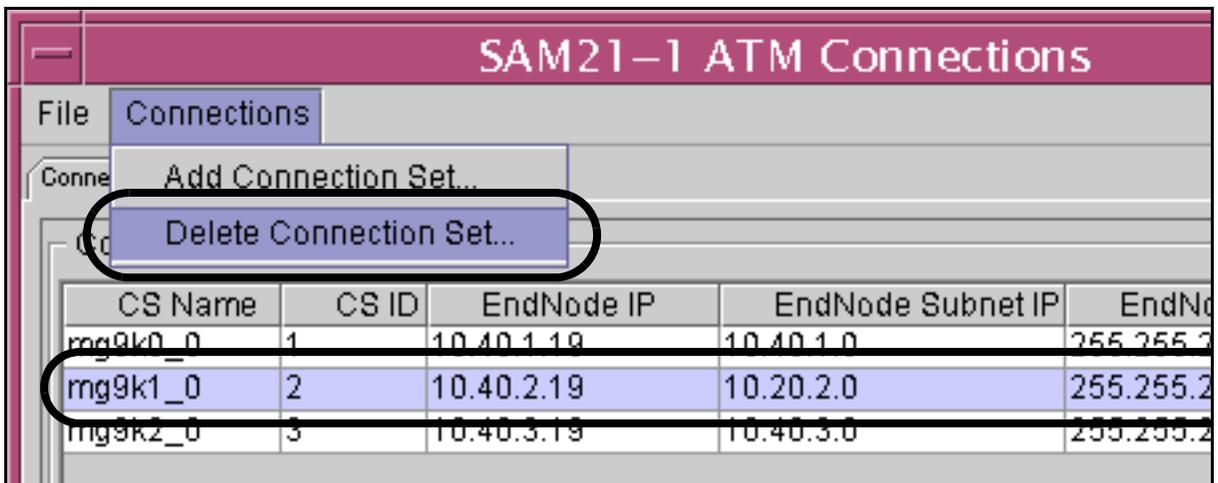

- 3 Repeat step 2 for each connection to delete.
- 4 This procedure is complete.

Reconfiguring ATM connection sets

ATTENTION

Perform this procedure at the direction of Nortel Networks support personnel.

At the CS 2000 SAM21 Manager client workstation

- 1** Delete the connection set and then add a new connection set with the revised data.
- 2** This procedure is complete.


Reconfiguring ATM PMC addresses

ATTENTION


Perform this procedure at the direction of Nortel Networks support personnel.

At the CS 2000 SAM21 Manager client workstation

- 1 From the Shelf View, right click on the Shelf Controller/ATM card to edit and select Lock from the context menu.

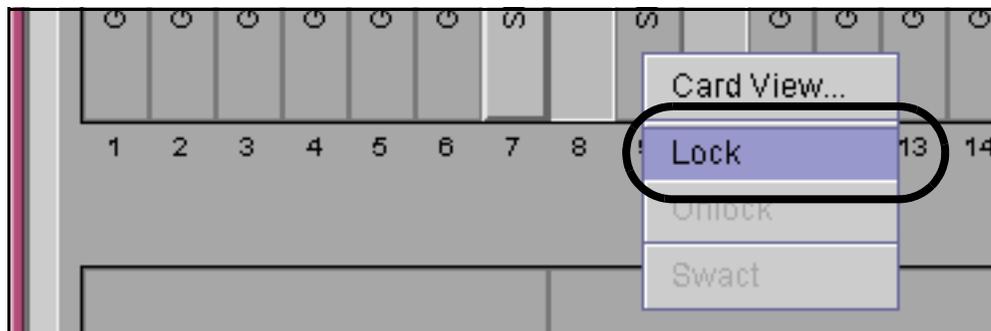

- 2 From the Shelf View, select Configuration and then ATM PMC Addresses from the menu bar to open the ATM Card Provisioning window.

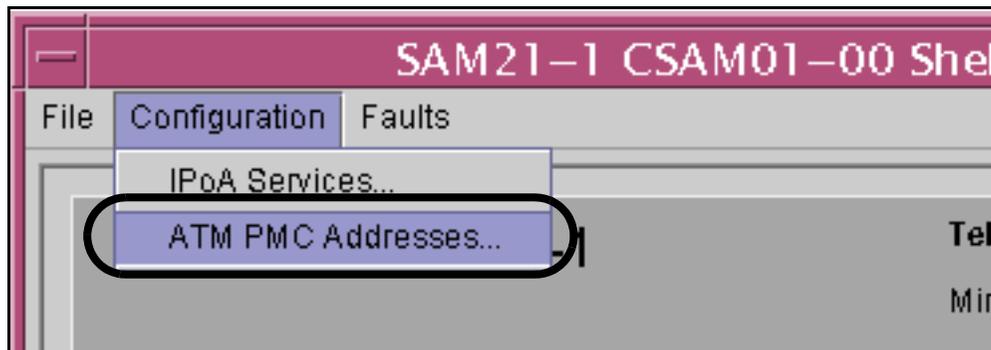

- 3 Enter the new provisioning data on the ATM Card Provisioning window and then select Save and Close.

SAM21-1 ATM Card Provisioning

ATM Card 0

Admin State: **Unlocked** Activity State: **Active**

ATM PMC IP: ATM PMC Subnet Mask:

47.142.226.252 255.255.255.0

ATM PMC AESA:

00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.02

ATM Card 1

Admin State: **Locked** Activity State: **Inactive**

ATM PMC IP: ATM PMC Subnet Mask:

47.142.226.251 255.255.255.0

ATM PMC AESA:

00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.00.03

Close


- 4 From the Shelf View window, right click on the locked Shelf Controller/ATM card and select Unlock from the context menu.
- 5 This procedure is complete.

Editing a SAM21 network element


This procedure explains how to change the CSAM number and shelf position.

At the CS 2000 SAM21 Manager client workstation

- 1 From the Subnet View window, select Configuration, Modify, and Existing SAM21 Network Element from the menu bar to open the Reprovisioning window.

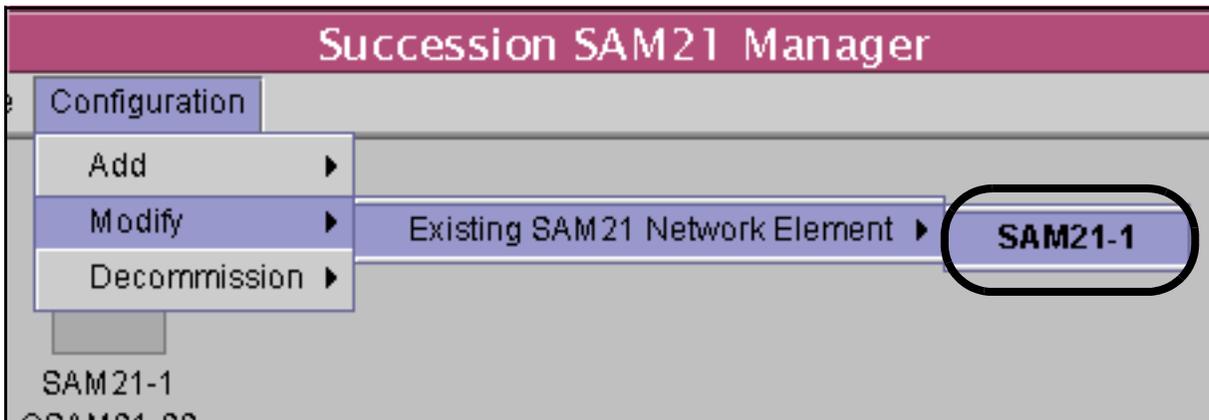

- 2 From the SAM21 Reprovisioning window, enter the provisioning data and select Save.

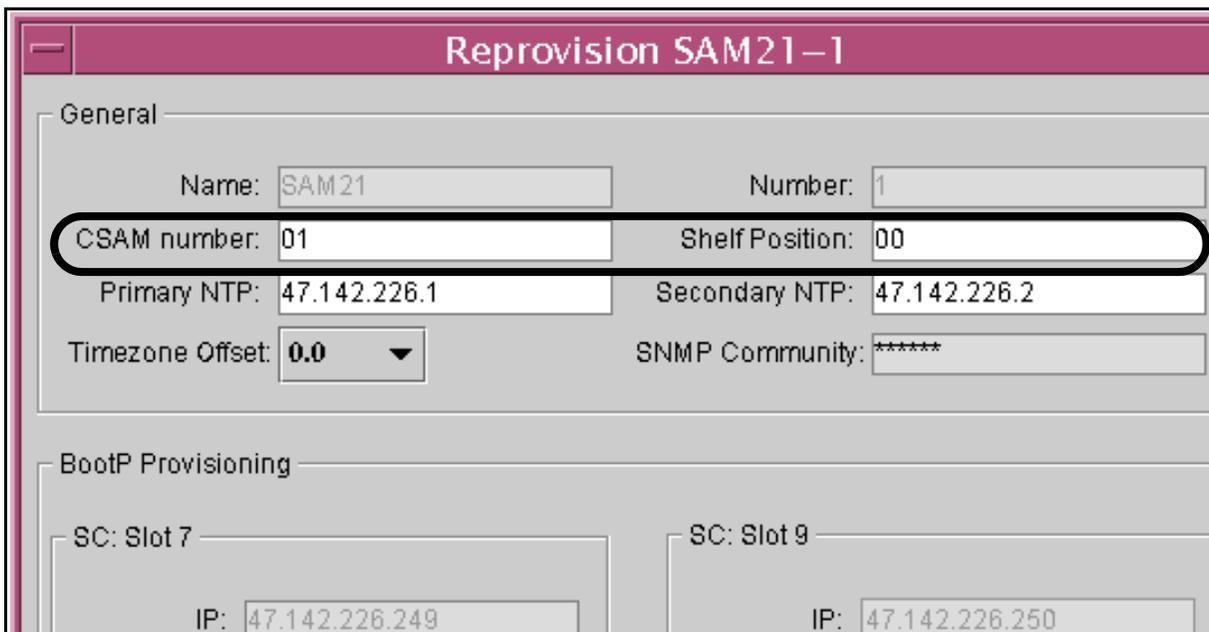

- 3 This procedure is complete.


Re-provision a shelf controller MAC address

ATTENTION


Perform this procedure at the direction of Nortel Networks support personnel.

At the CS 2000 SAM21 Manager client workstation

- 1 Select Configuration, Modify, and then the SAM21 to reconfigure from the menu bar of the subnet view.

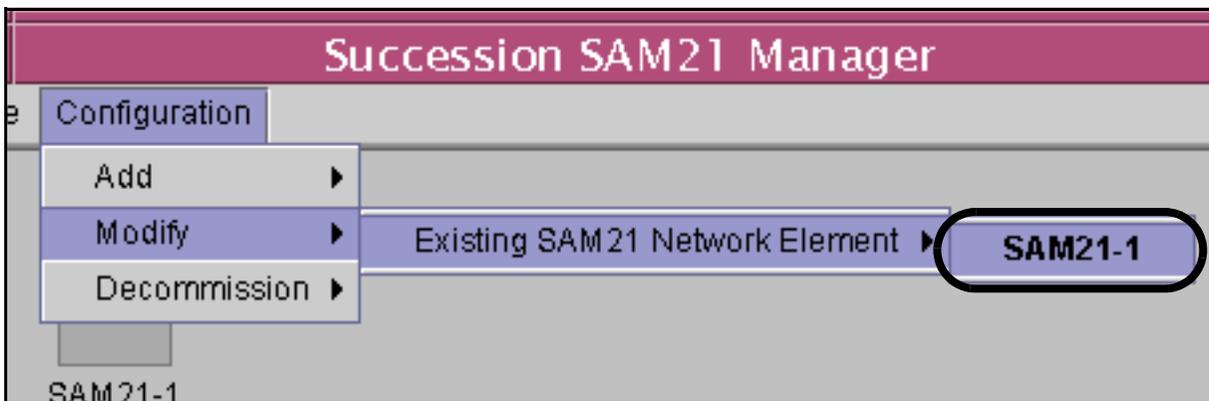

- 2 From the Reprovisioning window, enter the new MAC address for the replacement SC.

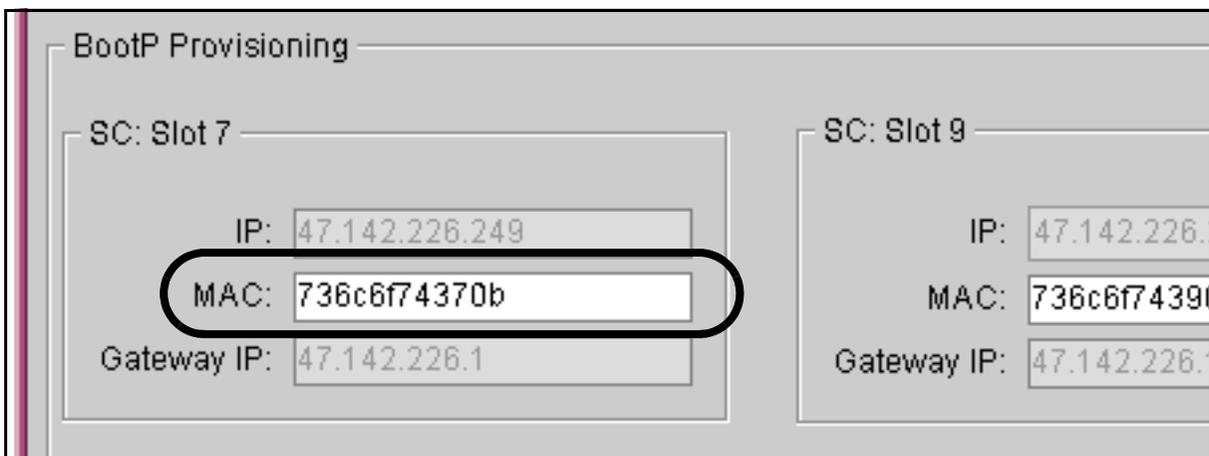

- 3 Select the Save button on the Reprovisioning window.
- 4 This procedure is complete.

Reconfigure NTP service

Use this procedure to change the NTP source for all the cards in the SAM21 shelf to a new NTP server. Reconfiguring the NTP server does not affect timing for call processing or signaling, the intent is to synchronize the timestamps on log reports.



CAUTION

Possible service interruption


Reconfiguring the NTP service requires locking and unlocking the cards in the shelf. Locking and unlocking the Shelf Controllers does not affect service, but locking and unlocking non-system slot (NSS) cards can disrupt service.

Gateway Controllers (GWC) do not require locking and unlocking to update the NTP server information. GWCs require a Warm Swact. Refer to “Invoking a manual protection switch (warm swact)” in *Gateway Controller Security and Administration*, NN10178-611 or NN10213-611.

For information about updating the NTP service on the Call Agents, refer to “Reconfigure NTP service” in *Call Agent Configuration Management*, NN10111-511.

At the CS 2000 SAM21 Manager client

- 1 Select the shelf to modify from the Subnet View.

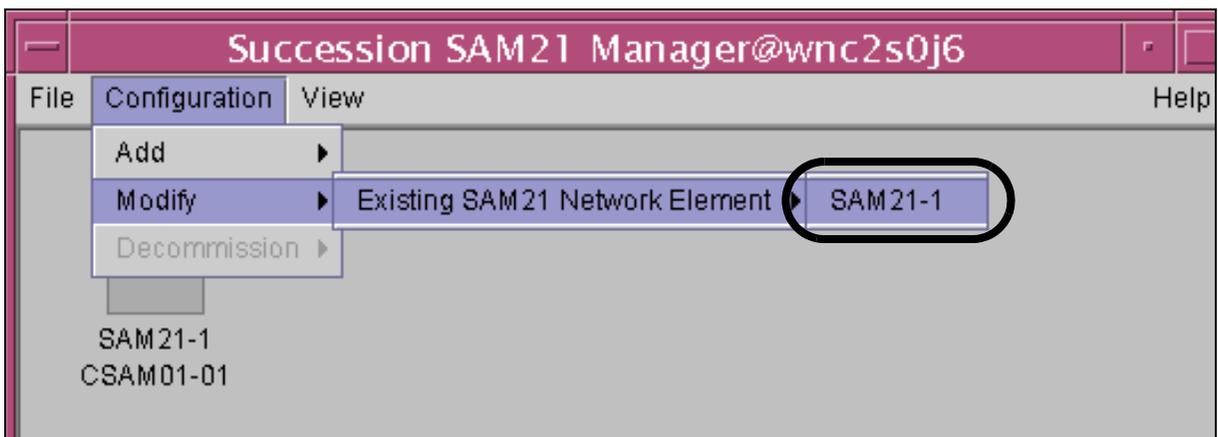

- 2 Replace the value in the Primary and Secondary NTP fields with the new NTP server addresses.

Reprovision SAM21-1

General


Name: Number:

CSAM number: Shelf Position:

Primary NTP: Secondary NTP:

Timezone Offset: SNMP Community:

- 3 Lock and unlock the inactive Shelf Controller.
 - Note 1:** Two critical alarms are raised after the lock and clear after the unlock.
 - Note 2:** If the Shelf Controllers are provisioned with ATM interfaces, verify that the inactive Shelf Controller does not carry the active ATM link. If necessary, switch link activity at the far end node.
- 4 Switch activity by selecting Swact from the card context menu. If the Shelf Controllers are provisioned with ATM interfaces, perform the Swact during a low traffic period.

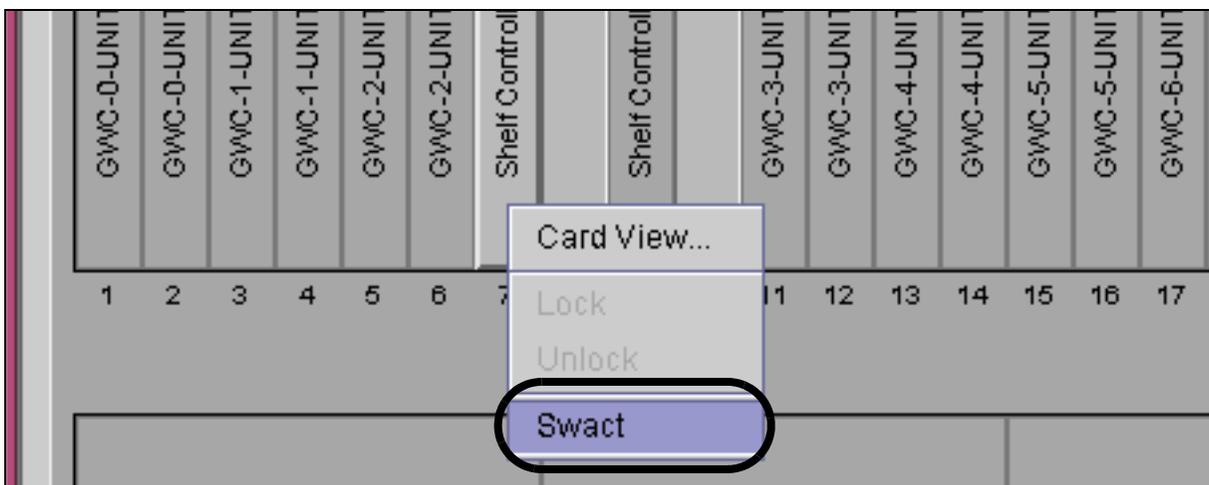

- 5 Lock and unlock the newly inactive Shelf Controller.
- 6 Lock and unlock each of the cards in the SAM21 shelf. For GWCs, open the GWC Manager. Refer to [Additional information](#).

Before locking any card, refer to the documentation for the card type and determine any precautions to take before locking the card.


- 7 This procedure is complete.

Additional information

Some network components require different maintenance activities to update the NTP server information.

Gateway Controller

To update the NTP server information in a GWC, warm swact one unit of the GWC node and then warm swact again to update the second unit in the node. Open the GWC Manager by selecting Show Node View from the Shelf View.

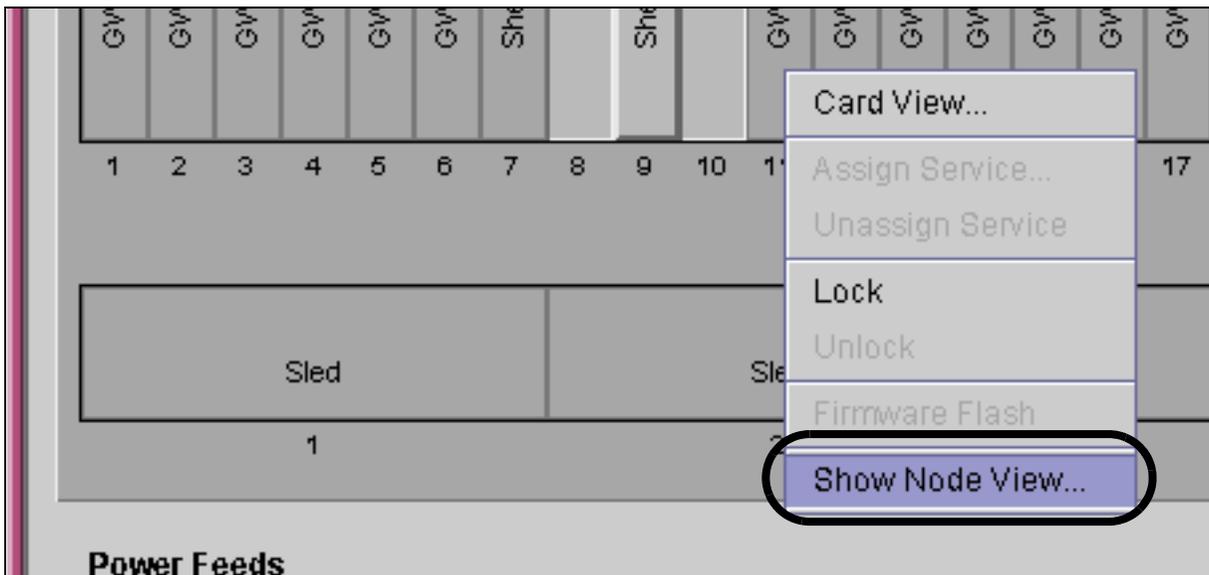

Once the GWC Manager opens, use the WarmSwact button on the maintenance tab to update the NTP information. Warm Swact the GWC

node twice so that both GWC units are updated. Perform these Warm Swacts for all GWC nodes in the SAM21 shelf.

UNIT-1

Administrative state:	unlocked(1)	Usage state:	idle(1)
Operational state:	enabled(1)	Stand by state:	hotStandby(1)
Activity state:	standby(2)	Swact state:	noSwAct(0)
Isolation state:	notIsolated(2)	Alarm state:	00 00 00 00
Available state:	00 00 00 00	Fault state:	none(0)
Loadname:	PGC09AN		

Save Image Busy (Disable) RTS (Enable) Card View

Force **Warm Swact** Cold Swact

After any unlock, RTS, or Swact to a Gateway Controller (GWC), the GWC makes its first NTP requests to the primary NTP server. If the service is unavailable, the GWC makes a final NTP service request to the CS 2000 Management Tools server. For the SN06 release, the secondary NTP server is ignored.

STORAge Management


For offices with a CS 2000 - Compact, this procedure does not change the NTP source for SAM-XTS STORAge Management (STORM) units.

Provision an unconfigured shelf


Use this procedure to provision an installed but unconfigured shelf.

At the CS 2000 SAM21 Manager client

- 1 Use the Subnet View window to add the SAM21 shelf.

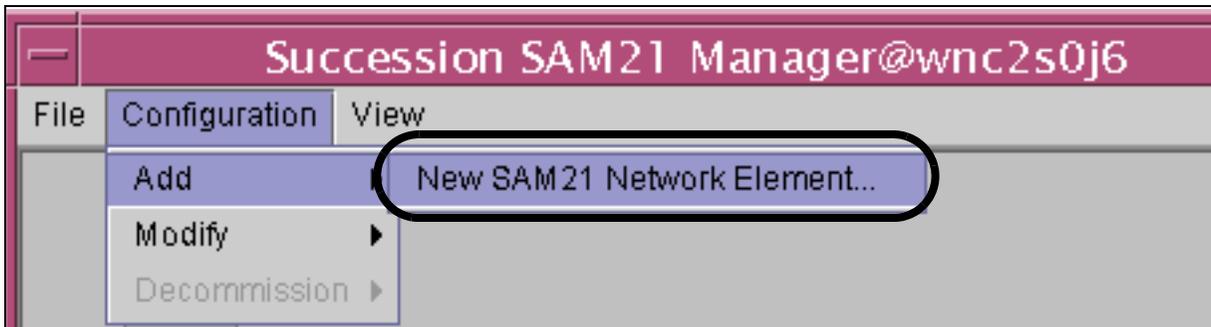

- 2 Provision the shelf data on the SAM21 Provisioning window.

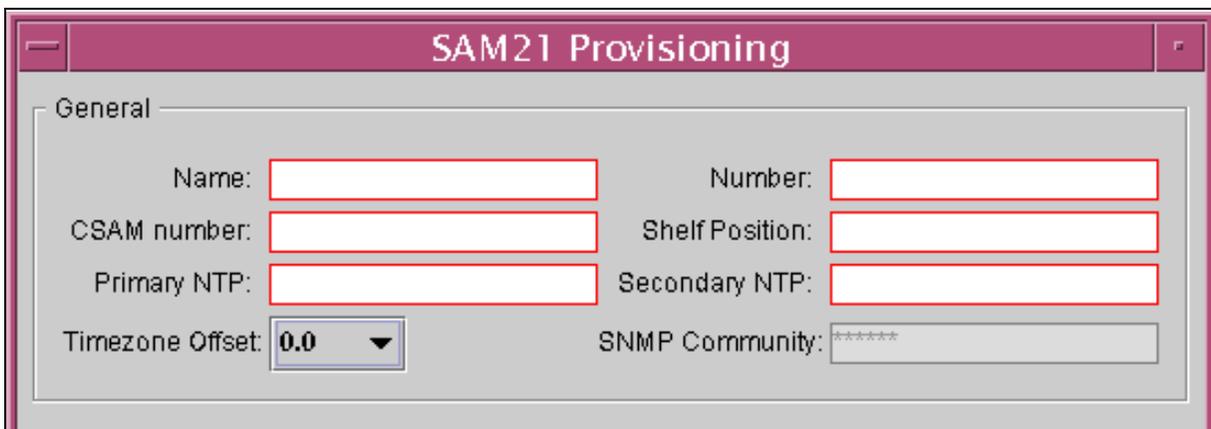A screenshot of a software window titled "SAM21 Provisioning". The window has a "General" tab. The fields are: "Name:" (text box), "Number:" (text box), "CSAM number:" (text box), "Shelf Position:" (text box), "Primary NTP:" (text box), "Secondary NTP:" (text box), "Timezone Offset:" (dropdown menu with "0.0" selected), and "SNMP Community:" (text box with "*****" visible).

Note: Enter the provisioning data carefully. Once entered, some data cannot be changed without powering down the shelf.

Name

Enter the name of the SAM21 shelf. A recommended value is SAM21. This value cannot be reprovioned once saved.

Number

Enter the number of this SAM21shelf. The name and number values are concatenated to produce the identity of the shelf such as SAM21-1. This value cannot be reprovioned once saved.

CSAM number

Enter the number of the CSAM shelf or PTE frame in which the SAM21 shelf is deployed.

Shelf Position

CSAM cabinets have bottom (00) and top (01) positions. PTE frames have bottom (00), middle (01), and top (02) positions.

Primary NTP and Secondary NTP

Enter the IP addresses of the office network time protocol (NTP) servers.

Timezone Offset

Use the pulldown menu to select the timezone offset from Greenwich Mean Time (GMT).

Slot 7 and Slot 9 IP and MAC addresses

Enter the MAC and IP addresses for each Shelf Controller. The IP address of the Shelf Controller in slot 9 is the IP address of the slot 7 Shelf Controller plus one.

Gateway IP and Subnet Mask

Enter the IP address of the default router or gateway machine and the subnet mask for that IP address.

SAM21EM server IP


Enter the IP address of the CS 2000 Management Tools server that hosts the CS 2000 SAM21 Manager server application.

Server IP, Path, and Load

Enter the IP address of the CS 2000 Core Manager, the path to the Shelf Controller software load, and the name of the Shelf Controller software load. The expected value for the path is `/swd/sam21`. Determine the load name from the SWIM level of the CS 2000 Core Manager. The expected value for the SN06 release resembles `9.0.x.0`.

- 3 Review the provisioning data. If any fields are surrounded in red, click the Details button for information about provisioning that field.

- 4 Click the Save button to commit the provisioning data.
An undiscovered node icon appears in the Subnet View window.

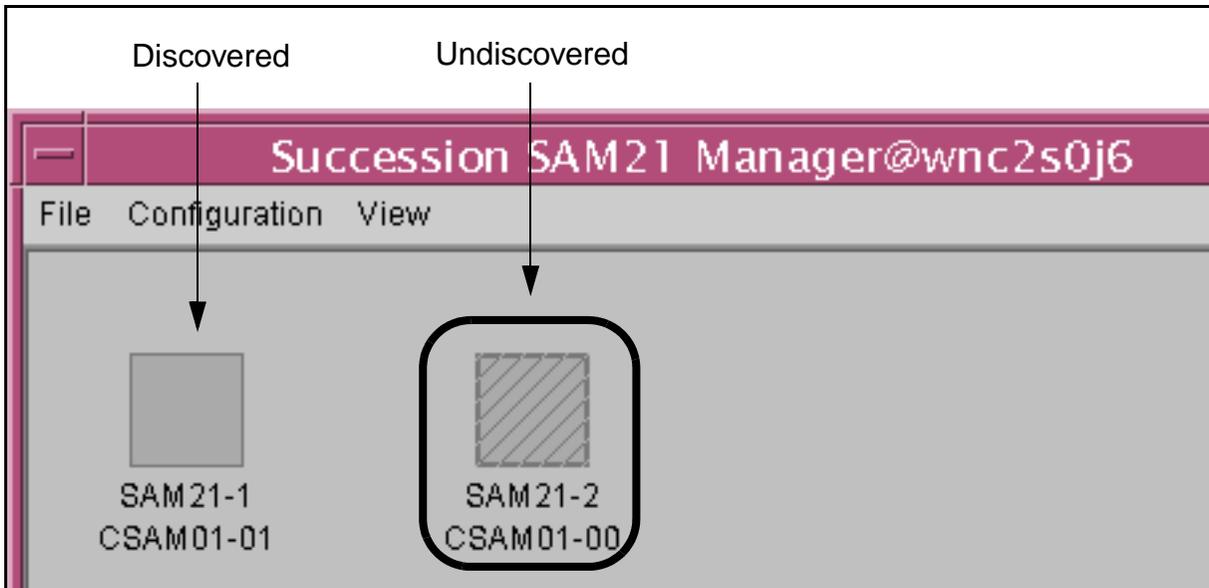

- 5 Wait for the newly provisioned shelf to be discovered by the CS 2000 SAM21 Manager server software. Discovery can require up to 15 minutes.
- 6 This procedure is complete.

Troubleshooting

If the shelf is not discovered within 15 minutes, review the following items:

1. IP address, path, and load are provisioned correctly
2. BOOTP service is in-service on the CS 2000 Core Manager
3. MAC addresses for the Shelf Controllers are provisioned correctly
4. any routers between the CS 2000 Core Manager and the Shelf Controllers are configured to permit BOOTP traffic


If these items are reviewed and the shelf is still not discovered, refer to procedure "Shelf Controller does not unlock" in *Upgrading the SAM21 Shelf Controller*, NN10067-461.

Reprovision a CS 2000 SAM21 network element

Use this procedure to modify provisioning data for a discovered SAM21 network element.

At the CS 2000 SAM21 manager client

- 1 Click the Configuration menu and select the Modify option, followed by the Existing SAM21 Network Element option. Then select the name of the Network Element.

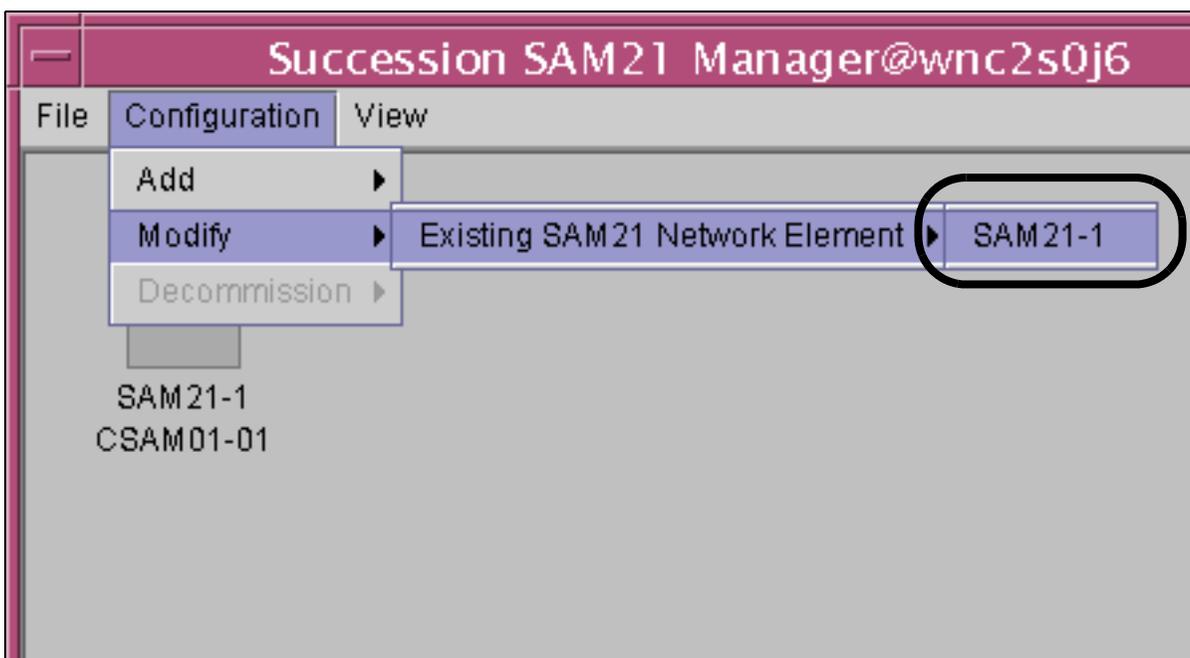

The Reprovisioning window appears.

- 2 Modify the data you wish to change, and click the "Save" button.

Reprovision SAM21-1

General

Name:	<input type="text" value="SAM21"/>	Number:	<input type="text" value="1"/>
CSAM number:	<input type="text" value="01"/>	Shelf Position:	<input type="text" value="01"/>
Primary NTP:	<input type="text" value="47.142.226.247"/>	Secondary NTP:	<input type="text" value="47.142.226.248"/>
Timezone Offset:	<input type="text" value="0.0"/> ▼	SNMP Community:	<input type="text" value="*****"/>

BootP Provisioning

<p>SC: Slot 7</p> <table style="width: 100%;"><tr><td>IP:</td><td><input type="text" value="47.142.226.249"/></td></tr><tr><td>MAC:</td><td><input type="text" value="00ff00ff00ff"/></td></tr></table>	IP:	<input type="text" value="47.142.226.249"/>	MAC:	<input type="text" value="00ff00ff00ff"/>	<p>SC: Slot 9</p> <table style="width: 100%;"><tr><td>IP:</td><td><input type="text" value="47.142.226.250"/></td></tr><tr><td>MAC:</td><td><input type="text" value="ff00ff00ff00"/></td></tr></table>	IP:	<input type="text" value="47.142.226.250"/>	MAC:	<input type="text" value="ff00ff00ff00"/>
IP:	<input type="text" value="47.142.226.249"/>								
MAC:	<input type="text" value="00ff00ff00ff"/>								
IP:	<input type="text" value="47.142.226.250"/>								
MAC:	<input type="text" value="ff00ff00ff00"/>								
<p>Gateway IP and Subnet Mask</p> <table style="width: 100%;"><tr><td>IP:</td><td><input type="text" value="47.142.226.1"/></td><td>Mask:</td><td><input type="text" value="255.255.255.0"/></td></tr></table>		IP:	<input type="text" value="47.142.226.1"/>	Mask:	<input type="text" value="255.255.255.0"/>				
IP:	<input type="text" value="47.142.226.1"/>	Mask:	<input type="text" value="255.255.255.0"/>						
<p>SAM21 EM Server</p> <table style="width: 100%;"><tr><td>IP:</td><td><input type="text" value="47.142.226.247"/></td><td>Port:</td><td><input type="text" value="9560"/></td></tr></table>		IP:	<input type="text" value="47.142.226.247"/>	Port:	<input type="text" value="9560"/>				
IP:	<input type="text" value="47.142.226.247"/>	Port:	<input type="text" value="9560"/>						
<p>Load Info</p> <table style="width: 100%;"><tr><td>Server IP:</td><td><input type="text" value="47.142.226.10"/></td></tr><tr><td>Server Path:</td><td><input type="text" value="/swd/sam21"/></td></tr><tr><td>Server Load:</td><td><input type="text" value="9.0.18.0"/></td></tr></table>		Server IP:	<input type="text" value="47.142.226.10"/>	Server Path:	<input type="text" value="/swd/sam21"/>	Server Load:	<input type="text" value="9.0.18.0"/>		
Server IP:	<input type="text" value="47.142.226.10"/>								
Server Path:	<input type="text" value="/swd/sam21"/>								
Server Load:	<input type="text" value="9.0.18.0"/>								

The following table describes the fields:

Field	Meaning
Timezone Offset (see Note 2)	the number of hours the client's subnet is offset from Greenwich mean time (GMT). The range is -12 to 12.
SNMP Community (see Note 3)	the simple network management protocol area
CSAM number	the number of the CSAM unit
Shelf position	the position of the SAM21 shelf within the cabinet. <ul style="list-style-type: none">• in a C28 cabinet, 00 (bottom) or 01 (top)• in a PTE2000 frame, 00 (bottom), 01 (middle), or 02 (top)
Primary NTP	the IP address of the primary NTP server
Secondary NTP	the IP address of the secondary NTP server
MAC (Slot 7)	the MAC address of the SC in slot 7
MAC (Slot 9)	the MAC address of the SC in slot 9
IP (CS 2000 SAM21 Manager server)	the IP address of the host that is running the CS 2000 SAM21 Manager

Field	Meaning
Port (CS 2000 SAM21 Manager server)	the port on which the CS SAM21 Manager server is available
Server Load	the name of the Shelf Controller software load

Note 1: When a field cannot be changed, the field is greyed out. Some fields can only be changed when the node is undiscovered, such as when the shelf is powered down.

Note 2: The Timezone Offset list applies to KDC and GWC cards.

Note 3: The SNMP Community box applies only to GWC cards.

The SAM21 is reprovisioned and appears on the SAM21 Manager window.

- 3 This procedure is complete.