



Call Agent Security and Administration

Each of the three interfaces to the Call Agent have security features and user administration.

- Call Agent Manager
- MAP
- CS 2000 SAM21 Manager client

What's new in security and administration for SN07

This document did not change for the SN07 release.

What's new in security and administration for SN06

In the SN06 and ISN06 releases, login connectivity is allowed from all hosts on the Communications Server LAN (CS LAN). Allowing CS LAN logins was enabled to assist Nortel Networks installation personnel. Nortel Networks expects that telephone operating company personnel will continue to perform OAM&P activities with a PassThru user account that is configured on the CS 2000 Core Manager.


What's new in security and administration for SN05

For the SN05 and ISN05 releases, the Call Agent stores a local password file in `/var/log/passwd`. This feature enables telephone operating company personnel to add and remove users as well as change passwords for increased security. The password file is located in a directory that is mounted over the network file system (NFS) at boot time and then copied over the `/etc/passwd` file. If the NFS mount is unavailable at boot time, the Call Agent reverts to the default password file provided by Nortel Networks.

Security strategy overview

The Call Agent platform hardware and software is protected by the CS 2000 SAM21 Manager server and client. For security features about these elements, refer to the *CS 2000 Management Tools Security and Administration*, NN10172-611.

The Call Agent Manager and MAP are available after the PassThru feature is configured on the CS 2000 Core Manager. Logging into the CS 2000 Core Manager with one of the configured PassThru usernames provides a connection between the local machine and the Call Agent Manager or MAP.

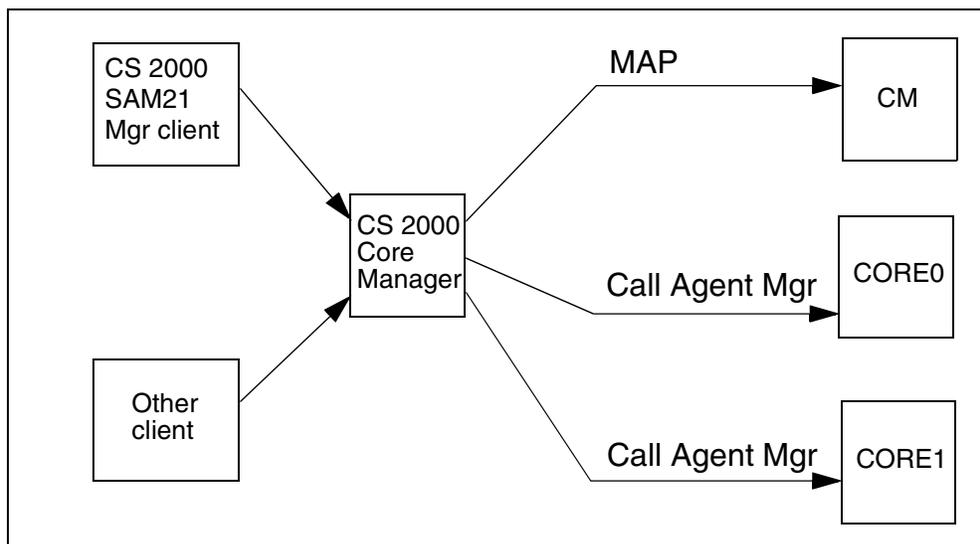

Access to the MAP is available by telnetting to the CS 2000 Core Manager as user “cmusr” and then logging in with a valid username and password. This username, like the next two, are Nortel Networks suggested names, but the usernames are configurable when the PassThru feature is configured at the CS 2000 Core Manager.

Access to the Call Agent Manager on the unit 0 Call Agent is available by telnetting to the CS 2000 Core Manager as user “core0usr” and then providing a valid username and password. Once logged in, type **ccamtc** and press the Enter key.

Access to the Call Agent Manager on unit 1 Call Agent is available by telnetting to the CS 2000 Core Manager as user “core1usr” and then providing a valid username and password. Once logged in, type **ccamtc** and press the Enter key.

User authentication is required at the client workstation, and the destination host.

Call Agent Manager procedures

The Call Agent Manager provides an interface to the platform software and utilities of the Call Agent. Platform software includes the operating system and other non-call processing software.

For the SN05 and newer releases, user administration is available for the Call Agent platform software. Refer to [Change user password](#) and [Platform user administration](#) for details.

Drop call processing application synchronization

The **DpSync** command is available from the active Call Agent only.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.
CoreMtc
- 2 Enter the Appl level.
Appl
- 3 Enter the DpSync command.
DpSync

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              simplx
              M
Appl
0 Quit         Unit0 Act    no      . Inact . Act   . .   nosync .
2 ImgTst      Unit1 Inact  no      . Act  . Inact . .   nosync /restart
3 Sync
4 DpSync
5
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP    DpSync:   Drop application synchronization.
16                               Parns: [RestartType]
17 Help                               Restart - ( WARM | COLD | RELOAD | NORESTART )
18 Refresh                               (default) - COLD
      mtc
Time 12:25

```

- 4 This procedure is complete.

Additional information

Successful completion of the command is indicated with a screen similar to the following:

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .        .        simplx
                M
Appl
0 Quit        Unit0  Act     no       . Inact  . Act   . .     Appl:
2 ImgTst     Unit1  Inact   no       . Act   . Inact . .     nosync .
3 Sync
4 DpSync
5
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh   DpSync - Command passed.
   mtc
Time 12:22 >

```

Application is not synchronized and the command passed.

If the command is attempted from the inactive unit, the Call Agent responds:

```
DpSync - Command rejected. Reason: Not active unit.
```

Test application images

The **ImgTst** command is available from the active Call Agent only.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the Appl level.

Appl

- 3 Enter the ImgTst command.

ImgTst

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              ImgTst

Appl
0 Quit          Unit0 Act    no      . Inact . Act   .      .      nosync .
2 ImgTst       Unit1 Inact  no      . Act   . Inact .      .      nosync /imgtst
3 Sync
4 DpSync
5
6
7
8
9
10
11
12
13 LogQuery
14 Alarm       ImgTst:   Test for image restartability on inactive unit.
15 QueryIP     Parms: RequestType TestType [NOSYNC]
16             ReqType   - ( RUN | QUERY )
17 Help        TestType  - ( WARM | COLD | RELOAD )
18 Refresh     NOSYNC    - for no application sync after test
   mtc
Time 12:30 >imgtst run warm

```

- 4 This procedure is complete.

Additional information

Successful completion of the command is indicated with a screen similar to the following:

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

Appl
0 Quit        Unit0  Act      no      . Inact . Act      .      .
2 ImgTst     Unit1  Inact    no      . Act   . Inact  .      .
3 Sync
4 DpSync
5
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh   ImgTst run warm - Command passed.
   mtc
Time 12:40 >

```

Application is synchronized and the command passed.

If the command is attempted from the inactive unit, the Call Agent responds:

```

ImgTst run warm - Command rejected. Reason: Not active unit.

```

Synchronize call processing applications

The **Sync** command is available from the active Call Agent only.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the Appl level.

Appl

- 3 Enter the Sync command.

Sync

```
CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              simplx
              M
Appl
0 Quit         Unit0 Act    no      . Inact . Act   .      .      nosync /syncing
2 ImgTst      Unit1 Inact  no      . Act  . Inact .      .      nosync /syncing
3 Sync
4 DpSync
5
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh    Sync:      Synchronize the applications.
   mtc
Time 12:27 >
```

- 4 This procedure is complete.

Additional information

Successful completion of the command is indicated with a screen similar to the following:

```
CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

Appl
0 Quit        Unit0  Act    no    . Inact . Act  .   .   Appl:
2 ImgTst     Unit1  Inact  no    . Act  . Inact .   .   insync .
3 Sync
4 DpSync
5
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh   Sync - Command passed.
   mtc
Time 12:28 >
```

If the command is attempted from the inactive unit, the Call Agent responds:

Sync - Command rejected. Reason: Not active unit.

Jamming a Call Agent

Jamming the Call Agent places the inactive unit in a maintenance state and prevents a Switch of Activity (SWACT) from the active unit to the inactive unit.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the CAMtc level.

CAMtc

- 3 Enter the Jam command.

Jam

```

CallAgent      SYS      CON      APPL      Unit: 0
  JInact       .        .        .

CAMtc
0 Quit        Unit0 Act   no    . Inact . Act   .    .   insync .
2 Jam         Unit1 Inact  yes   . Inact . Act   .    .   insync .
3 RelJam
4 REXtSt
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16           Jam:      Jam the inactive unit, to prevent it taking activity.
17 Help      Pams: [FORCE]
18 Refresh   FORCE      - bypass system stability checks
  mtc
Time 10:38 >

```

- 4 This procedure is complete.

Additional information

The Jam command must be issued from the active Call Agent. A request on the inactive Call Agent is refused with the following message.

```
Jam - Command rejected. Reason: Not active unit.
```

Successful execution returns a screen similar to the following figure:

```
CallAgent      SYS      CON      APPL      Unit: 1
JInact      .      .      .

CAMtc
0 Quit      Unit0  Inact  yes  . Act  . Inact  .  .  insync .
2 Jam      Unit1  Act   no   . Act  . Inact  .  .  insync .
3 RelJam
4 RExTst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh  Jam - Command passed.
    mtc
Time 12:15 >
```

Releasing a jammed Call Agent

Releasing a jammed Call Agent removes the inactive unit from a maintenance state and prepares the inactive unit for service.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the CAMtc level.

CAMtc

- 3 Enter the RelJam command.

RelJam

```

CallAgent      SYS      CON      APPL      Unit: 0
  JInact       .        .        .

CAMtc
0 Quit        Unit0  Act    no    . Inact . Act    .    .    insync .
2 Jam         Unit1  Inact  yes   . Inact . Act    .    .    insync .
3 RelJam
4 REXtst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh    RelJam:  Release jam on the inactive unit.
   mtc
Time 10:38 >

```

- 4 This procedure is complete.

Additional information

Successful completion returns the following message:

```
RelJam - Command passed.
```

If the command is attempted from the inactive unit, the Call Agent responds:

```
RelJam - Command rejected. Reason: Not active unit.
```

Executing a routine exercise test

Routine Exercise Tests (RExTst) are executed every 24 hours as a part of automatic maintenance. Use this procedure to invoke a manual RExTst.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the CAMtc level.

CAMtc

- 3 Enter the RExTst command.

RExTst RUN

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

CAMtc
0 Quit         Unit0 Act    no    . Inact . Act    .    .    insync .
2 Jam         Unit1 Inact  no    . Inact . Act    .    .    insync .
3 RelJam
4 RExTst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP     WARNING: The RExTst command runs an image test, hardware
16             diagnostics, a hardware reset and a reboot of the
17 Help             inactive unit.
18 Refresh     Please confirm ("YES", "Y", "NO", or "N"):
    mtc
Time 14:07 >

```

- 4 Confirm the test.
- 5 Query the results of the RExTst.

RExTst QUERY
- 6 This procedure is complete.

Additional information

The command must be run from the active unit or the system rejects the command with the following message:

```
RExTst run - Command rejected. Reason: Not active
unit.
```

Progress indicators

During the routine exercise test, the screen looks similar to the following figure:

```
CallAgent      SYS      CON      APPL      Unit: 1
RExTst      .      .      ImgTst

CAMtc
0 Quit      Unit0  Inact  no      . Act   . Inact .   .   nosync /imgtst
2 Jam      Unit1  Act   no      . Act   . Inact .   .   nosync .
3 RelJam
4 RExTst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP  WARNING: The RExTst command runs an image test, hardware
16          diagnostics, a hardware reset and a reboot of the
17 Help          inactive unit.
18 Refresh  Please confirm ("YES", "Y", "NO", or "N"):
   mtc
Time 14:08 >y
```

Queried results for success routine exercise tests look similar to the following figure:

```

CallAgent      SYS      CON      APPL      Unit: 1
.              .              .              .

CAMtc
0 Quit         Unit0  Inact   no       . Act    . Inact  .      . insync .
2 Jam          Unit1  Act     no       . Act    . Inact  .      . insync .
3 RelJam
4 RExTst
5 SwAct
6
7
8
9
10
11
12             Results for QUERY LAST REX TEST:
13 LogQuery
14 Alarm       Last run on: Mon Nov 5 12:32:03 2001
15 QueryIP     Unit Tested: 0
16             Initiator: MANUAL
17 Help        Class: FULL
18 Refresh     Result: PASSED
   mtc
Time 12:36 >

```


CS 2000 SAM21 Manager client progress indicators

The RExTst has 5 stages:

1. image test
2. sanity test
3. hardware diagnostic test
4. reset and reboot
5. call processing application synchronization

During stages 3 and 4, the CS 2000 SAM21 Manager client indicates that the Call Agent is unlocked-disabled-in test. Otherwise, the

Call Agent appears as unlocked-enabled-none. The following figure shows the Call Agent in the unlocked-disabled-intest state.

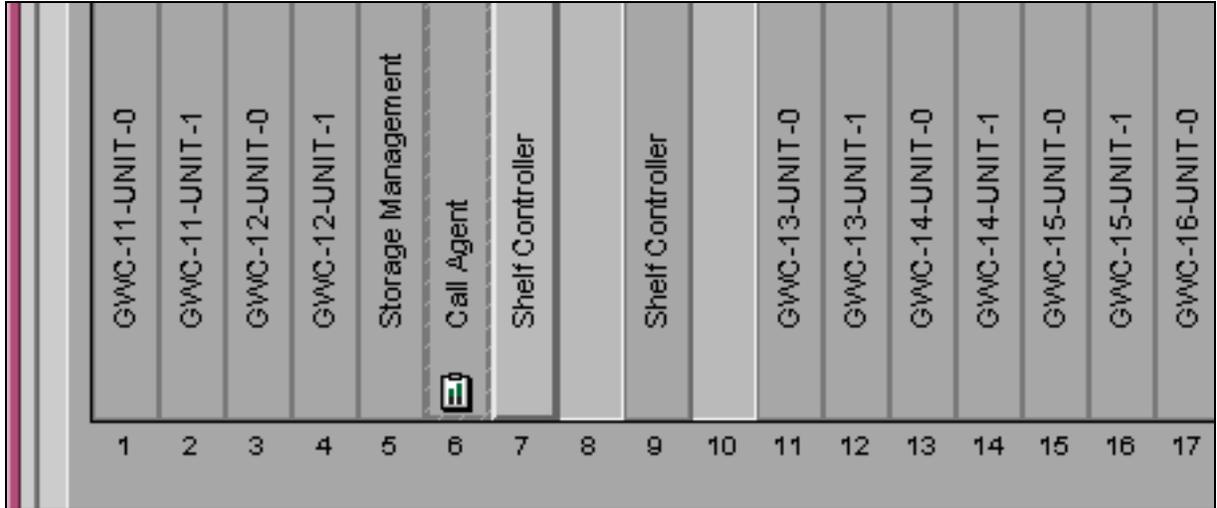

After the REXtst completes successfully, the Call Agent is restored to unlocked-enabled-none. If the REXtst fails, the Call Agent card icon turns red and the SAM21 Shelf Controller begins recovery of the Call Agent.

Log reports

Successful completion of the REXtst generates the following logs:

- CCA660 "REx Test Started"
- CCA620 "Image Test Started"
- CCA315 "Application Out-of-Sync (simplex)"
- CCA616 "Application In-Service"
- CCA615 "Application In-Sync"
- CCA621 "Image Test Finished"
- CCA661 "REx Test Finished"

Use the **LogQuery** command from the Call Agent Manager to review logs.

Canceling a routine exercise test

This procedure requires a second log in to the active Call Agent card.

Canceling a routine exercise test (REXTst) is only available during the image test (ImgTst) and synchronization (sync) stages of the REXTst. The command is rejected during the diagnostics stage of the REXTst and when the Call Agent is rebooting.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the CAMtc level.

CAMtc

- 3 Terminate the REXTst.

REXTst TERMINATE

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

CAMtc
0 Quit        Unit0  Act    no    . Inact . Act    .    .    insync .
2 Jam        Unit1  Inact  no    . Inact . Act    .    .    insync .
3 RelJam
4 REXTst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh
   mtc
Time 07:57 >

```

- 4 This procedure is complete.

Switching activity



CAUTION

Possible service interruption

Performing a switch of activity (SWACT) from the ccamtc interface affects call processing. Only execute this procedure at the direction of Nortel Networks support personnel.

Performing a NORESTARTSWACT from the BCSUPDATE level of the MAP does not drop existing calls. If SWACT is necessary, Nortel Networks recommends performing a DpSync from the active Call Agent Manager, and then LIMITED_PRESWACT and NORESTARTSWACT from the BCSUPDATE level of the MAP.

ATTENTION

The Call Agent waits 10 minutes after a switch of activity (SWACT) before synchronizing the call processing application software.

Manual synchronization is available immediately after the SWACT from the APPL level of the Call Agent Manager.

A NORESTARTSWACT from the call processing application may be preferred. A NORESTARTSWACT has a lesser service impact and denies new originations for less than 15 seconds, depending on office datafill and traffic.

Restart types

When using the **SWACT** or **SWACT FORCE** commands, the state of the call processing application determines the type of restart:

- **SWACT**
If in sync for more than 10 minutes since the last call processing application restart, the restart is WARM.
- **SWACT FORCE**
If in sync and less than 10 minutes since the last call processing application restart, the restart is COLD or RELOAD and is determined by the progression from the last restart. If out of sync, the restart is COLD or RELOAD and is determined by the progression from the last restart.

When to use this procedure

Use this procedure at the direction of Nortel Networks support personnel.

At the active Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the CAMtc level.

CAMtc

- 3 Enter the SwAct command.

SwAct

```
CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

CAMtc
0 Quit         Unit0  Act      no      . Inact . Act      .      .  insync .
2 Jam         Unit1  Inact    no      . Inact . Act      .      .  insync .
3 RelJam
4 RExTst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP     WARNING: This action will result in a CALL PROCESSING OUTAGE.
16             The SwAct command switches unit activity, followed
17 Help        by an application warm restart.
18 Refresh     Please confirm ("YES", "Y", "NO", or "N"):
    mtc
Time 13:03 >
```

- 4 Confirm the SwAct.
- 5 This procedure is complete.

Additional information

The SwAct command must be issued from the active Call Agent. A request from the inactive Call Agent is rejected with a message similar to the following.

```
SwAct - Command rejected. Reason: Not active unit.
```

The SwAct command also runs a series of prechecks before executing. The SwAct command fails under the following conditions:

- the call processing application is not synchronized
- the call processing application is creating an image dump
- the processor occupancy is too high
- less than 10 minutes have passed since the last call processing application restart

Note: Refer to SWACT FORCE below to override the checks.

Successful execution of the command forces the call processing application into simplex mode and raises a major application alarm.

```
CallAgent      SYS      CON      APPL      Unit: 1
.              .        .        simplx
              M
CAMtc          Jam:   Link0:  Link1:  BLnk:  FC:  Appl:
0 Quit        Unit0  Inact   no      . Inact . Act   .    .  nosync /restart
2 Jam         Unit1  Act     no      . Inact . Act   .    .  nosync /restart
3 RelJam
4 RExTst
5 SwAct
6
7
8
9
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh    SwAct - Command passed.
   mtc
Time 13:02 >
```

The SWACT command also has a force option. Do not perform a SWACT FORCE without the authorization of Nortel Networks support personnel.

WARNING: This action will result in a CALL PROCESSING OUTAGE.
The SwAct force command switches unit activity,
followed by an application restart. If another restart
has occurred within the last 10 minutes, the restart
associated with the swact will progress to the next
restart type.

Please confirm ("YES", "Y", "NO", or "N"):

Retrieve IP addresses

At the Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the QueryIP command.

QueryIP

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

CoreMtc
0 Quit      Unit0 Inact
2 CAMtc    Unit1 Act
3 Sys
4 Con
5 Appl
6
7      Query IP Address report for unit 0:
8
9      Description      IP Address
10     localptp           192.168.1.1
11     localport0        47.1.226.9
12     localport1        47.1.226.10
13     localblade        47.1.226.14
14     activeirm         47.1.226.16
15     inactiveirm       47.1.226.15
16     mateptp           192.168.1.2
17     mateport0        47.1.226.12
18     mateport1        47.1.226.13
19     mateblade        47.1.226.14
20
21     mtc
Time 14:29 >
    
```

Because Unit 0 is the local unit providing the information, Unit 0 is the local unit number.

In this figure, Unit 0 is the inactive Call Agent.

The localblade is the IP address of the inactive Call Agent.

- 3 This procedure is complete.

Additional information

The IP address scheme is as follows:

- localptp and mateptp
These addresses are Point to Point (PTP) links from one unit to the other. This link is created on the fiber channel and is used for maintenance messaging. It is not available to users.
- localport0, localport1, mateport0, and mateport1
These addresses reflect the first and second 100BaseT Ethernet interfaces for each unit.
- localblade and mateblade
These are virtual addresses that are mapped to the active ethernet port on each unit.
- activeirm and inactiveirm
These are virtual addresses. The address of the activeirm is the address of the call processing application.

The IP addresses for localblade and mateblade are provisioned by Nortel Networks Installation Services Technology personnel at the CS 2000 SAM21 Manager client. Software calculates the rest of the IP addresses from the localblade and mateblade addresses. These other IP addresses are not provisionable.

Busy an ethernet link

At the Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the Con level.

Con

- 3 Enter the BsyLnk command.

BsyLnk

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .
Con
0 Quit         Unit0  Inact  no       Jam:  Link0:  Link1  BLnk: FC: Appl:
2              Unit1  Act   no       . Act   . Inact .   .   insync .
3
4
5
6
7 BsyLnk
8 RTSLnk
9 SwLnk
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16             BsyLnk:  Manually take a link out of service.
17 Help                Parns: LinkNumber
18 Refresh                LinkNum  - 0 or 1
   mtc
Time 09:13 >

```

The state changes from in-service (.) to manual busy (M)

- 4 This procedure is complete.

Additional information

The BsyLnk command must be issued on the inactive link. The command is rejected on the active link with the following message.

```
BsyLnk 1 - Command rejected. Reason: cannot lock  
active link.
```

Successful completion of the command is indicated with a message similar to the following.

```
BsyLnk 0 - Command passed.
```

Return to service an ethernet link

At the Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the Con level.

Con

- 3 Enter the RTSLnk command.

RTSLnk

```

CallAgent      SYS      CON      APPL      Unit: 0
.              .      LnkCon  .
              M
Con
0 Quit        Unit0  Inact  no   . Act  M Inact  .   .   insync .
2              Unit1  Act   no   . Act  . Inact  .   .   insync .
3
4
5
6
7 BsyLnk
8 RTSLnk
9 SwLnk
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16           RTSLnk:  Manually return to service a link.
17 Help              Parms: LinkNumber
18 Refresh          LinkNum  -  0 or 1
   mtc
Time 09:14 >

```

- 4 This procedure is complete.

Additional information

The RTSLnk command must be issued on a busied link. The command is rejected on an unlocked link with the following message.

```
RTSLnk 1 - Command rejected. Reason: link already
unlocked.
```

Successful completion of the command is indicated with a message similar to the following.

```
RTSLnk 0 - Command passed.
```

This command also clears a major connection alarm that is caused by a manually busied 100BaseT Ethernet link.

Switch ethernet link activity

At the Call Agent Manager

- 1 Enter the CoreMtc level.

CoreMtc

- 2 Enter the Con level.

Con

- 3 Enter the SwLnk command.

SwLnk

```
CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

Con
0 Quit          Unit0  Inact  no      . Act   . Inact .   .   insync .
2              Unit1  Act    no      . Act   . Inact .   .   insync .
3
4
5
6
7 BsyLnk
8 RTSLnk
9 SwLnk
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh      SwLnk:      Switch link activity.
   mtc
Time 12:45 >
```

- 4 This procedure is complete.

Additional information

Successful completion of the command is indicated with a screen similar to the following.

```
CallAgent      SYS      CON      APPL      Unit: 0
.              .              .              .

Con
0 Quit          Unit0  Inact   no      Jam:  Link0:  Link1:  BLnk: FC: Appl:
2              Unit1  Act     no      .      . Inact . Act   .      . insync .
3
4
5
6
7 BsyLnk
8 RTSLnk
9 SwLnk
10
11
12
13 LogQuery
14 Alarm
15 QueryIP
16
17 Help
18 Refresh      SwLnk - Command passed.
   mtc
Time 12:46 >
```

Link0: Link1:
. Inact . Act
. Act . Inact

↑
Link mastership changes.

Change user password

The Call Agent platform software load uses the Linux operating system. Use this procedure to change a user password for access to the Call Agent Manager. Changing a user password for access to the call processing application MAP is described in [User administration](#).

At the maintenance interface

- 1 Become the root user with the **su** command.

Note: Each user can change his or her own password. Root can change any user's password.

- 2 Change the password.

passwd <username>

The passwd command provides two prompts to confirm the new password.

```
[root@10.40.44.67 mtc]# passwd mike
syncing password files before attempting operation
Changing password for user mike
New UNIX password:
Retype new UNIX password:
passwd: all authentication tokens updated successfully
updating backup password files
[root@10.40.44.67 mtc]#
```

- 3 This procedure is complete.

Platform user administration

Perform these procedures to add and remove users from access to the Call Agent platform and consequently, the Call Agent Manager. For call processing application user administration, refer to [User administration](#).

Add a user

At the maintenance interface

- 1 Become the root user by using the **su** command.
- 2 Use the **useradd** command to update the password file.

```
# useradd <username>
```

```
[root@10.40.44.67 mtc]# useradd mike
syncing password files before attempting operation
successfully added user
updating backup password files
[root@10.40.44.67 mtc]#
```

- 3 Create the user's password.

```
# passwd <username>
```

Refer to [Change user password](#) for details.
- 4 This procedure is complete.

Remove a user

The Linux operating system offers two related commands for restricting access. The first command, **userdel**, completely removes the user from the system. The second option locks the user account, preserves the account information, but prevents log ins.

At the maintenance interface

- 1 Become the root user by using the **su** command.
- 2 Delete the user from the password file.

```
# userdel <username>
```

```
[root@10.40.44.67 mtc]# userdel mike
syncing password files before attempting operation
successfully removed user
updating backup password files
[root@10.40.44.67 mtc]#
```

- 3 This procedure is complete.

Lock an account

Use this command to maintain the account information, but prevent user log ins.

At the maintenance interface

- 1 Become the root user by using the **su** command.
- 2 Lock the account.

```
# passwd -l <username>
```

```
[root@10.40.44.67 mtc]# passwd -l mike
syncing password files before attempting operation
Changing password for user mike
Locking password for user mike
rawpasswd: Success
updating backup password files
[root@10.40.44.67 mtc]#
```

- 3 This procedure is complete.

Note: To unlock the account and restore log ins, use the **-u** option to the **passwd** command.

MAP Security and Administration

The call processing application provides the MAP interface. The MAP offers many levels and each level offers access to call processing activities. The command interpreter (CI) level of the MAP is used for most security and administration procedures.

The CI is the first level of the MAP available to the user after logging into the CS 2000 Core Manager as “cmusr.” Many command driven menus are available from this level.

```
CI :  
>
```

Disk administration

Storage for the Call Agent is provided by pair of STORAge Management (STORM) units.

Administration of the storage is completed with the STORM Manager. Refer to *STORAge Management Overview*, NN10024-111 for information.

ATTENTION

Do not modify or manipulate files and volumes through the Call Agent platform shell. Storage and retrieval may be adversely affected.

Use the MAP interface and the commands described in this section for disk, file, and volume administration.

Any files placed within the volume directories from outside the MAP interface must be incorporated into the SOS file system with the DISKUT IMPORT command as soon as possible. Files residing within the SOS volume directories but not registered with the SOS file system may adversely affect volume free space calculations and lead to both service impact and data loss.

Administration of the stored data is available through the call processing application. Three MAP command increments are available for disk administration. Access to these command increments is available from all MAP levels and command increments.

- DISKADM
- DISKUT
- ITOCCI

These disk administration commands are available from all levels of the MAP.

What's new for SN06

The IMPORT command is enhanced to enable multiple and single file imports. The IMPORT command also attempts to set record length and attributes automatically for files, based on the file name. File name

expression matching is also allowed for filtering file names. The syntax for the command follows:

```
IMPORT <volume name> <file name expression> [ BINARY
      <lrecl> | IMAGE <lrecl> | TEXT <lrecl> |
      OVERRIDE | PROMPT | NOPROMPT | VERBOSE ]
```

Note: The syntax for importing image files changed since the SN05 version of this command. In SN05, the order was 1020 IMAGE, for SN06 it is IMAGE 1020.

The correct record lengths for binary files are as follows:

- 1020 for system images
- 128 for PRSM patch files
- LRECL must be between 0 and 32767. Values less than 8192 are recommended.

The LISTVOLS command has been enhanced to allow volume name expression matching. The expression must be enclosed in single quotes.

The SCANF command has been enhanced with additional command arguments to control the sorting of displayed data.

File and volume name expressions

The name expression is a string which specifies the format of the file and volume names. The expression is composed of some of the characters of the intended file/volume names along with special character constructions. The special characters constructions include:

- * - Match any number of characters (including zero) of any type.
- ? - Match exactly one character of any type.
- [ABC...] - Matches one character of those listed between brackets.
"-" within the left and right braces indicates a range for matching. For example, [AFX-Z135-9] would match one character of: A, F, X, Y, Z, 1, 3, 5, 6, 7, 8, or 9

Whenever one or more of the special characters are used, the entire string must be enclosed in single quotes (apostrophes). As a shortcut, a prefix may be supplied as the name expression rather than including the prefix followed by * and enclosed in quotes. The expression is not case sensitive. For examples and more information, type **Q SCANF** at the MAP.

DISKADM

The disk administration level offers the following commands:

- **BSY**

Use this command to prevent access to storage. Use the ALL argument during a STORM upgrade.

Note: If the BSY command fails because of open files, first determine the application with the open file. Then use the ROTATE command at the DIRP level to rotate the application from the current disk device to the other disk device.

- **RTS**

Use this command to re-enable access to storage volumes.

- **DISPLAYDISK (DD)**

Use this command to display information about the disk device. Important items shown are the number of locked volumes and free space available for new volumes. If a new volume is required and more space is needed, use the STORM Manager to modify the size of the filesystem. If "In Error" is returned as the status for "Device communication," investigate trouble from the STORM Manager.

- **CREATEVOL (CV)**

Use this command to create another volume on the device.

- **DELETEVOL (DDV)**

Use this command to delete a volume from the device.

- **DISPLAYVOLS (DV)**

Use this command to display the volumes on the device, the size of the volumes, the number of Image Table of Contents (ITOC) files on each volume, and the volume path for each volume. If "S" is returned for the volume state, investigate trouble from the STORM Manager.

- **EXTENDVOL (EXV)**

Use this command to increase the size of a volume. This command fails if the requested size is not available on the disk device.

- **REINITVOL (RV)**

Use this command to delete all the files in a volume and restore the space from used to available. This command fails if the volume contains load file registered with ITOC or open files.

Examples

The following examples show the syntax for DISKADM commands.

Enter the disk administration level.

```

Example
>DISKADM device
device
is SD00 or SD01

```

Busy all volumes on a device.

```

Example
>BSY ALL

```

Note: Volumes with open files cannot be busied. Use the LISTVOL command in DISKUT to determine the number of open files.

Display the device information.

```

Example
>DV

```

```

Information about disk volumes on device SD00.
Volume      Create      Modify      Size  Vol.  ITOC  Volume
Name And    Date        Date        Mega- No.  Files Path
State      Y/M/D       Y/M/D       bytes
-----
SBA         . 2002/03/08 2002/03/08   400   0     0   /3PC/sd00/sba/
IMAGE      . 2002/03/06 2002/03/06   800   1     1   /3PC/sd00/image/
PERM       . 2001/07/26 2001/07/26   128   2     0   /3PC/sd00/perm/
TEMP       . 2001/11/26 2001/11/26   128   3     0   /3PC/sd00/temp/
IMAGE0     . 2002/03/08 2002/03/08  1024   5     0   /3PC/sd00/image0/
AMA        . 2001/09/25 2001/09/25    63   8     0   /3PC/sd00/ama/

```

Increase the volume size by 50 MB.

```

Example
>EXV IMAGE 50

```

Note: DIRP volumes cannot exceed 63 MB.

Create a volume named TEST with a size of 128 MB.

```

Example
>CV TEST 128

```

Delete a volume.

Example
>DDV TEMP

Note: Volumes with ITOC files or open files cannot be deleted.

DISKUT

The disk utilities level offers many commands. The following list shows frequently used commands:

- **LISTVOLS (LV)**
Use this command to list all the volumes on all the devices. If “SYSB - Volume is system busy” is returned, investigate trouble from the STORM Manager.
- **LISTFL (LF)**
Use this command to list the files on a volume. Before a file name can be used as a parameter to another command, the files must be listed with the LISTFL command.
- **DELETEFL (DDF)**
Use this command to delete a file from a volume.
- **FILEATTR (FA)**
Use this command to query or set file attributes. Under normal Call Agent operation it should not be necessary to change the attributes for a file.
- **IMPORT**
Use this command to import single or multiple call processing application images directly from the native file system into the call processing application file system.
The IMPORT command automatically sets attributes for the imported file based on the following format:
— ‘*.**<type><num>**’ where **<type>** is img, bin, or txt and **<num>** is a one to four digit number expressing the record length in bytes.

If the record length for text files is not specified, it may be necessary to use the FA command to set the length.

- '*.txt<num>.recs<num>' is treated as above, but the second <num> is a one to five digit number expressing the file size in records.
- '*\$LD' files are imported as LRECL 256 BIN
- '*\$PATCH' files are imported as LRECL 128 BIN
- '*_CM' files are imported as LRECL 1020 IMAGE
- '*_MS' files are imported as LRECL 1020 IMAGE

If the volume name is provided as the only argument to the command, the IMPORT command attempts to import any candidate files in the specified directory, but not already in the volume's file table. For example, if SD00IMAGE is the only argument to the IMPORT command, the command applies the file name expression matching patterns above, and attempts to import any files in /3PC/sd00/image that do not already exist in the file table for the SD00IMAGE volume. When importing image files, note that the syntax is IMPORT <volume> <filename> IMAGE 1020 for SN06. In SN05, the syntax was IMPORT <volume> <filename> 1020 IMAGE.

The IMPORT command ignores candidate files that do not match the file name expression matching patterns above, unless the DEFAULT or OVERRIDE arguments are used. If either of these arguments are used, the file type keyword and associated record length in bytes must be specified. A yes or no prompt is provided for each file entry unless the NOPROMPT argument is used.

Examples

The following examples show the syntax for DISKUT commands.

List the volumes with sizes in MB.

Example >LV MB

Volumes found:

NAME	TYPE	TOTAL MBYTES	FREE MBYTES	TOTAL FILES	OPEN FILES	ITOC FILES	LARGEST FREE SEGMENT
SD00IMAGE	STD	1024	229	5	0	0	229
SD00TEMP	STD	256	200	14	0	0	200

List the volumes that begin with SD00 in MB.

Example
>LV SD00 MB

Volumes found matching the prefix SD00:

NAME	TYPE	TOTAL MBYTES	FREE MBYTES	TOTAL FILES	OPEN FILES	ITOC FILES	LARGEST FREE SEGMENT
SD00IMAGE	STD	800	593	2	0	2	593
SD00IMAGE1	STD	800	581	2	0	1	581
SD00TEMP	STD	200	200	3	0	0	200
SD00PAT	STD	100	100	0	0	0	100
SD00AMA0	STD	64	1	131	0	0	1
SD00AMA1	STD	64	0	128	0	0	0
SD00DLOG	STD	64	1	243	0	0	1
SD00JF	STD	64	49	9	0	0	49
SD00SBA	STD	64	64	0	0	0	64
SD00SCRATCH	STD	100	97	42	0	0	97
SD00SMDR	STD	100	0	48	0	0	0
SD00AMA	STD	300	0	99	0	0	0
SD00OCC1	STD	100	4	159	0	0	4

Total number of volumes matching prefix SD00 : 13.

List all image related volumes with sizes specified in MB.

Example
>LV '*IM*' MB

List SD00TEMP and SD01TEMP.

Example
>LV SD0?TEMP

List the files in the SD00IMAGE volume.

Example
>LF SD00IMAGE

File information for volume SD00IMAGE:
{NOTE: 1 BLOCK = 512 BYTES }

FILE NAME	O R I O O V R E T P L L G C O E D D C N	FILE CODE	MAX REC LEN	NUM OF RECORDS IN FILE	FILE SIZE IN BLOCKS	LAST MODIFY DATE
CSNN06BM_CM	I F		0 1020	195133	388742	011129
.ITOC	O F		0 1024	1	2	020307
CSNN06AY_CM	I F		0 1020	213853	426036	011213

Note: Sorting options are available for the LF command. Type Q LF for sorting options.

Change the file attributes of a text file to indicate the number of lines in the file.

Example

```
>FA fname.txt SET TEXT_SIZE num
```

fname.txt

is a text file name like `commands.txt`

num

is an integer value less than 65535 and indicates the number of lines in the text file. Use the UNIX word count command, `wc`, with the lines option, `-l (ell)`, to determine the number of lines in a text file.

Note: Nortel Networks does not support changing attributes on image files.

Import a call processing application image file from `/3PC/sd00/image` into SD00IMAGE. If `fname` ends in `_MS` or `_CM`, specifying the 1020 and IMAGE arguments is unnecessary.

Example

```
>IMPORT SD00IMAGE fname IMAGE 1020
```

fname

is the name of the call processing application image file in the native file system

Note: For SN06, use “IMAGE 1020” when importing images. The order is reversed from SN05 when the order was “1020 IMAGE.”

Import all files in the `/3PC/sd00/pmloads` directory into the SD00PMLOADS volume for which the file attributes can be identified and do not already exist in the SD00PMLOADS volume file table.

Example

```
>IMPORT SD00PMLOADS
```

Import a single text file named `ci_script` from the `/3PC/sd01/temp` directory into the SD01TEMP volume.

Example

```
>IMPORT SD01TEMP CI_SCRIPT TEXT 120
```

Import all load files in the /3PC/sd00/temp directory into the SD00TEMP volume.

Example

```
>IMPORT SD00TEMP '*LD'
```

Import all file candidates in the /3PC/sd01/perm directory into the SD01PERM volume. Files without a file name extension receive a binary type and a record length of 1024 bytes.

Example

```
>IMPORT SD01PERM '*' BIN 1024
```

ITOC CI

The image table of contents command interpreter (ITOC CI) level offers the following commands:

- **LISTBOOTFILE (LBF)**
Use this command to display the locations and names of files with image file attributes.
- **SETBOOTFILE (SBF)**
Use this command with the ALR option to set a file for automatic loading.
- **CLEARBOOTFILE (CBF)**
Use this command to clear the ITOC. This command accepts file names or volume names as arguments. Using file names is the recommended method to prevent loss of data.
- **SETALR (SA)**
Use this command to set the automatic load option for a file.

Examples

The following examples show the syntax for ITOC CI commands.

Note: If the CS 2000 - Compact is equipped with Message Controller cards, these commands apply to the Message Switch software loads as well. When used for Message Switch loads, the commands use the MS argument instead of the CM argument.

List the boot files.

Example
>LBF CM

```
Image Table Of Contents:
  A Registered          Generic Device      File
  L Date              Time                Name
  R MM/DD/YYYY HH:MM:SS
-----
0 * 03/07/2003 21:43:01 SD00IMAGE2        CSNN06BI_CM
```

Enter an additional file to the ITOC.

Example
>SBF CM CSNN03BM_CM 1

```
Image Table Of Contents:
  A Registered          Generic Device      File
  L Date              Time                Name
  R MM/DD/YYYY HH:MM:SS
-----
0 * 03/07/2003 21:43:01 SD00IMAGE2        CSNN06BI_CM
1  03/11/2003 13:18:34 SD00IMAGE        CSNN06BM_CM
```

Clear a file from the ITOC.

Example
>CBF CM FILE CSNN03BM_CM

Set the automatic load option for a file.

Example
>SA CM CSNN03BM_CM

All levels

The following disk administration-related commands are available at all levels of the MAP:

- **SCANF**

Use this command to list files, copy files, and delete files.

The SORT argument to this command accepts five possible arguments:

- NAME or BY_NAME to sort alphabetically
- CDATE or BY_CREATE_DATE to sort by creation date
- MDATE or BY_MODIFY_DATE to sort by last modified date
- SIZE or BY_SIZE to sort by file size in blocks
- REV or REVERSE to reverse the order of sorting by NAME, CDATE, MDATE, or SIZE

The SCANF command also accepts a GLOBAL (GS) argument to display the file entries in a single list rather than separate lists based on a volume basis. This argument applies to BRIEF or FULL only.

- **COPY**

Examples

The following examples show the command syntax.

List the files on SD00IMAGE

Example
>SCANF SD00IMAGE

File Index, Generation	Size In Records	File Attribute	Record Length	File Name
(0000 0000)	194678recs	-f-i---	1020b	CSNN04BM
(0001 0000)	1recs	rf---n-	1024b	.ITOC
(0002 0000)	194938recs	-f-i---	1020b	CSNN04AY
(0003 0000)	189998recs	-f-i---	1020b	CSNN03BM

Delete all the files on SD00TEMP.

Example
>SCANF SD00TEMP DELETE NOPROMPT

Note: Deleted files cannot be recovered after deletion.

List all the files in the store file device (SFDEV).

Example
>SCANF SFDEV

Copy a file named BACK14AMA_01 to a file named BACK14AMA_01 and store it on SD01TEMP.

Example
>COPY BACK14AMA_01 BACK14AMA_01 SD01TEMP

List CM image files, sorted by creation date.

Example
>SCANF '*IM*' NAME '*_CM' SORT CDATE GS

List all patch files on all TEMP volumes sorted in reverse order.

Example
>SCANF '*TEMP' NAME '*\$PATCH' SORT NAME REV

List all non DIRP segment files on DLOG volumes.

Example
>SCANF '*DLG*' NOTNAME 'D*' SORT MDATE GS

User administration

User administration allows for adding, deleting, and forcing users off the switch.

Add a user

The **PERMIT** command has different password restrictions based on enhanced password datafill. The command may request the password and options on different command lines.

At the MAP terminal

- 1 Permit the new user.

```
>PERMIT username password 4500 ENGLISH ALL
```

username

is the system name for the new user

password

is the password

Note: For the full syntax and available options, type HELP PERMIT at a prompt.

- 2 This procedure is complete.

Delete a user

At the MAP terminal

- 1 Delete the user.

```
>UNPERMIT username
```

username

is the system name for the user

- 2 This procedure is complete.

Forceout a user

At the MAP terminal

- 1 Force the user off the switch.

```
>FORCEOUT username
```

username

is the system name for the user

Note 1: The user can reconnect. Use the UNPERMIT command to prevent the user from logging on again.

Note 2: This command requires administrator privilege.

- 2 This procedure is complete.

SAM21 Mgr Security and Administration

The CS 2000 SAM21 Manager manages the hardware and hardware states of the Call Agent.


Call Agent Lock



CAUTION
Possible service interruption
Do not lock the active Call Agent.


The CS 2000 SAM21 Manager client responds to an active Call Agent lock with the prompt shown in figure [Call Agent lock warning](#). Do not click Yes. The inactive Call Agent is located in the other CS 2000 SAM21 Manager shelf and a lock request does not provide a prompt when the Call Agent is inactive.

Call Agent lock warning

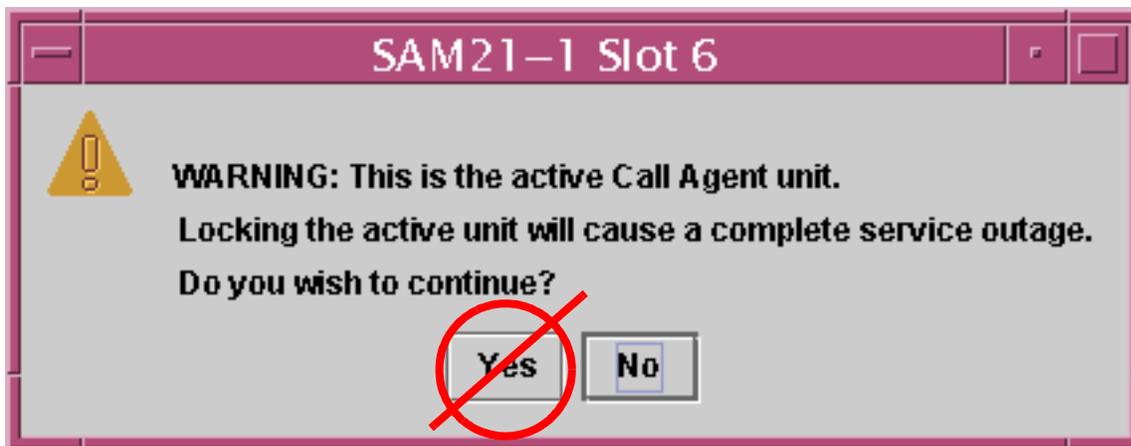

At the CS 2000 SAM21 Manager client

- 1 From the Shelf View, right click on the card and select Lock from the context menu.

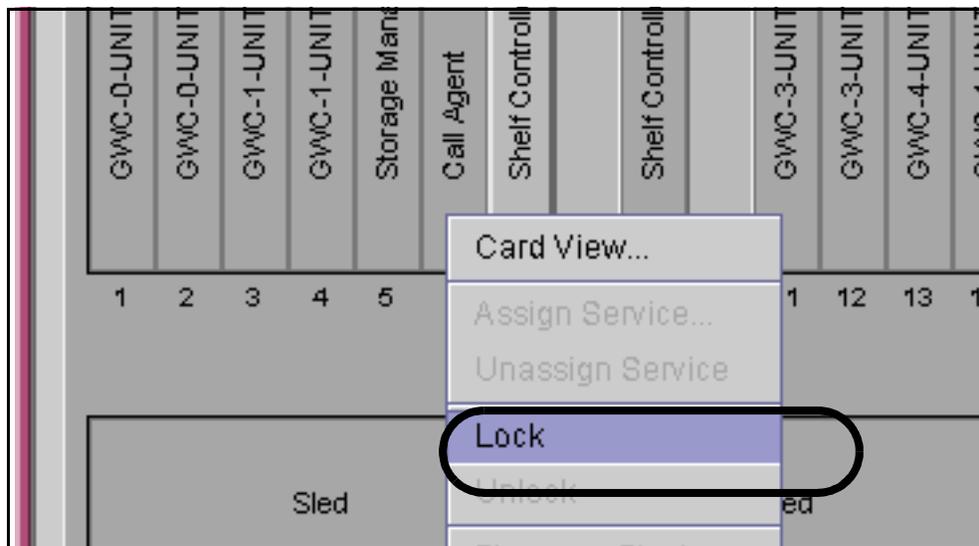


Note: Lock is also available from the States tab of the Card View window.

- 2 Do not confirm a lock warning. The warning is only available for the active Call Agent. Wait for the lock icon to appear on the selected card.
- 3 This procedure is complete.

Call Agent Unlock

At the CS 2000 SAM21 Manager client

- 1 From the Shelf View, right click on the card and select Unlock from the context menu.

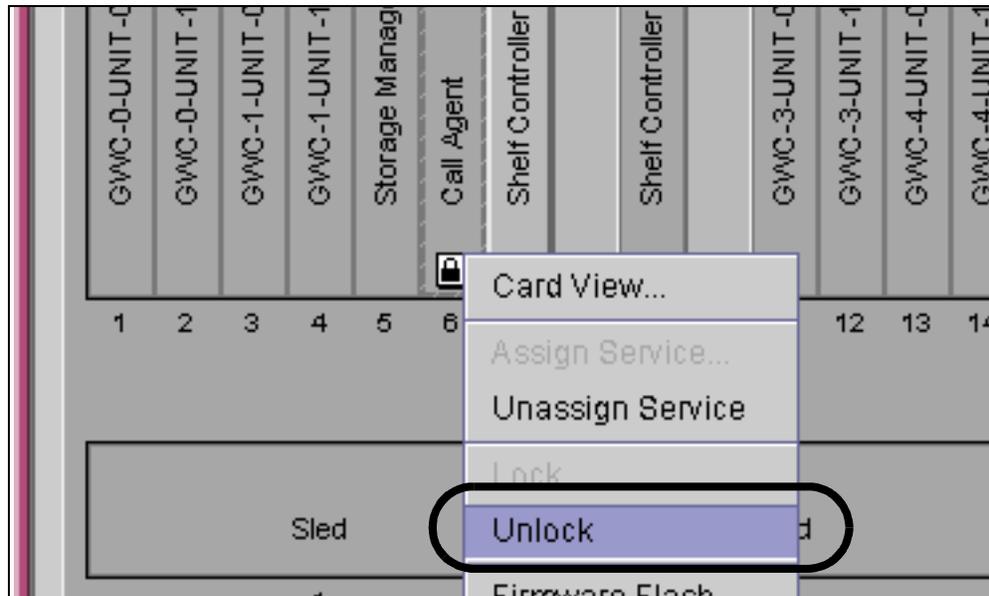

Note: Unlock is also available from the States tab of the Card View window.

The card resets, downloads software, and reboots.

- 2 Wait for the lock icon to disappear.
Note: Do not perform any patching activities on the Call Agent until ten minutes have passed.
- 3 This procedure is complete.

Message controller

Procedures in this section are related to the security and administration of Message Controller cards.

Administration of the Message Controller cards is completed through two user interfaces. The Call Agent Manager provides an interface for viewing alarms, logs, performance statistics, and controlled shutdown of the card. The CS 2000 SAM21 Manager provides a graphical user interface to complete out of service tasks and initial provisioning.

For offices with Message Controllers, management of the Message Switch software is completed through ITOCCI as with the Call Agent. Refer to [Disk administration](#) on page [35](#) for information.

Translate ATM links to the MS

Use this procedure to determine the Message Switch, card, and port number termination for an ATM link from the Message Controller. Use this information to busy the ports on the Message Switch before removing a Message Controller from service or when troubleshooting connectivity problems.

At the Call Agent Manager

- 1 Enter the MCMtc level.

MCMtc

- 2 Translate the ATM links on a Message Controller to the termination on the Message Switch.

Trnsl <mc_no>

mc_no is either 0 or 1

**Example
Trnsl 0**

```

CallAgent      SYS      CON      APPL      MC      Unit: 0
.              .              .              .              .
MCMtc          Blade:   Eth0:      Eth1:      Atm0:    Atm1:
0 Quit        MC0      .          . Act     . Inact   open     open
2             MC1      .          . Act     . Inact   open     open
3
4
5 QryLd
6 QryHits
7 ClrHits
8 Trnsl
9
10
11             Connectivity report for MC0 retrieved on:
12             Fri Apr 4 10:35:47 2003
13 LogQuery
14 Alarm
15                                     Cod  Connection
16                                     MS   Card  Port  Present  Status
17 Help        ATM0 connected to: 0    24   0       NO       GOOD
18 Refresh     ATM1 connected to: 1    25   0       NO       GOOD
   mtc
Time 10:35 > Trnsl 0

```

- 3 This procedure is complete.