

Carrier VoIP

# STORM Security and Administration

Document status: Standard  
Document version: 07.01  
Document date: 20 October 2006

Copyright © 2006, Nortel Networks  
All Rights Reserved.

The information in this document is sourced in Canada, the United States of America, and the United Kingdom.

This is the Way, This is Nortel, Nortel, the Nortel logo, the globemark design, and the NORTEL NETWORKS corporate logo, are trademarks of Nortel Networks. All other trademarks are the property of their respective owners. All rights reserved.

---

# STORM Security and Administration

---

## New in this release

There are no changes in this release.

## Procedures

The security and administration-related procedures in the following table apply to STORage Management (STORM) units.

Procedure	Platform
"Changing the time zone on the STORM server" (page 4)	STORM SAM-XTS and STORM cPCI
"Modifying STORM user passwords" (page 5)	STORM SAM-XTS and STORM cPCI
"Rebooting STORM " (page 8)	STORM SAM-XTS
"Halting STORM " (page 10)	STORM SAM-XTS
"Locking STORM " (page 12)	STORM cPCI
"Unlocking STORM " (page 13)	STORM cPCI
"Retrieving card history" (page 14)	STORM cPCI

**Note 1:** STORM SAM-XTS units are used in STORM Integrated Array (STORM-IA).

**Note 2:** In this document and other STORM documents, STORM -IA refers to the STORM installation that uses two STORM SAM-XTS shelves. STORM SAM-XTS refers to the hardware platform and shelf type.

## Changing the time zone on the STORM server


Use this procedure to change the time zone setting for the STORM unit.

### Changing the time zone on the STORM server

Step	Action
------	--------

*At the STORM Manager client workstation*

- 1 Click on the Admin panel tab.

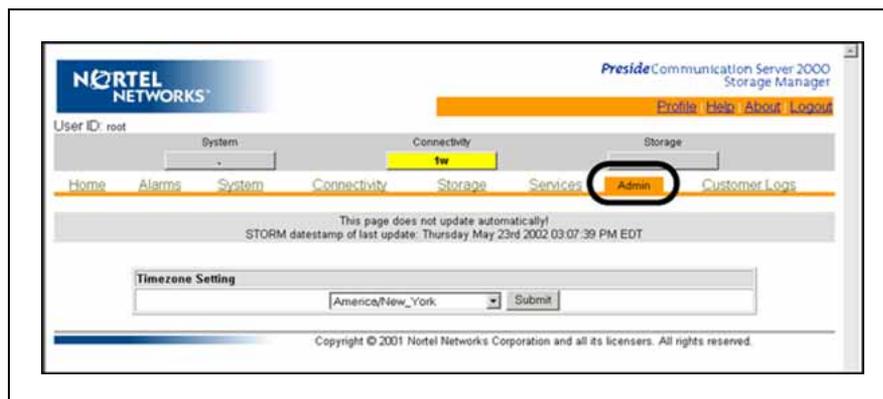

*The STORM Admin panel displays. The display for the STORM SAM-XTS platform is similar. (STORM SAM-XTS units are used in STORM-IA.)*

- 2 Left click on the down arrow in the field under the Timezone Setting category.
- 3 Then drag the scroll bar down and release it when the cursor is positioned over the name of the desired time zone.
- 4 Click the Submit button to enter the new timezone value.
- 5 This procedure is complete.

—End—

## Modifying STORM user passwords

Use this procedure to modify STORM user passwords.


**Note:** If a root password is lost or inadvertently deleted, contact Nortel support personnel for assistance.

### Modifying STORM user passwords


Step	Action
------	--------

*At the STORM Manager client workstation*


- 1 Click on the Profile link in the STORM banner.

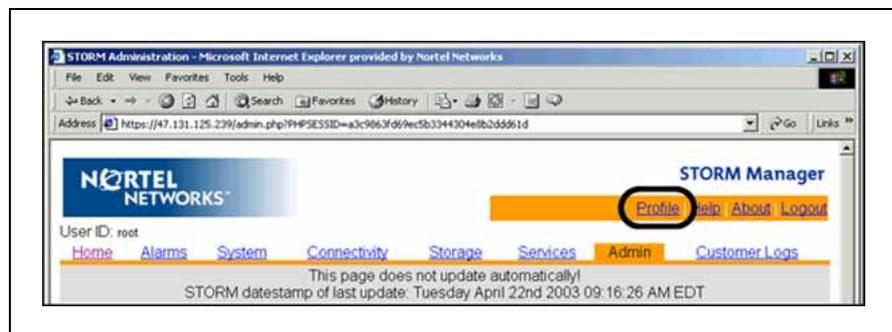

The STORM Root Password Change panel displays.

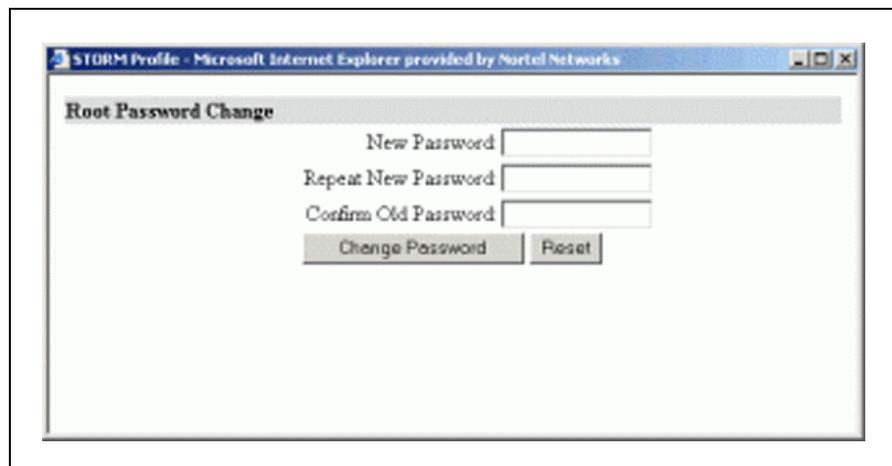

- 2 Enter the same new user password in the New Password and Repeat New Password fields.
- 3 In the Confirm Old Password field, enter the password being replaced.

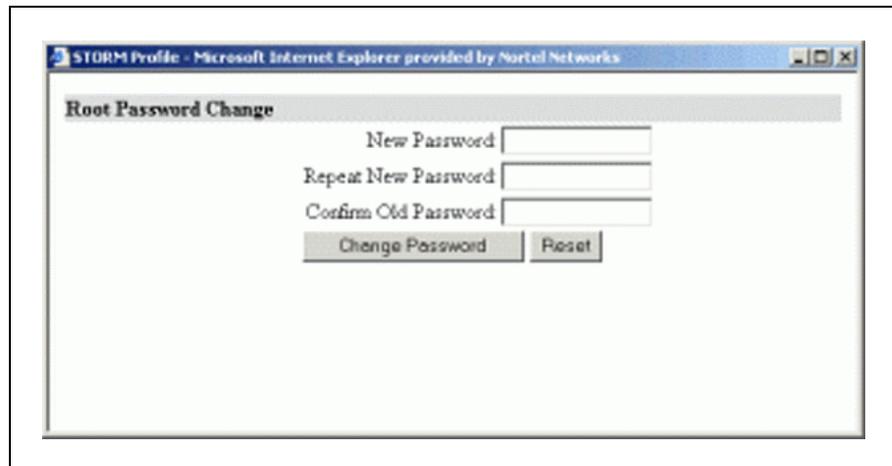

- 4 To enter the new value, click the Change Password button. Or to clear any entries, click the Reset button.
- 5 This procedure is complete.

---

—End—

---

## Limitations and restrictions

Profile information for the STORM card includes the following limitations and restrictions:

- Only a user with root privileges, such as an administrator, is permitted to make password modifications using the Profile panel.
- The STORM unit does not support password aging or password strength checking.
- The new password cannot match the password being replaced.
- The new password cannot match the user ID.
- Do not use the Profile panel to add or delete user IDs.
- Only the first eight characters of the password are significant.
- Passwords are case sensitive. For example, "mypass" and "MyPass" are two different passwords.

## Panel messages

The following system and error messages can appear during use of the Profile panel:

STORM ERROR: did not enter correct password.

The root user did enter the current STORM password correctly.

STORM ERROR: did not enter old password.

The root user neglected to enter the current STORM password.

STORM ERROR: did not enter userid to change.

The root user did not enter a userid.

STORM ERROR: must enter new password twice.

The root user did not enter the new password twice, which is required in both the New Password and Repeat New Password fields.

STORM ERROR: new password cannot be the same as the current password.

The root user entered a new password that is identical to the password being replaced.

STORM ERROR: new password was not entered the same twice.

The root user entered the new password twice, but the entries do not match.

STORM ERROR: password and userid cannot be the same.

The root user entered a password that matches the user ID. Passwords and user IDs cannot be the same.

STORM ERROR: password could not be changed.

The STORM card could not process the password change request. Contact Nortel support for assistance.

STORM Info: password changed successfully.

The root user successfully completed the password change procedure.

## Rebooting STORM

Nortel expects a reboot of a STORM SAM-XTS unit to take less than three minutes.



### CAUTION


Perform this procedure at the direction of Nortel support personnel. Any client machines not prepared for the STORM reboot may stop providing service.

## Rebooting STORM

### Step Action


#### *At the STORM Manager client workstation*

- 1 Click on the Admin panel tab.
- 2 Scroll to the bottom of the page and click the Reboot button.

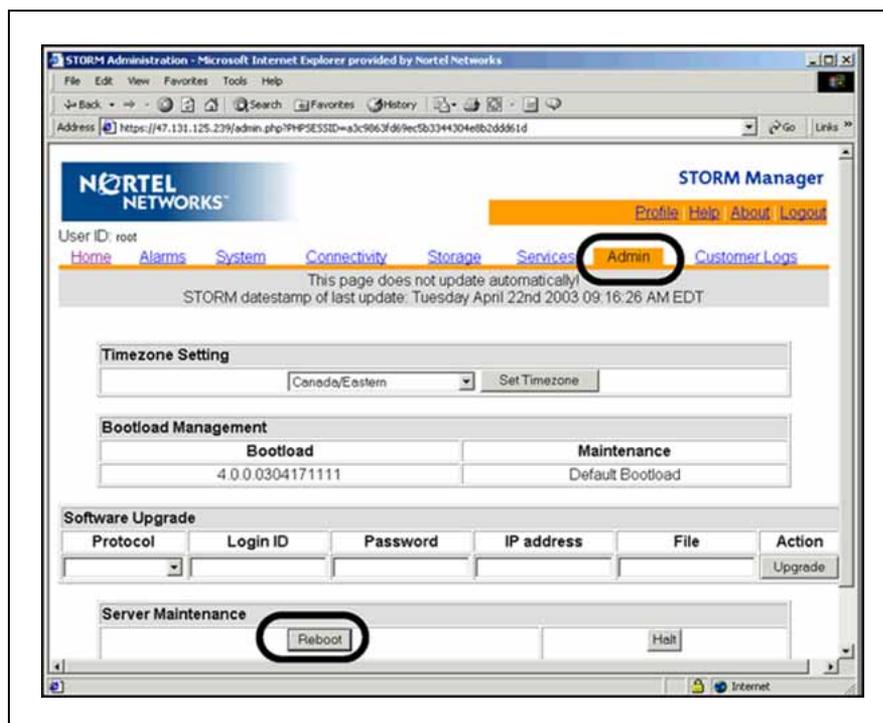

*A warning dialog window opens.*

- 3 Confirm the warning dialog.

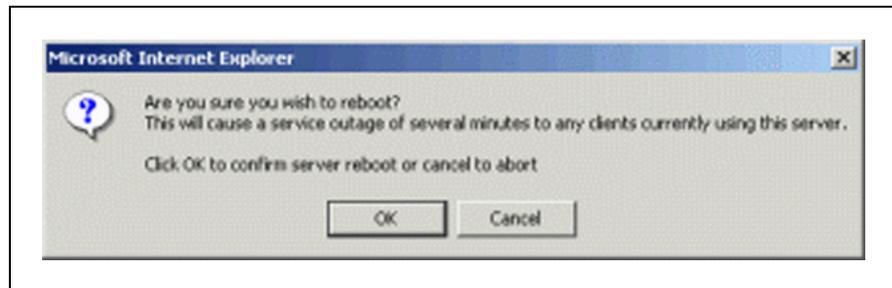

*Wait for the unit to reset and log in to the STORM Manager again.*

- 4 This procedure is complete.

---

—End—

---

### Additional information

If the upgrade CD-ROM is left in the CD-ROM tray after an upgrade, the STORM unit will boot from the CD-ROM, but not reinstall the software load. However, the STORM unit will load the software on the CD-ROM and use that software load rather than the software load installed on the hard disks.

## Halting STORM



### CAUTION


Perform this procedure at the direction of Nortel support personnel. Any client machines not prepared for the STORM halt may stop providing service.

## Halting STORM

Step	Action
------	--------


*At the STORM Manager client workstation*

- 1 Click on the Admin panel tab.
- 2 Scroll to the bottom of the page and click the Halt button.

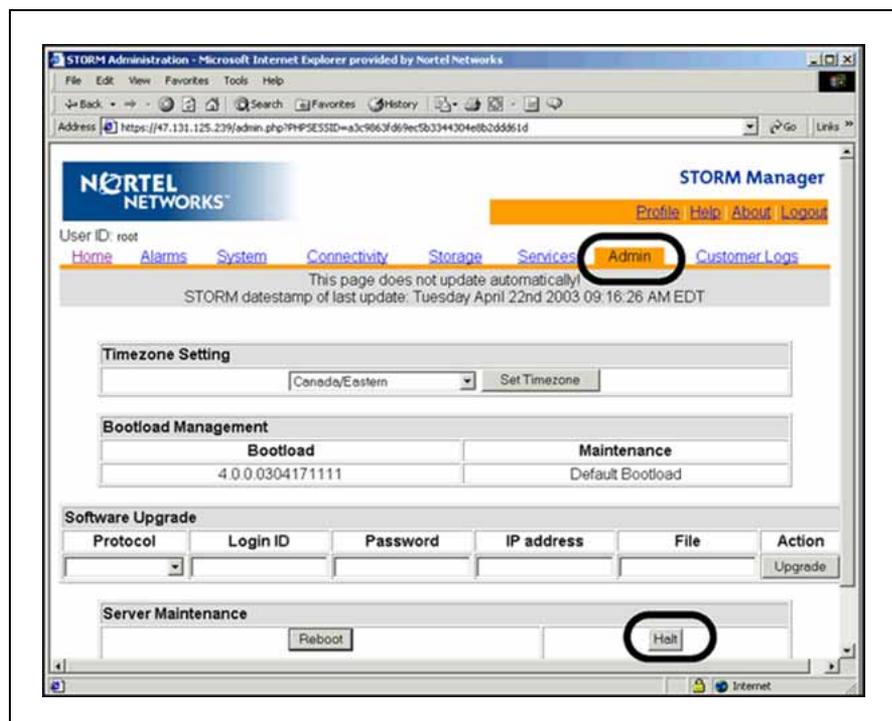

*A warning dialog window opens.*

- 3 Confirm the warning dialog.

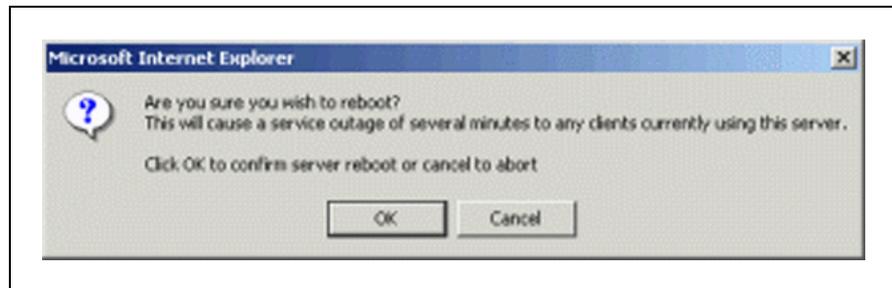

*The unit shuts down and requires personnel to access the frame to start it again.*

- 4 This procedure is complete.

---

—End—

---

## Locking STORM


This procedure stops all execution on the card and prepares the card for a restart. To restart the card, perform this procedure and Unlock.

### Locking STORM

Step	Action
------	--------

*At the CS 2000 SAM21 Manager client workstation*

- 1 Right-click on the Shelf View and click on Lock.

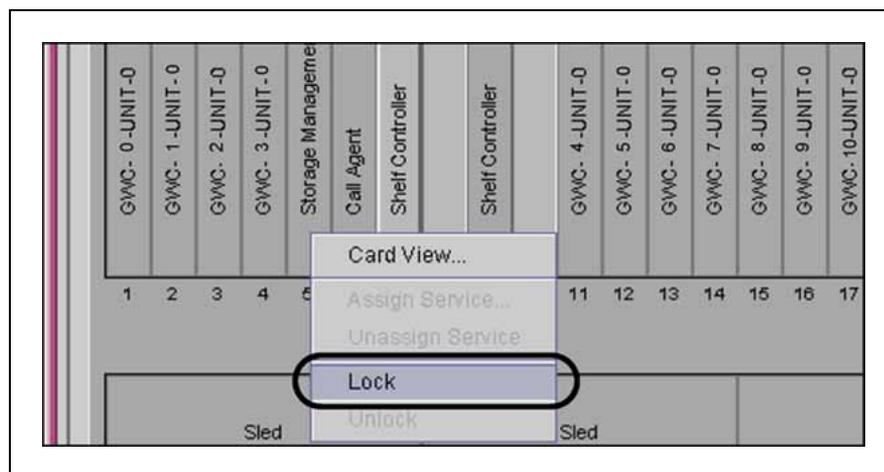

- 2 Wait for the lock icon to appear on the card.
- 3 This procedure is complete.

—End—

## Unlocking STORM


This procedure begins the booting process on the card.

### Unlocking STORM

Step	Action
------	--------

*At the CS 2000 SAM21 Manager client workstation*

- 1 Right-click on the Shelf View and click on Unlock.

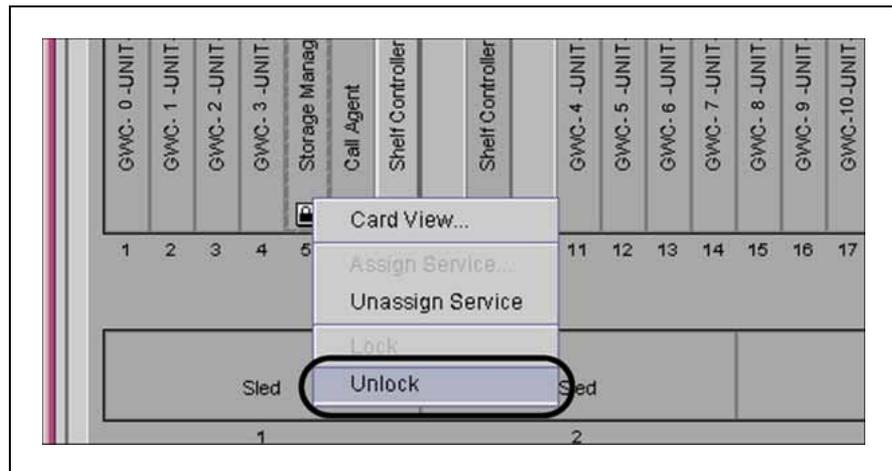

- 2 Wait for the lock icon to disappear from the card.
- 3 This procedure is complete.

—End—


## Retrieving card history

### Retrieving card history


Step	Action
------	--------

*At the CS 2000 SAM21 Manager client workstation*

- 1 Right-click on the card and click on Card View.

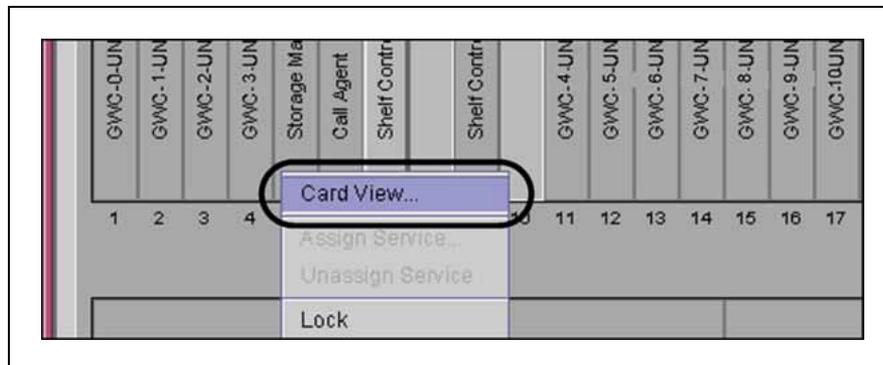

- 2 Click the States tab from the Card View window.

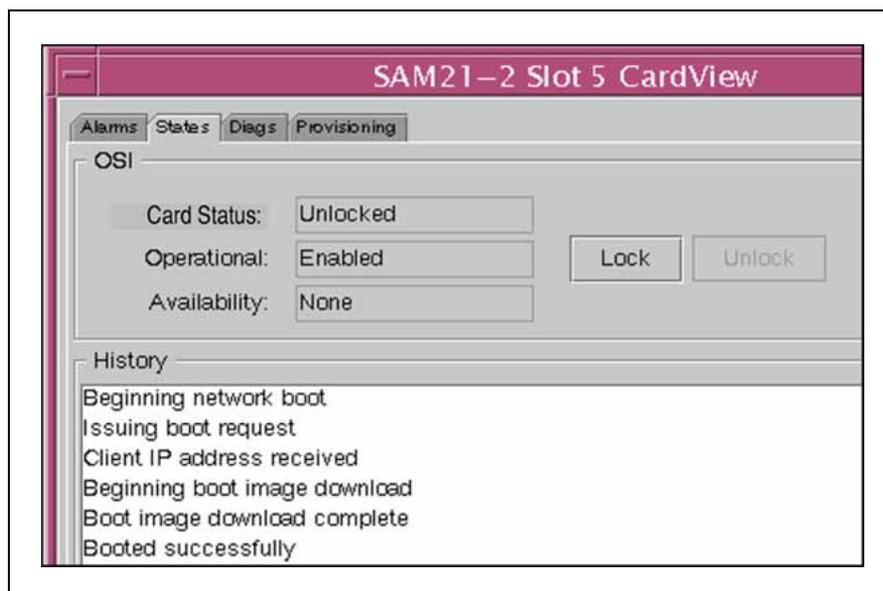

- 3 This procedure is complete.

—End—

## Viewing the status of the fiber channel link and remote hosts

Use this procedure to view the status of the fiber channel link and the remote hosts.

Refer to section "Panel descriptions" in the STORM Connectivity panel module for descriptive information.

### Viewing the status of the fiber channel link and remote hosts

Step	Action
------	--------

*At your workstation or PC*

- 1 From the STORM GUI display, click on the "Connectivity" link.  
*The STORM Connectivity panel displays.*

The screenshot displays the STORM Connectivity panel. At the top, it shows the Nortel Networks logo and the title "Preside Communication Server 2000 Storage Manager". Below this, there are navigation tabs for "System", "Connectivity", and "Storage". The "Connectivity" tab is currently selected. A secondary set of navigation tabs includes "Home", "Alarms", "System", "Connectivity", "Storage", "Services", "Admin", and "Customer Logs". A message states: "This page does not update automatically! STORM datestamp of last update: Friday February 15th 2002 06:03:54 PM".

The main content area is divided into two sections:

- Fibre Channel Status:** A table with two columns: "Link Status" and "Disk Status". The "Link Status" cell contains the text "Up".
- Remote Host Information:** A section with the text "No hosts currently monitored. The form below may be used to add new hosts to monitor." Below this is a form titled "Add Remote Host Monitor" with input fields for "Host:", "Ping Interval:" (set to 100000), and "Ping Timeout:" (set to 100000). There are "Start" and "Reset" buttons at the bottom of the form.

At the bottom of the page, there is a copyright notice: "Copyright © 2001 Nortel Networks Corporation and all its licensors. All rights reserved."

- 2 Continue to one of the following procedures, as needed, to make modifications to the STORM Connectivity panel:
  - Adding or starting a remote host monitor
  - Deleting or stopping a remote host monitor
  - Modifying remote host monitor parameters

3 This procedure is complete.

---

—End—

---



Carrier VoIP

## STORM Security and Administration

Copyright © 2006, Nortel Networks  
All Rights Reserved.

Publication: NN10176-611  
Document status: Standard  
Document version: 07.01  
Document date: 20 October 2006

To provide feedback or report a problem in this document, go to [www.nortel.com/documentfeedback](http://www.nortel.com/documentfeedback).

The information in this document is sourced in Canada, the United States of America, and the United Kingdom.

The information contained herein is the property of Nortel Networks and is strictly confidential. Except as expressly authorized in writing by Nortel Networks, the holder shall keep all information contained herein confidential, shall disclose it only to its employees with a need to know, and shall protect it, in whole or in part, from disclosure and dissemination to third parties with the same degree of care it uses to protect its own confidential information, but with no less than reasonable care. Except as expressly authorized in writing by Nortel Networks, the holder is granted no rights to use the information contained herein.

This is the Way, This is Nortel, Nortel, the Nortel logo, the globemark design, and the NORTEL NETWORKS corporate logo, are trademarks of Nortel Networks. All other trademarks are the property of their respective owners. All rights reserved.

