

>THIS IS **THE WAY**

>THIS IS **NORTEL**

Nortel Multiservice Switch 7400/15000/20000

Operations: Inverse Multiplexing for ATM

NN10600-730

Document status: Standard
Document issue: 7.1S1
Document date: October 2005
Product release: PCR7.1 and up
Job function: Operations
Type: NTP
Language type: U.S. English

Copyright © 2005 Nortel.
All Rights Reserved.

NORTEL, the globemark design, and the NORTEL corporate logo are trademarks of Nortel.



Contents

| | |
|--|-----------|
| What's new | 6 |
| Multiservice Switch 7400 2-port STM-1 optical channelized CES/ATM/IMA FP | 6 |
| Multiservice Switch 7400 8-port DS1/E1 Multi-Service Access FP | 7 |
| IMA configuration | 9 |
| Configuring the FP supporting the IMA feature | 12 |
| Configuring the ports, IMA link groups, and independent links | 14 |
| Configuring the ATM interface and linking it to an IMA link group or an independent link | 21 |
| Upgrading an existing IMA link group to the 8-port DS1/E1 ATM FPs | 23 |
| Re-configuring the IMA software features list | 25 |
| IMA feature monitoring | 26 |
| Locking and unlocking a port component | 27 |
| Locking and unlocking an <i>Ima</i> component | 30 |
| Performing a manual test on the <i>Ima</i> component | 33 |
| Monitoring the status of the IMA application | 40 |
| Determining the status of an IMA link | 42 |
| Determining the status of all links in an IMA group based on statistical attributes | 44 |
| Determining the cause of the most recent OIF anomaly | 46 |
| Determining the number of one-second intervals in which idle cells were received | 48 |
| Determining if the IMA group is active | 50 |
| Determining the active and failed links in an IMA group | 53 |
| Determining which links in the IMA group are currently active and configured at the remote end | 56 |
| Determining the throughput available over an IMA group | 59 |
| Determining the current cell utilization of an IMA group | 61 |
| Monitoring relative link delays | 63 |
| Determining remote link configuration | 65 |
| Determining if the IMA group provides adequate bandwidth | 67 |
| Troubleshooting IMA | 68 |
| Multiservice Switch alarms | 68 |
| IMA-specific alarms | 69 |
| IMA group alarms | 70 |



- IMA link alarms 71
 - Link alarms for the ATM Forum IMA protocol 71
- The troubleshooting process 71
- Tools for troubleshooting IMA 71
- Troubleshooting using Nortel Multiservice Data Manager 72
- Handling problems 72

IMA conceptual overview 80

- What is IMA? 80
- How does IMA work? 81
- Network implementations of IMA 81
- Terminology specific to IMA 83
- Supported ATM features and services 83
- Function processors supporting IMA 85
- IMA link groups and independent links 85
 - Provisioning configurations for the 8-port DS1/E1 ATM function processors 86
 - Provisioning configurations for the 32-port DS1/E1 Multiservice Access function processors 86
 - Provisioning configurations for the 8-port DS1/E1 Multiservice Access function processors 87
 - Provisioning configurations for the 4-port DS3Ch ATM function processor 88
 - Provisioning configurations for the 2-port STM-1 electrical channelized CES/ATM/IMA function processor 88
 - Provisioning configurations for the 2-port STM-1 optical channelized CES/ATM/IMA function processor 88
- IMA protocols 89
 - Applicability 89
 - ATM Forum IMA protocol 89
- Bandwidth options using ATM 89
 - IMA link group capacity on the 8-port DS1/E1 ATM FPs 90
 - IMA link group capacity on the 32-port DS1/E1 Multiservice Access FPs 90
 - IMA link group capacity on the 8-port DS1/E1 Multiservice Access FPs 91
 - IMA link group capacity on the 4-port DS3Ch ATM FP 91
 - IMA link group capacity on the 2-port STM-1 electrical channelized CES/ATM/IMA FP 91
 - IMA link group capacity on the 2-port STM-1 optical channelized CES/ATM/IMA FP 91

Understanding IMA 92

- IMA in the ATM layer reference model 92
- Cell transport functionality using IMA 94
- IMA framing and control 98
 - ICP cell distribution 99
 - ICP cell contents 100
 - Cell rate decoupling using filler cells 101
- Link capacity within an IMA link group 102



- IMA link states 102
- Internal procedures for IMA link configuration 102
- Adding inactive links to an IMA link group 103
 - After the startup procedure 103
 - When the IMA link group is functioning 103
 - After the link addition and reactivation procedure 104
- Compensating for asynchronous physical links 104
- Transmit clock mode 105
 - Common transmit clock (CTC) mode 107
 - Independent transmit clock (ITC) mode 107
 - Guidelines for transmit clock mode 109
- Compensating for differential delay 109
 - Using cell buffers to maintain link delay synchronization 109
 - Measuring differential delay during IMA link group startup 110
 - Ongoing monitoring of differential delay 110
 - Link selection criteria 111
- ATM IMA service reliability on Multiservice Switch for Succession Networks 112
- ATM IMA service operation after line switchovers on Multiservice Switch 114
- ATM control channel failure on IMA 114
- IMA configuration considerations 114
 - IMA and the ATM interface 115
 - IMA components and configurable attributes for configuring links 115
 - Notes about configuring IMA 118
 - Mixed configurations 119
 - Migrating software releases 123

Multiservice Switch IMA compliance to specification 124



What's new

The following features were added to this document:

- [Multiservice Switch 7400 2-port STM-1 optical channelized CES/ATM/ IMA FP \(page 6\)](#)
- [Multiservice Switch 7400 8-port DS1/E1 Multi-Service Access FP \(page 7\)](#)

Other changes made to this document include the following:

- Added section [ATM IMA service operation after line switchovers on Multiservice Switch \(page 114\)](#) to provide more information on the 2-port STM1Ch FP.

Attention: To ensure that you are using the most current version of an NTP, check the current NTP list in NN10600-000 *Nortel Multiservice Switch 7400/15000/20000 What's New*.

Multiservice Switch 7400 2-port STM-1 optical channelized CES/ATM/ IMA FP

The following sections were added for this feature:

- [Provisioning configurations for the 2-port STM-1 optical channelized CES/ ATM/IMA function processor \(page 88\)](#)
- [IMA link group capacity on the 2-port STM-1 optical channelized CES/ ATM/IMA FP \(page 91\)](#)

The following sections were updated for this feature:

- [Configuring the ports, IMA link groups, and independent links \(page 14\)](#)
- [Configuring the ATM interface and linking it to an IMA link group or an independent link \(page 21\)](#)
- [Locking and unlocking a port component \(page 27\)](#)
- [Locking and unlocking an Ima component \(page 30\)](#)
- [Performing a manual test on the Ima component \(page 33\)](#)



- [Monitoring the status of the IMA application \(page 40\)](#)
- [Determining the status of an IMA link \(page 42\)](#)
- [Determining the status of all links in an IMA group based on statistical attributes \(page 44\)](#)
- [Determining the cause of the most recent OIF anomaly \(page 46\)](#)
- [Determining the number of one-second intervals in which idle cells were received \(page 48\)](#)
- [Determining if the IMA group is active \(page 50\)](#)
- [Determining the active and failed links in an IMA group \(page 53\)](#)
- [Determining which links in the IMA group are currently active and configured at the remote end \(page 56\)](#)
- [Determining the throughput available over an IMA group \(page 59\)](#)
- [Determining the current cell utilization of an IMA group \(page 61\)](#)
- [Monitoring relative link delays \(page 63\)](#)
- [Determining remote link configuration \(page 65\)](#)
- [IMA protocols \(page 89\)](#)
- [Bandwidth options using ATM \(page 89\)](#)
- [Transmit clock mode \(page 105\)](#)
- [Common transmit clock \(CTC\) mode \(page 107\)](#)
- [IMA components and configurable attributes for configuring links \(page 115\)](#)
- [Notes about configuring IMA \(page 118\)](#)

Multiservice Switch 7400 8-port DS1/E1 Multi-Service Access FP

The following sections were added for this feature:

- [Provisioning configurations for the 8-port DS1/E1 Multiservice Access function processors \(page 87\)](#)
- [IMA link group capacity on the 8-port DS1/E1 Multiservice Access FPs \(page 91\)](#)

The following sections were updated for this feature:

- [Prerequisites to IMA configuration \(page 9\)](#)
- [Configuring the ports, IMA link groups, and independent links \(page 14\)](#)
- [Bandwidth options using ATM \(page 89\)](#)
- [ICP cell contents \(page 100\)](#)
- [Transmit clock mode \(page 105\)](#)



- [Common transmit clock \(CTC\) mode \(page 107\)](#)
- [IMA components and configurable attributes for configuring links \(page 115\)](#)
- [Notes about configuring IMA \(page 118\)](#)
- [Mixed configurations \(page 119\)](#)



IMA configuration

Configure IMA on Nortel Multiservice Switch devices, or upgrade IMA groups to the ATM Forum IMA protocol.

Attention: Succession Networks customers must use the templates in 241-6001-011 *Nortel Multiservice Data Manager Fault Management Tools* to configure IMA.

Prerequisites to IMA configuration

- One of the FPs supporting IMA is installed on your Multiservice Switch node. Refer to NN10600-551 *Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference* for information on which FPs support IMA.
- The ports may be configured with independent ATM links or as a mixed configuration containing both independent links and IMA links. For more information about configuring the port components for independent links, see NN10600-710 *Nortel Multiservice Switch 7400/15000/20000 ATM Configuration Management*. Also, see [Mixed configurations \(page 119\)](#).
- The customer equipment cables consisting of the actual physical connections between Multiservice Switch nodes must be in place and properly connected to the termination panel, which is in turn connected to the physical connector ports on the FP. See the following documents for details on the cabling connections for the FPs that run IMA:
 - NN10600-170 *Nortel Multiservice Switch 7400 Hardware Description*
 - NN10600-120 *Nortel Multiservice Switch 15000/20000 Hardware Description*
 - NN10600-175 *Nortel Multiservice Switch 7400 Hardware Installation, Maintenance, and Upgrade*
 - NN10600-130 *Nortel Multiservice Switch 15000/20000 Hardware Installation, Maintenance, and Upgrade*



- You have access to all necessary configuring information. See NN10600-060 *Nortel Multiservice Switch 7400/15000/20000 Component Reference* for information on the configurable attributes for IMA.
- You are aware of the configuration options for ports on the FPs supporting IMA. See NN10600-551 *Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference* for details. For information on configuring trunks for IMA, see NN10600-420 *Nortel Multiservice Switch 7400/15000/20000 Operations: Trunking*.
- The base software has been installed before IMA can be configured. Use the procedures in NN10600-270 *Nortel Multiservice Switch 7400/15000/20000 Software Installation* to install the base software.

Attention: See [IMA protocols \(page 89\)](#) for information regarding Multiservice Switch releases supporting the IMA feature.


- You are aware of the special MSA32 and MSA8 considerations when deploying IMA. See Provisioning configurations for the 32-port DS1/E1 Multiservice Access function processors (page 86) and Provisioning configurations for the 8-port DS1/E1 Multiservice Access function processors (page 87).

IMA configuration procedures

This taskflow shows you the sequence of procedures you perform to configure IMA. To link to any procedure, go to [IMA configuration procedures navigation \(page 11\)](#).



IMA configuration procedures

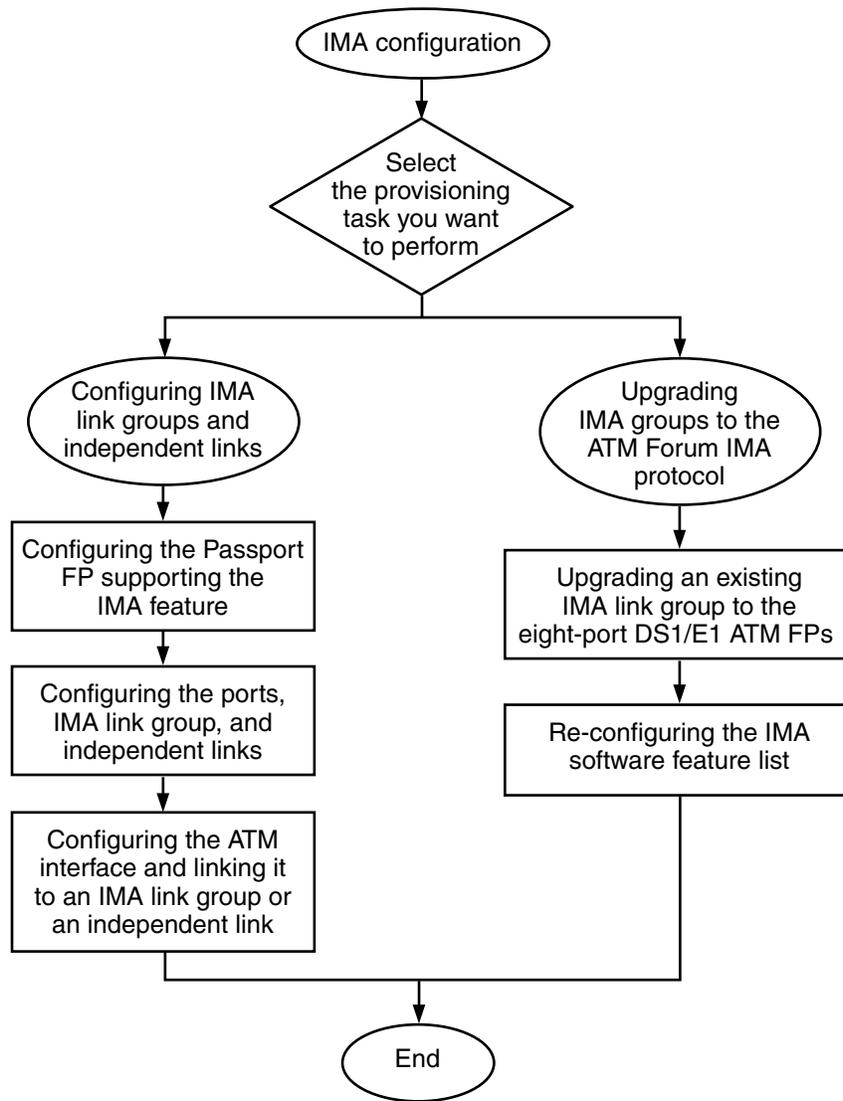

MSS 3450 010 AA

IMA configuration procedures navigation

- [Configuring the FP supporting the IMA feature \(page 12\)](#)
- [Configuring the ports, IMA link groups, and independent links \(page 14\)](#)
- [Configuring the ATM interface and linking it to an IMA link group or an independent link \(page 21\)](#)
- [Upgrading an existing IMA link group to the 8-port DS1/E1 ATM FPs \(page 23\)](#)
- [Re-configuring the IMA software features list \(page 25\)](#)



Configuring the FP supporting the IMA feature

Configure the function processor that will be used to support the IMA feature.

Procedure steps

| Step | Action |
|------|---|
| 1 | Enter configuring mode. start Prov |
| 2 | Configure the FP to run IMA. add Shelf Card/<Card> |
| 3 | Set the <i>cardType</i> attribute. set Shelf Card/<Card> cardType <IMA_FP> |
| 4 | Configure a new logical processor type by adding a <i>LogicalProcessorType</i> (<i>Lpt</i>) component. add Sw Lpt/imaFp |
| 5 | Configure the appropriate features on the <i>Lpt</i> . For a complete list of applications and service combinations on an <i>imaFp</i> , see Nortel Multiservice Switch Release Notes. set Sw Lpt/imaFp featureList <feature> |
| 6 | Add a <i>LogicalProcessor</i> (<i>Lp</i>) component. add Lp/<Lp> |
| 7 | Link the <i>LogicalProcessor</i> to the FP running IMA by setting the <i>mainCard</i> attribute. |

Attention: To facilitate node monitoring and troubleshooting, the instance number of the *Lp* and its associated *Card* component are usually set to the same value.

| | |
|----|--|
| | set Lp/<Lp> mainCard Shelf Card/<Card> |
| 8 | Set the <i>logicalProcessorType</i> attribute of the <i>Lp</i> with the name of the appropriate <i>Lpt</i> component. set Lp/<Lp> Lpt Sw Lpt/imaFp |
| 9 | Perform a semantic check on the configured data. check Prov |
| 10 | Activate the configured data. The editing view becomes the current view when this command is executed. activate Prov |
| 11 | Confirm the activation. |



confirm Prov

--End--

Variable definitions

| Variable | Value |
|-----------|--|
| <Card> | is the instance number of the function processor providing IMA capability. |
| <feature> | is the name of the feature you want to set. |
| <IMA_FP> | is the function processor supporting IMA. To find the values for <IMA_FP> refer to NN10600-551 <i>Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference</i> . |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| | |



Configuring the ports, IMA link groups, and independent links

Configure the ports, IMA link groups and independent links that will be used to support Nortel Multiservice Switch IMA service.

Prerequisites

- The 8-port DS1/E1 ATM FPs, the 32-port DS1/E1 Multiservice Access (MSA) FPs, the 8-port DS1/E1 Multiservice Access (MSA) FPs, the 4-port DS3Ch ATM FPs, and the 2-port STM1 FPs support only the ATM Forum IMA protocol. The ATM Forum IMA protocol is available if you choose the *imaAtmForum* feature. With the exception of the 2-port STM1 FPs, the default setting for all Multiservice Switch FPs supporting IMA is *atmForum10*. For more information, see IMA protocols (page 89).
- You have read the configuration considerations for the 2-port STM-1 optical channelized CES/ATM/IMA FP in NN10600-551 *Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference*, if using 2-port STM-1 optical channelized CES/ATM/IMA FP.
- There is no need to explicitly set the protocol when using a 2-port STM-1 electrical channelized CES/ATM/IMA FP, or a 2-port STM-1 optical channelized CES/ATM/IMA FP, because the ATM IMA protocol 1.1 is automatically provisioned for these FPs.
- The CTC mode is available only on the ATM Forum IMA protocol and is supported by on the 8-port DS1/E1 ATM FPs and the 32-port DS1/E1 MSA FPs.
- If you are using the ATM Forum IMA protocol on the 8-port DS1/E1 ATM FPs or the 32-port DS1/E1 MSA FPs, use CTC mode if all the links in a group use transmit clocking sources derived from the same reference.
- The default value is *itc* for all Multiservice Switch function processors.
- When associating each IMA link with the *Channel (Chan)* subcomponent of a port for Multiservice Switch 7400 nodes, each IMA link must be associated with a DS1 or E1 physical link. No more than one link can be associated with any port. No more than one port can be associated with any link.
- When associating each IMA link with the *Channel (Chan)* subcomponent of a port for Multiservice Switch 15000 and Multiservice Switch 20000 nodes, each IMA link must be associated with one DS1 logical link. An IMA link group under a DS3 port must be linked to a DS1 link under the same DS3 port, it cannot be linked to a DS1 link under another DS3 port. No more than 28 links can be associated with any port. No more than one port can be associated with any link.



Procedure steps

| Step | Action |
|------|---|
| 1 | <p>Add a port to the <i>LogicalProcessor (Lp)</i> component for Multiservice Switch 7400 nodes.</p> <pre>add Lp/<Lp> <port_type>/<port_number></pre> |
| 2 | <p>Add a port to the <i>LogicalProcessor (Lp)</i> component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>add Lp/<Lp_15000> DS3/<DS3_15000> DS1/<DS1_15000></pre> |
| 3 | <p>For the 2-port STM-1 electrical channelized CES/ATM/IMA FPs or the 2-port STM-1 optical channelized CES/ATM/IMA FPs, add the <i>Vc12</i> component.</p> <pre>add Lp/<Lp> sdh/<port_number> vc4/<vc4> vc12/k,l,m</pre> <p>If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>add Laps/<a> vc4/<vc4> vc12/k,l,m</pre> <p><i>E1 Chan/0</i> are automatically created. Within the channel all timeslots except for timeslot 16 are created (default).</p> |
| 4 | <p>For the 2-port STM-1 optical channelized CES/ATM/IMA FPs, add the <i>Cell</i> component.</p> <pre>add Lp/<Lp> sdh/<port_number> vc4/<vc4> vc12/k,l,m E1 Chan/0 Cell</pre> <p>If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>add Laps/<a> vc4/<vc4> vc12/k,l,m E1 Chan/0 Cell</pre> |
| 5 | <p>For the 32-port DS1/E1 Multiservice Access (MSA) FPs, add the <i>AtmCell (Cell)</i> component.</p> <pre>add Lp/<Lp_MSA32> <port_type>/<port_number> Chan/0 Cell</pre> |
| 6 | <p>Add the <i>AtmCell (Cell)</i> component for the 8-port DS1/E1 Multiservice Access (MSA) FP,</p> <pre>add Lp/<Lp_MSA8> <port_type>/<port_number> Chan/0 Cell</pre> |
| 7 | <p>Set the timeslots under the Channel (<i>Chan</i>) component for the 32-port DS1 MSA FP.</p> <pre>set Lp/<Lp_MSA32> DS1/<port_number> Chan/0 timeslots ! 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24</pre> |
| 8 | <p>Set the timeslots under the Channel (<i>Chan</i>) component for the 8-port DS1 MSA FP.</p> <pre>set Lp/<Lp_MSA8> DS1/<port_number> Chan/0 timeslots ! 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24</pre> |



- 9 Set the timeslots under the Channel (*Chan*) component for the 32-port E1 MSA FP.

```
set Lp/<Lp_MSA32> E1/<port_number> Chan/0 timeslots ! 1
2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22
23 24 25 26 27 28 29 30 31
```

- 10 Set the timeslots under the Channel (*Chan*) component for the 8-port E1 MSA FP.

```
set Lp/<Lp_MSA8> E1/<port_number> Chan/0 timeslots ! 1 2
3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
24 25 26 27 28 29 30 31
```

- 11 Add an IMA link group to the *Lp* component for Multiservice Switch 7400 nodes.

```
add Lp/<Lp> Ima/<Ima>
```

If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

```
add Laps/<a> Ima/<Ima>
```

- 12 Add an IMA link group to the *Lp* component, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

```
add Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>
```

- 13 Add a *Link* (*Lk*) component to the IMA link group, for Multiservice Switch 7400 nodes.

```
add Lp/<Lp> Ima/<Ima> Lk/<Lk>
```

If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

```
add Laps/<a> Ima/<Ima> Lk/<Lk>
```

- 14 Add a link (*Link* (*Lk*) component) to the IMA link group, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes

```
add Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/
<Lk_15000>
```

- 15 Associate each IMA link with the *Channel* (*Chan*) subcomponent of a port, for Multiservice Switch 7400 nodes. Channel 0 is recommended even though other values are allowed. Repeat the command for each IMA link.

```
set Lp/<Lp> Ima/<Ima> Lk/<Lk> interfaceName Lp/<Lp>
<port_type>/<port_number> Chan/0
```

For an STM-1 optical channelized CES/ATM/IMA FP, use the following command:

```
set Lp/<Lp> Ima/<Ima> Lk/<Lk> interfaceName Lp/<Lp> sdh/
<sdh> vc4/<vc4> vc12/k,l,m <port_type>/<port_number>
Chan/0
```



If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

```
set Laps/<Lp> Ima/<Ima> Lk/<Lk> interfaceName Laps/<a>  
vc4/<vc4> vc12/k,l,m <port_type>/<port_number> Chan/0
```

- 16 Associate each IMA link with the *Channel (Chan)* subcomponent of a port, for For Multiservice Switch 15000 and Multiservice Switch 20000 nodes. Channel 0 is recommended even though other values are allowed. Repeat the command for each IMA link.

```
set Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/  
<Lk> interfaceName Lp/<Lp_15000> DS3/<DS3> DS1/<DS1>  
chan/0
```

- 17 Set the IMA *protocol* attribute for Multiservice Switch 7400 nodes.

```
set Lp/<Lp> Ima/<Ima> protocol <type>
```

Attention: The above step is not required for the STM-1e channelized CES/ATM/IMA FP or the STM-1 optical channelized CES/ATM/IMA FP, since the ATM Forum IMA protocol 1.1 is automatically provisioned when the IMA group is added on this FP.

- 18 Set the IMA *protocol* attribute for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

```
set Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>  
protocol atmForum10
```

- 19 Set the IMA *transmitClockMode* attribute for Multiservice Switch 7400 nodes.

```
set Lp/<Lp> Ima/<Ima> transmitClockMode <mode>
```

If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

```
add Laps/<a> Ima/<Ima> transmitClockMode <mode>
```

- 20 Set the IMA *transmitClockMode* attribute for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

```
set Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>  
transmitClockMode <mode_15000>
```

- 21 Optionally, set the IMA link group attributes as required for Multiservice Switch 7400 nodes.

```
set Lp/<Lp> Ima/<Ima> <Ima_attribute> <attribute_value>
```

If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

```
add Laps/<a> Ima/<Ima> <Ima_attribute> <attribute_value>
```

- 22 Optionally, set the IMA link group attributes as required for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.



```
set Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>  
<Ima_attribute> <attribute_value>
```

--End--

Variable definitions

| Variable | Value |
|-------------------|---|
| <a> | is the instance number of the <i>Laps</i> component. |
| <attribute value> | is the value of the <i>Ima</i> component attribute |
| <DS1_15000> | is the instance number of the DS1 tributary, having a value between 1 and 28 inclusive. |
| <DS3_15000> | is the instance number of the DS3 port, having a value between 0 and 3 inclusive. |
| <Ima> | is the instance number of the IMA link group, having a value of 0 to 7 inclusive for the 8-port DS1/E1 ATM FPs, or a value of 0 to 31 inclusive for the 32-port DS1/E1 MSA FPs. Attention: For the 8-port DS1/E1 ATM FPs, if the <i>perVcQueueInterfaces</i> attribute under an LP's <i>Arc</i> subcomponent is set to a non-zero value, then traffic shaping (per-Vc queuing) is enabled. If traffic shaping is enabled on an LP, then the instances of IMA groups and independent links can have values from 0 to 3. If traffic shaping is disabled, then the instances of IMA link groups and independent links can have values from 0 to 7. |
| <Ima_15000> | is the instance number of the IMA link group, having a value between 0 and 13. |
| <Ima_attribute> | is the name of the <i>Ima</i> component attribute. |

(1 of 3)



| Variable | Value |
|------------|---|
| <Lk> | <p>is the instance number of the link and has a value of 0 to 31 inclusive.</p> <p>For ease of configuring, monitoring and troubleshooting, each link number usually corresponds to the same port number.</p> <p>With the 8-port DS1/E1 ATM FPs, you may configure a total of eight links in an IMA link group. For example, an FP running IMA with a full complement of eight links forming an IMA link group may include links with any combination of identifiers, such as:</p> <ul style="list-style-type: none"> • links 0, 1, 2, 3, 4, 5, 6, 7 or • links 0, 5, 14, 23, 24, 25, 27, 31 <p>With the 32-port DS1/E1 Multiservice FPs, you can configure a total of eight links in an IMA link group, with each link having an instance number between 0 and 15 inclusive. Note that each IMA link group must be associated with a port in the range 0 to 15 inclusive, or the range 16 to 31 inclusive: all ports within an IMA link group must fall within one of these two ranges. An IMA link group can include links 30 and 31 if the link group instance number (<i>Ima</i> component instance number) is in the range 16 to 29.</p> |
| <Lk_15000> | <p>is the instance number of the link and has a value of 0 to 31 inclusive.</p> <p>For ease of configuring, monitoring and troubleshooting, each link number usually corresponds to the same port number.</p> <p>For Multiservice Switch 15000 and Multiservice Switch 20000 4-port DS3Ch ATM FPs, you can configure upwards to a total of 28 links in an IMA link group.</p> |
| <Lp> | <p>is the instance number of the logical processor associated with the function processor providing IMA capability.</p> |
| <Lp_15000> | <p>is the instance number of the logical processor associated with the function processor providing IMA capability.</p> |
| <Lp_MSA8> | <p>is the instance number of the 8-port DS1 or E1 MSA FP providing IMA capability.</p> |
| <Lp_MSA32> | <p>is the instance number of the 32-port DS1 or E1 MSA FP providing IMA capability.</p> <p>Attention: For the 8-port DS1/E1 ATM FP, the 4-port DS3Ch ATM FP, the 2-port STM-1e channelized FP, and the 2-port STM-1 optical channelized FP, a single channel, Chan/0, is automatically created with all available timeslots allocated. Use of Chan/0 (the default value) is recommended even though other values are allowed. These timeslots cannot be changed and only one <i>Channel</i> subcomponent per port is permitted. For the 32-port DS1/E1 MSA FPs, you must configure timeslots under the <i>Channel</i> component. See step 7 for the command used to configure timeslots for the 32-port DS1/E1 MSA FPs.</p> |
| (2 of 3) | |



| Variable | Value |
|---------------|---|
| <mode> | is the clock mode setting. If you have configured the 8-port DS1/E1 ATM FPs, the 32-port DS1/E1 MSA FPs, the 4-port DS3Ch ATM FPs, or the 2-port STM-1 e channelized FPs using the ATM Forum IMA protocol, you can set the mode clock setting as either ctc or itc. |
| <mode_15000> | is the clock mode setting which can have two values: itc for independent transmit clock mode ctc for common transmit clock mode |
| <port_number> | is the instance number of the port. |
| <port_type> | is the port type, either Ds1, E1, or Sdh. To determine the value to enter for the FP you are configuring, see NN10600-551 <i>Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference</i> . |
| <port_number> | is the instance number of the sdh port, and k,l,m are the TUG-3 (values 1 to 3), TUG-4 (values 1 to 7), and TUG-12 (values 1 to 3) respectively. |
| <sdh> | is the instance number of the STM-1 sdh component. |
| <type> | is the IMA protocol. For the 8-port DS1/E1 ATM FPs, 4-port DS3Ch ATM FPs, and the 32-port DS1/E1 ATM FPs, the value is atmForum10. For the 2-port STM-1 FPs, the value is atmForum11. |
| <vc4> | is the instance number of the vc4, having a value of 0. |

(3 of 3)



Configuring the ATM interface and linking it to an IMA link group or an independent link

Configure an ATM interface and link it to a Nortel Multiservice Switch IMA link group or independent link.

Attention: An *AtmIf* component is configured for each ATM interface. It manages the set of ATM connections that terminate or traverse the interface. For more information, see NN10600-700 *Nortel Multiservice Switch 7400/15000/20000 ATM Technology Fundamentals*.

Procedure steps

| Step | Action |
|------|--|
| 1 | Add an ATM interface for each IMA link group, for Multiservice Switch 7400 nodes. add AtmIf/<AtmIf> |
| 2 | Add an ATM interface for each IMA link group, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. add AtmIf/<AtmIf_15000> |
| 3 | Link each IMA link group to an ATM interface, for Multiservice Switch 7400 nodes. set AtmIf/<AtmIf> interfaceName Lp/<Lp> Ima/<Ima> If the STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command: set AtmIf/<AtmIf> interfaceName Laps/<a> Ima/<Ima> |
| 4 | Link each IMA link group to an ATM interface, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. set AtmIf/<AtmIf_15000> interfaceName Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> |
| 5 | Link each independent link to an ATM interface, for Multiservice Switch 7400 nodes. set AtmIf/<AtmIf> interfaceName Lp/<Lp> <port_type>/<port_number> Chan/0 |
| 6 | Link each independent link to an ATM interface, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. set AtmIf/<AtmIf_15000> interfaceName Lp/<Lp_15000> DS3/<DS3_15000> DS1/<DS1_15000> Chan/0 |



--End--

Variable definitions

| Variable | Value |
|---------------|--|
| <a> | is the instance number of the <i>Laps</i> component. |
| <Atmlf> | is the instance of the <i>Atmlf</i> component using a particular IMA link group and it can be any number between 1 and 1 024. |
| <Atmlf_15000> | is the instance of the <i>Atmlf</i> component using a particular IMA link group and it can be any number between 1 and 65 535. |
| <DS3_15000> | is the instance number of the DS3 port, having a value between 0 and 3 inclusive. |
| <Ima> | is the instance number of the IMA link group. The instance numbers of IMA link groups and independent links must be unique in a mixed configuration (The independent link instance number is the same as the <i>DS1</i> or <i>E1</i> subcomponent). |
| <Ima_15000> | is the instance number of the IMA link group, having a value between 0 and 13. The instance numbers of IMA link groups and independent links must be unique in a mixed configuration (The independent link instance number is the same as the <i>DS1</i> or <i>E1</i> subcomponent). |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <port_number> | is the instance number of the port. |
| <port_type> | is the port type, either <i>Ds1</i> , <i>E1</i> , or <i>Sdh</i> . To determine the value to enter for the FP you are configuring, see NN10600-551 <i>Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference</i> . |



Upgrading an existing IMA link group to the 8-port DS1/E1 ATM FPs

Use this optional procedure to upgrade, on the 8-port DS1/E1 ATM FPs, an existing IMA link group from the proprietary IMA protocol to the ATM Forum IMA protocol.

Prerequisites

- Nortel Multiservice Switch software release 5.0 or later is installed on the nodes at both ends of the IMA link group.

Attention: The 32-port Multiservice Access (MSA) FPs and the 4-port DS3Ch ATM FPs support only the ATM Forum protocol. See [IMA protocols \(page 89\)](#) for additional information.

Procedure steps

| Step | Action |
|------|---|
| 1 | Change the setting of the <i>Ima</i> component <i>protocol</i> attribute to <i>atmForum10</i> at both ends of the IMA link group. |

Attention: This step is a component-critical change that causes the IMA link group to go out-of-service during the change-over.

- | | |
|---|--|
| | set Lp/<Lp> Ima/<Ima> protocol atmForum10 |
| 2 | Perform a semantic check on the configured data. check Prov |
| 3 | Save the new view to disk. save Prov |
| 4 | Activate the configured data. activate Prov This IMA link group is now operating with the ATM Forum protocol. |
| 5 | Confirm the activation. confirm Prov |
| 6 | Repeat this procedure for any other IMA link groups on the FP. |
-

--End--



Variable definitions

| Variable | Value |
|----------|--|
| <Ima> | is the instance number of the IMA link group, having a value of 0 to 7 inclusive. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| | |



Re-configuring the IMA software features list

Use this optional procedure to re-configure the IMA software features list when all the IMA link groups on the FP are using the ATM Forum protocol.

Configuring the feature list to use the *imaAtmForum* feature avoids loading unnecessary software on the FP and results in memory savings.

Prerequisites

- Nortel Multiservice Switch software release 5.0 software or later is installed on the nodes at both ends of the IMA link group.
- Other FPs are not using the LPT that you are about to re-configure.

Procedure steps

| Step | Action |
|------|--|
| 1 | Re-configure the IMA feature selected on the LPT at both ends of the IMA link group. <code>set Sw Lpt/imaFp featureList ~ima imaAtmForum</code> |

Attention: When this configured change is activated, the FP is reset to purge unnecessary software from memory.

--End--



IMA feature monitoring

Monitor the condition of your IMA application in Nortel Multiservice Switch systems by setting and interpreting the operational attributes available with IMA components.

Prerequisites to IMA feature monitoring

- You know how to use Nortel Multiservice Data Manager to monitor Multiservice Switch devices and services. For more information, see 241-6001-023 *Nortel Multiservice Data Manager Configuration Tools* and NN10400-300 *Nortel Multiservice Data Manager Administration Tools*.

Navigation

- [Locking and unlocking a port component \(page 27\)](#)
- [Locking and unlocking an Ima component \(page 30\)](#)
- [Performing a manual test on the Ima component \(page 33\)](#)
- [Monitoring the status of the IMA application \(page 40\)](#)
- [Determining the status of an IMA link \(page 42\)](#)
- [Determining the status of all links in an IMA group based on statistical attributes \(page 44\)](#)
- [Determining the cause of the most recent OIF anomaly \(page 46\)](#)
- [Determining the number of one-second intervals in which idle cells were received \(page 48\)](#)
- [Determining if the IMA group is active \(page 50\)](#)
- [Determining the active and failed links in an IMA group \(page 53\)](#)
- [Determining which links in the IMA group are currently active and configured at the remote end \(page 56\)](#)
- [Determining the throughput available over an IMA group \(page 59\)](#)
- [Determining the current cell utilization of an IMA group \(page 61\)](#)
- [Monitoring relative link delays \(page 63\)](#)
- [Determining remote link configuration \(page 65\)](#)



- [Determining if the IMA group provides adequate bandwidth \(page 67\)](#)

Locking and unlocking a port component

Lock a port to temporarily discontinue active service of the component and generate internal diagnostics (self-tests). If the diagnostics pass, the administrative state of the component changes from locked to unlocked and the port or IMA startup procedure is executed. If the diagnostics fail, the component's administrative state remains locked and the test failure result is returned in an alarm.

Prerequisites

- You are aware that if you lock a DS1 or E1 port that is actively part of an IMA link group, and if you have sufficient bandwidth, you will not lose user traffic if you are running the ATM Forum IMA protocol.
- You are aware that if you lock a DS3 port on the 4-port DS3Ch ATM FP, you will lose all independent links and IMA link groups under that DS3 port.

Procedure steps

| Step | Action |
|------|--|
| 1 | <p>Lock a DS1 or E1 port component for Multiservice Switch 7400 nodes.</p> <pre>lock Lp/<Lp> <port_type>/<port_number></pre> <p>For a 2-port STM-1 optical channelized CES/ATM/IMA FP, use the following command:</p> <pre>lock Lp/<Lp> sdh/<sdh> vc4/0 vc12/<k,1,m> E1</pre> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>lock Laps/<Laps> vc4/0 vc12/<k,1,m> E1</pre> |
| 2 | <p>Lock a DS3 port component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>lock Lp/<Lp_15000> DS3/<DS3_15000></pre> |
| 3 | <p>Lock a DS1 tributary component of a channelized DS3 port for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>lock Lp/<Lp_15000> DS3/<DS3_15000> DS1/<DS1_15000></pre> |
| 4 | <p>Unlock a DS1 or E1 port component for Multiservice Switch 7400 nodes.</p> <pre>unlock Lp/<Lp> <port_type>/<port_number></pre> <p>For a 2-port STM-1 optical channelized CES/ATM/IMA FP, use the following command:</p> <pre>unlock Lp/<Lp> sdh/<sdh> vc4/0 vc12/<k,1,m> E1</pre> |



If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

unlock Laps/<Laps> vc4/0 vc12/<k,l,m> E1

- 5 Unlock a DS3 port component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

unlock Lp/<Lp_15000> DS3/<DS3_15000>

- 6 Unlock a DS1 tributary component of a channelized DS3 port for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

unlock Lp/<Lp_15000> DS3/<DS3_15000> DS1/<DS1_15000>

--End--


Variable definitions

| Variable | Value |
|---------------|---|
| <DS1_15000> | is the instance number of the DS1 tributary, value 1-28. |
| <DS3_15000> | is the instance number of the DS3 port, value 0-3. |
| <k,l,m> | is the TUG value, with k = TUG-3 (values 1 to 3), l = TUG-4 (values 1 to 7), and m = TUG-12 (values 1 to 3). |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <port_number> | is the instance number of the port. |
| <port_type> | is the port type, either Ds1 or E1. To determine the value to enter for the FP you are configuring, see NN10600-551 <i>Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference</i> . |
| <sdh> | is the instance number of the STM-1 sdh component. |




Procedure job aid

Port component hierarchy

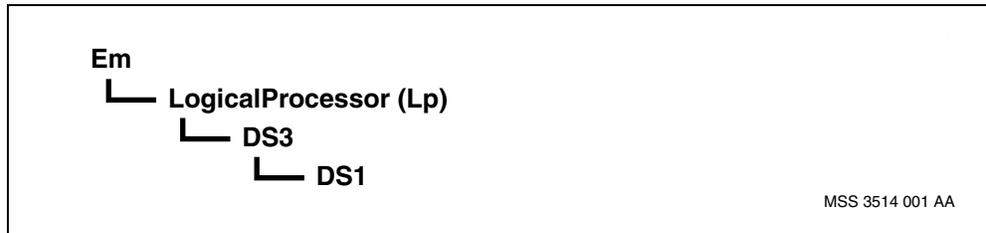

Port component hierarchy, protected mode

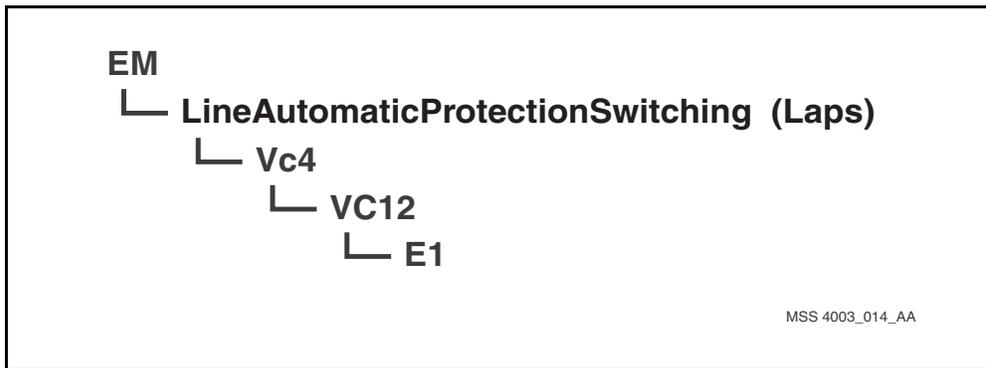



Locking and unlocking an *Ima* component

Lock either an *Ima* component to temporarily discontinue active service of the component and generate internal diagnostics (self-tests). If the diagnostics pass, the administrative state of the component changes from locked to unlocked and the IMA startup procedure is executed. If the diagnostics fail, the component's administrative state remains locked and the test failure result is returned in an alarm.

Procedure steps

| Step | Action |
|------|---|
| 1 | Lock an <i>Ima</i> component for Multiservice Switch 7400 nodes. lock Lp/<Lp> Ima/<Ima> If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command: lock Laps/<Laps> Ima/<Ima> |
| 2 | Lock an <i>Ima</i> component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. lock Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> |
| 3 | Unlock an <i>Ima</i> component for Multiservice Switch 7400 nodes. unlock Lp/<Lp> Ima/<Ima> If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command: unlock Laps/<Laps> Ima/<Ima> |
| 4 | Unlock an <i>Ima</i> component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. unlock Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> |

--End--




Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value between 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group, value of 0-7 inclusive for the 8-port DS1/E1 ATM FPs, or a value of 0-29 inclusive for the 32-port DS1/E1 Multiservice Access (MSA) FPs. On the 2-port STM-1 electrical channelized CES/ATM/IMA FP and 2-port STM-1 optical channelized CES/ATM/IMA FP, the IMA link group values for port 0 should be less or equal to 56, and different than any independent ATMIF E1 number. The port 1 IMA link group number should be greater than 56 and less than or equal to 113, and different than an independent ATMIF E1 number. |
| <Ima_15000> | is the instance number of the IMA link group, having a value between 0 and 13. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

Ima component hierarchy

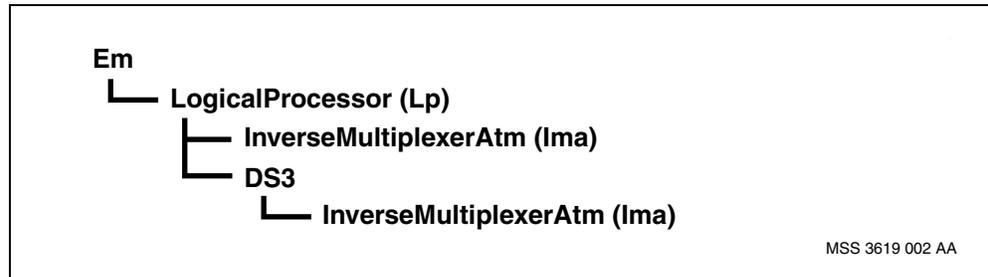

Ima component hierarchy, protected mode

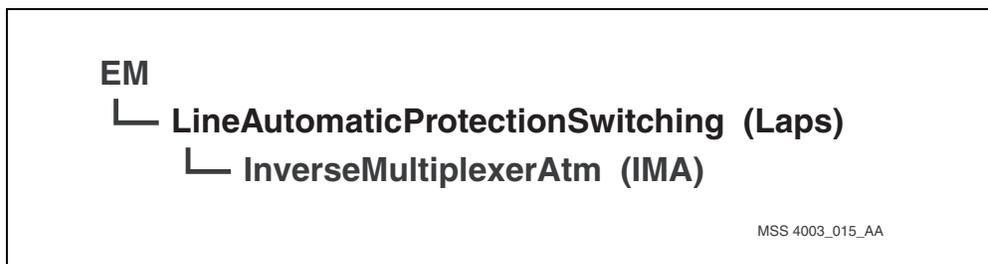



Performing a manual test on the *Ima* component

Perform a manual test on the *Ima* component by externally looping back the transmit signal to the port's receive path. This generates a test pattern at the transmit end of the IMA link group which will be distributed across all active links for transmission. The receive end of the IMA link recombines the data from the active links into a single stream and verifies the results of the transmission.

Prerequisites

- The *type* attribute for ports at the remote end has been set to *externalLoop*, if you are configuring a manual test.
- The duration of the remote-end port test is longer than that configured for the IMA test.
- You are familiar with port tests. For more information, see NN10600-520 *Nortel Multiservice Switch 7400/15000/20000 Fault and Performance Management: Troubleshooting*.

Procedure steps

| Step | Action |
|------|--|
| 1 | Identify the type of test to be executed on the local <i>Ima</i> component for Multiservice Switch 7400 nodes. set Lp/<Lp> Ima/<Ima> Test type manual If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command: set Laps/<Laps> Ima/<Ima> Test type manual |
| 2 | Identify the type of test to be executed on the local <i>Ima</i> component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. set Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Test type manual |
| 3 | Specify the external loop test type on the port at the remote end for a Multiservice Switch 7400 DS1 port. set Lp/<Lp> DS1/<DS1> Test type externalLoop |
| 4 | Specify the external loop test type on the port at the remote end for a Multiservice Switch 7400 E1 port. set Lp/<Lp> E1/<E1> Test type externalLoop If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command: set Laps/<Laps> vc4/0 vc12/<k,l,m> E1 Test type externalLoop |



-
- 5 Specify the external loop test type on the port at the remote end for a Multiservice Switch 7400 Sdh port.
set Lp/<Lp> Sdh/<Sdh> Test type externalLoop
 - 6 Specify the external loop test type on the port at the remote end for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.
set Lp/<Lp_15000> DS3/<DS3_15000> Test type externalLoop
 - 7 If the duration of the remote-end port test is not longer than that configured for the IMA test, set it to a new value, for a Multiservice Switch 7400 DS1 port.
set Lp/<Lp> DS1/<DS1> Test duration <limit>
 - 8 If the duration of the remote-end port test is not longer than that configured for the IMA test, set it to a new value for a Multiservice Switch 7400 E1 port.
set Lp/<Lp> E1/<E1> Test duration <limit>
If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:
set Laps/<Laps> vc4/0 vc12/<k,l,m> E1 Test duration <limit>
 - 9 If the duration of the remote-end port test is not longer than that configured for the IMA test, set it to a new value for a Multiservice Switch 7400 Sdh port.
set Lp/<Lp> Sdh/<Sdh> Test duration <limit>
 - 10 If the duration of the remote-end port test is not longer than that configured for the IMA test, set it to a new value for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.
set Lp/<Lp_15000> DS3/<DS3_15000> Test duration <limit>
 - 11 Lock the port at the remote end for a Multiservice Switch 7400 DS1 port.
lock Lp/<Lp> DS1/<DS1>
 - 12 Lock the port at the remote end for a Multiservice Switch 7400 E1 port.
lock Lp/<Lp> E1/<E1>
If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:
lock Laps/<Laps> vc4/0 vc12/<k,l,m> E1
 - 13 Lock the port at the remote end for a Multiservice Switch 7400 Sdh port.
lock Lp/<Lp> Sdh/<Sdh>
 - 14 Lock the port at the remote end for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.
lock Lp/<Lp_15000> DS3/<DS3_15000>



Attention: Complete [step 3](#) through [step 14](#) for all ports at the remote end for the IMA group. Test data is sent (shared) over all the links in the IMA group; if you do not complete [step 3](#) through [step 14](#) for all remote ports prior to initiating the test then errors in the test occur.

15 Initiate the test on the port at the remote end for a Multiservice Switch 7400 DS1 por.

start Lp/<Lp> DS1/<DS1> Test

16 Initiate the test on the port at the remote end for a Multiservice Switch 7400 E1 port.

start Lp/<Lp> E1/<E1> Test

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

start Laps/<Laps> vc4/0 vc12/<k,l,m> E1 Test

17 Initiate the test on the port at the remote end for a Multiservice Switch 7400 Sdh port.

start Lp/<Lp> Sdh/<Sdh> Test

18 Initiate the test on the port at the remote end for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

start Lp/<Lp_15000> DS3/<DS3_15000> Test

19 Lock the *Ima* component to be tested for Multiservice Switch 7400 nodes.

lock Lp/<Lp> Ima/<Ima>

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

lock Laps/<Laps> Ima/<Ima>

20 Lock the *Ima* component to be tested for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

lock Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>

21 Invoke the test on the *Ima* component for Multiservice Switch 7400 nodes.

start Lp/<Lp> Ima/<Ima> Test

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

start Laps/<Laps> Ima/<Ima> Test

22 Invoke the test on the *Ima* component for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

start Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Test

23 Display the results of a test in progress for Multiservice Switch 7400 nodes.



display Lp/<Lp> Ima/<Ima> Test

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

display Laps/<Laps> Ima/<Ima> Test

- 24 Display the results of a test in progress for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Test

- 25 If necessary, stop the test for Multiservice Switch 7400 nodes.

stop Lp/<Lp> Ima/<Ima> Test

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

stop Laps/<Laps> Ima/<Ima> Test

- 26 If necessary, stop the test for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

stop Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Test

- 27 Unlock the *Ima* component when the test is complete for Multiservice Switch 7400 nodes.

unlock Lp/<Lp> Ima/<Ima>

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

unlock Laps/<Laps> Ima/<Ima>

- 28 Unlock the *Ima* component when the test is complete for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

unlock Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>

- 29 If necessary, stop the test on the port at the remote end for a Multiservice Switch 7400 DS1 port.

stop Lp/<Lp> DS1/<DS1> Test

- 30 If necessary, stop the test on the port at the remote end for a Multiservice Switch 7400 E1.

stop Lp/<Lp> E1/<E1> Test

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:

stop Laps/<Laps> vc4/0 vc12/<k,l,m> E1 Test

- 31 If necessary, stop the test on the port at the remote end for a Multiservice Switch 7400 Sdh port.

stop Lp/<Lp> Sdh/<Sdh> Test



- 32 If necessary, stop the test on the port at the remote end for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.
stop Lp/<Lp_15000> DS3/<DS3_15000> Test
- 33 Unlock the port at the remote end when the test is complete for a Multiservice Switch 7400 DS1 port.
unlock Lp/<Lp> DS1/<DS1>
- 34 Unlock the port at the remote end when the test is complete for a Multiservice Switch 7400 E1 port.
unlock Lp/<Lp> E1/<E1>

If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:
unlock Laps/<Laps> vc4/0 vc12/<k,l,m> E1
- 35 Unlock the port at the remote end when the test is complete for a Multiservice Switch 7400 Sdh port.
unlock Lp/<Lp> Sdh/<Sdh>
- 36 Unlock the port at the remote end when the test is complete for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.
unlock Lp/<Lp_15000> DS3/<DS3_15000>

--End--

Variable definitions

| Variable | Value |
|-------------|--|
| <DS1> | is the instance number of the DS1 port. |
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <E1> | is the instance number of the E1 port. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-3 inclusive. |
| <k,l,m> | is the TUG value, with k = TUG-3 (values 1 to 3), l = TUG-4 (values 1 to 7), and m = TUG-12 (values 1 to 3). |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <limit> | is the maximum length of time (in minutes) that the test can run. The default value is 1.00. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |

(1 of 2)




| Variable | Value |
|------------|--|
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <sdh> | is the instance number of the STM-1 <i>Sdh</i> component. |
| <vc4> | is the instance number of the <i>Vc4</i> component. |

(2 of 2)




Procedure job aid

Ima component hierarchy

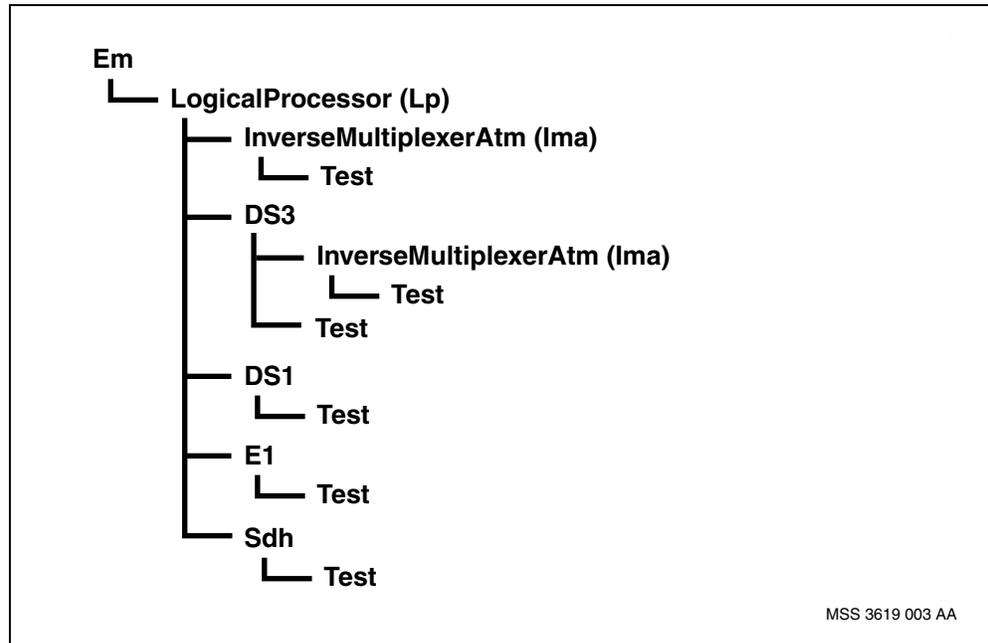

Ima component hierarchy, protected mode

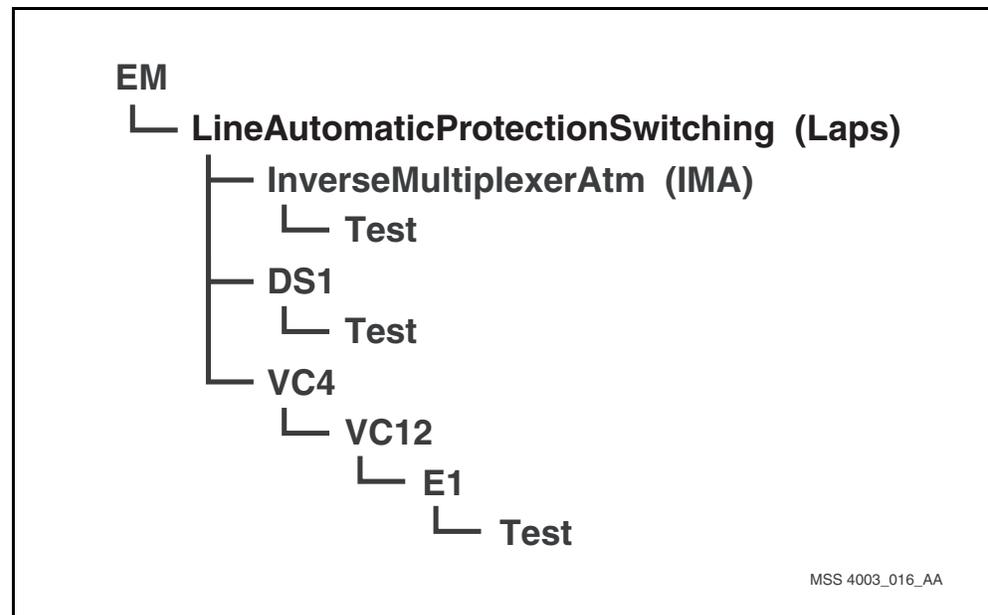



Monitoring the status of the IMA application

Monitor the status of the IMA application by displaying a list of operational attributes and select the appropriate value.

Procedure steps

| Step | Action |
|---------|--|
| 1 | Determine the operational attributes of the IMA application for Multiservice Switch 7400 nodes. display Lp/<Lp> Ima/<Ima> If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command: display Laps/<Laps> Ima/<Ima> |
| 2 | Determine the operational attributes of the IMA application for Multiservice Switch 15000 and Multiservice Switch 20000 nodes. display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> |
| --End-- | |


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA application component hierarchy

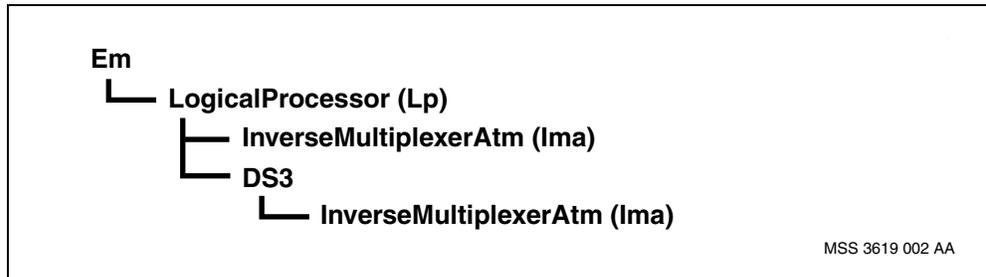

IMA application component hierarchy, protected mode

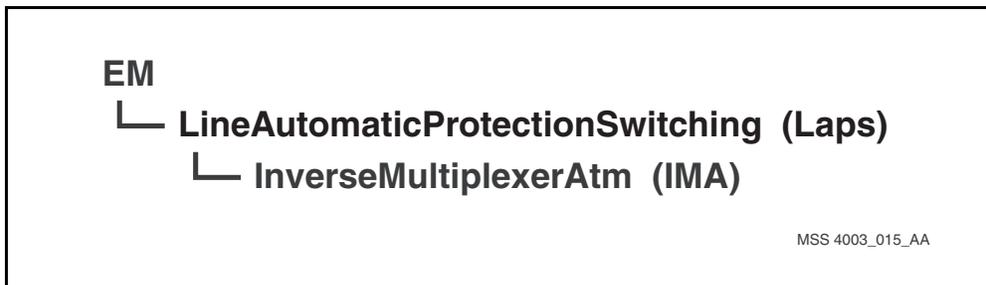



Determining the status of an IMA link

Determine the status of an IMA link by displaying a list of operational attributes indicating the status of a *Link* subcomponent.

Procedure steps

| Step | Action |
|------|--|
| 1 | <p>Determine the operational attributes of the link for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/<Lk></p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/<Lk></p> |
| 2 | <p>Determine the operational attributes of the link for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/<Lk_15000></p> |

--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value between 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA link component hierarchy

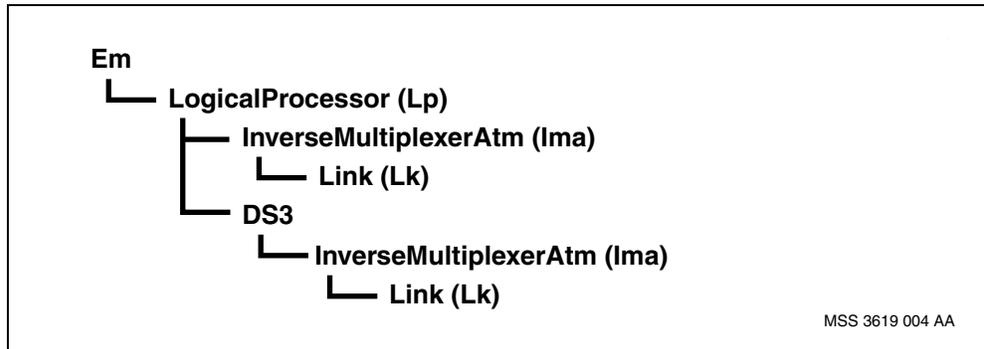

IMA link component hierarchy, protected mode

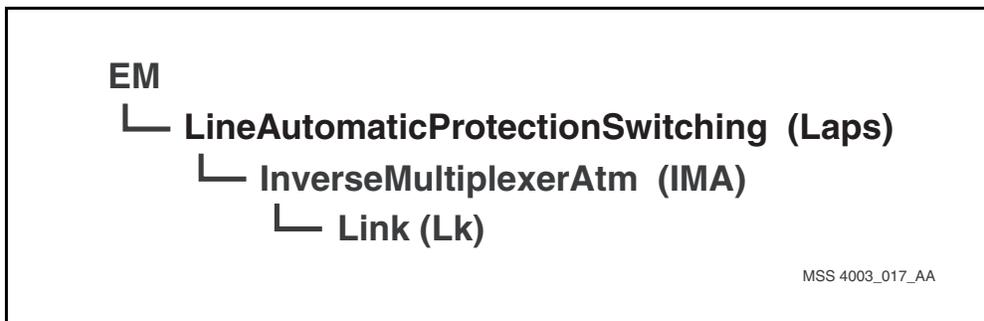



Determining the status of all links in an IMA group based on statistical attributes

Determine the status of all links in an IMA group based on its statistical attributes as part of monitoring IMA links.

Performance monitoring statistics are provided only if the ATM Forum IMA protocol is being used.

Procedure steps

| Step | Action |
|------|--|
| 1 | <p>Display the performance monitoring statistics provided for the links for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/* statistics</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/* statistics</p> |
| 2 | <p>Display the performance monitoring statistics provided for the links for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/* statistics</p> |

--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA group statistical attributes component hierarchy

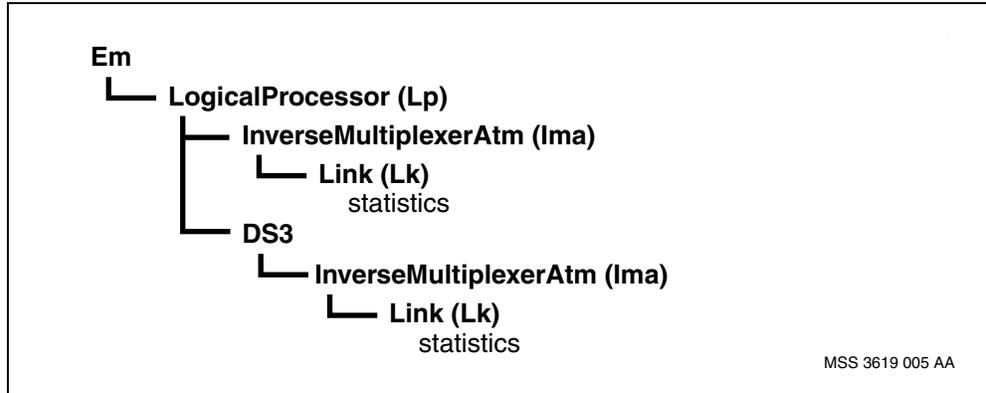

IMA group statistical attributes component hierarchy, protected mode

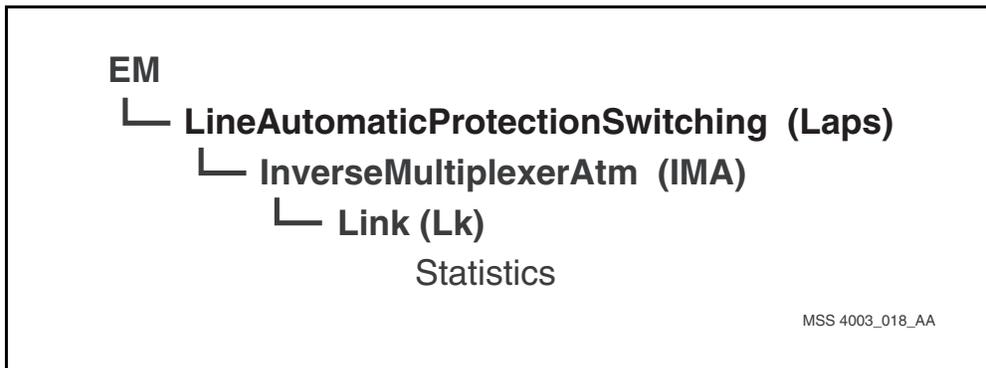



Determining the cause of the most recent OIF anomaly

Determine the cause of the most recent Out of IMA frame (OIF) anomaly. When an OIF anomaly occurs on a link, the attribute value does not change until another OIF occurs with a different cause. The attribute *lastOifCause* is always set to *noOif* in this case.

Procedure steps

| Step | Action |
|---------|--|
| 1 | <p>Display the cause of the most recent OIF anomaly for Multiservice Switch 7400 nodes.</p> <pre>display Lp/<Lp> Ima/<Ima> Lk/* lastOifCause</pre> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>display Laps/<Laps> Ima/<Ima> Lk/* lastOifCause</pre> |
| 2 | <p>Display the cause of the most recent OIF anomaly for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/* lastOifCause</pre> |
| --End-- | |


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

OIF anomaly component hierarchy

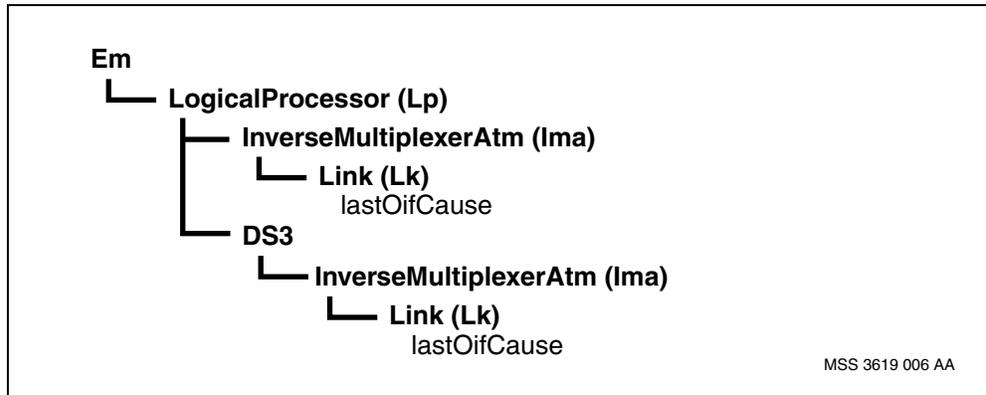

OIF anomaly component hierarchy, protected mode

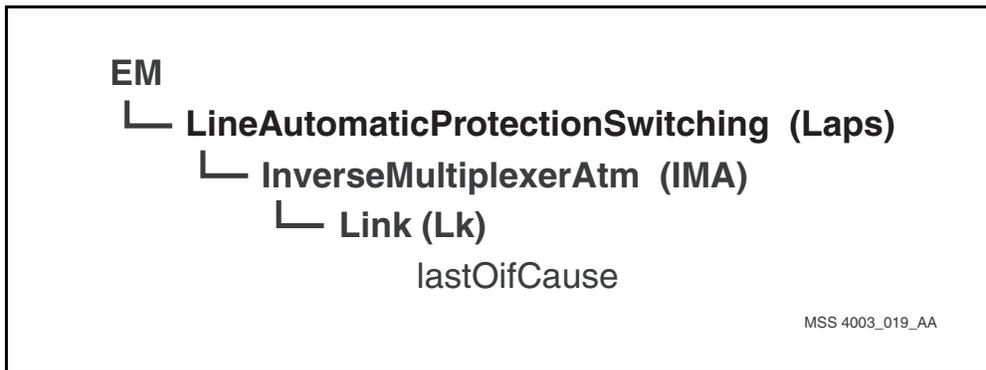



Determining the number of one-second intervals in which idle cells were received

Determine the number of one-second intervals in which one or more idle cells were received.

Procedure steps

| Step | Action |
|------|---|
| 1 | <p>Determine the number of one second intervals in which one or more idle cells were received, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/* idleCellSec</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/* idleCellSec</p> |
| 2 | <p>Determine the number of one second intervals in which one or more idle cells were received, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/* idleCellSec</p> |

--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value between 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

One-second intervals component hierarchy

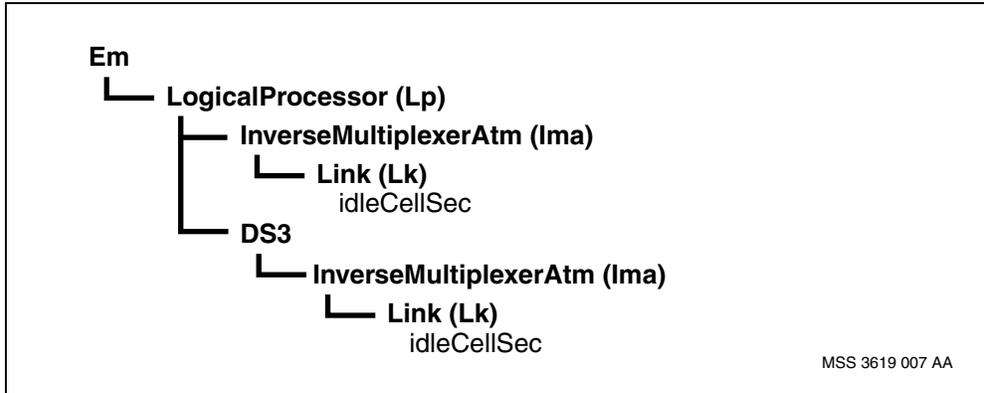

One-second intervals component hierarchy, protected mode

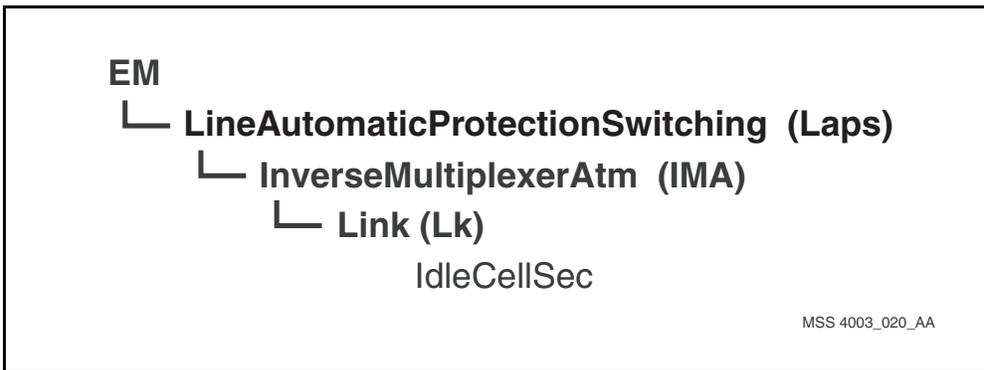



Determining if the IMA group is active

Determine whether or not the IMA group is active, the cause of failure if the group is inactive, and the remote defect indicator being received from IMA application at the remote end.

Procedure steps

| Step | Action |
|------|---|
| 1 | <p>Examine the operational state of the IMA component to determine whether or not the IMA group is active, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> operationalState</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> operationalState</p> <p>If the operational state is enabled, the group is active. If the operational state is disabled, the group is inactive.</p> |
| 2 | <p>Examine the operational state of the IMA component to determine whether or not the IMA group is active, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> operationalState</p> <p>If the operational state is enabled, the group is active. If the operational state is disabled, the group is inactive.</p> |
| 3 | <p>Determine why the group is inactive, if the IMA is disabled, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> failureCause</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> failureCause</p> |
| 4 | <p>Determine why the group is inactive, if the IMA is disabled, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> failureCause</p> |
| 5 | <p>Examine the remote defect indicator received from the remote IMA, if the failure cause is due to a remote failure, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> remoteDefect</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> remoteDefect</p> |



-
- 6 Examine the remote defect indicator received from the remote IMA, if the failure cause is due to a remote failure, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.

```
display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000>
remoteDefect
```

--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA group component hierarchy

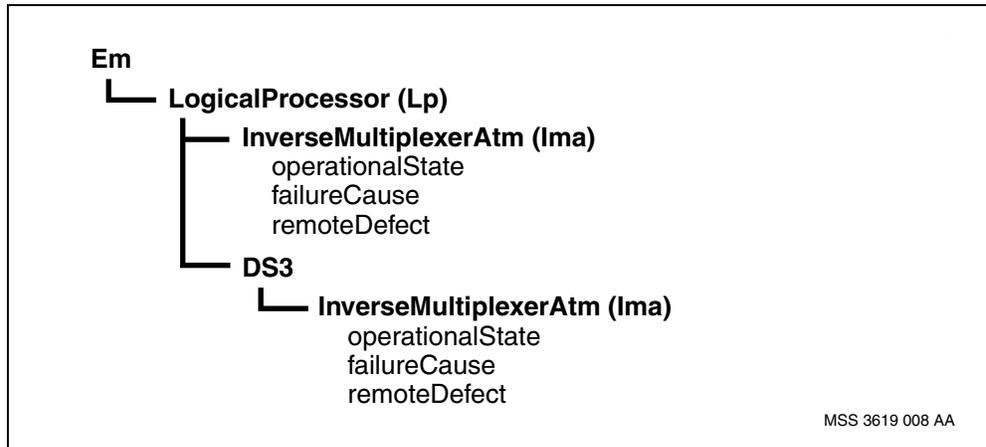

IMA group component hierarchy, protected mode

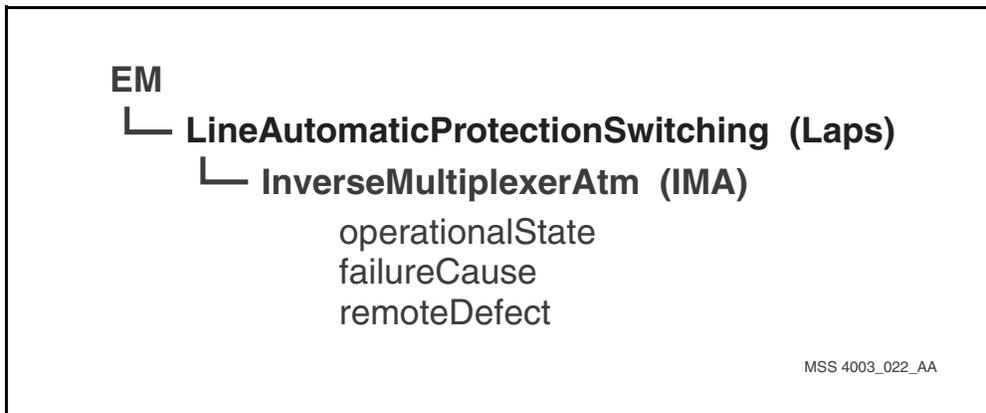



Determining the active and failed links in an IMA group

Determine which local links are active, which ones have failed, and the cause of failure.

Procedure steps

| Step | Action |
|------|--|
| 1 | <p>Determine which links are active or failed, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/* operationalState</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/* operationalState</p> |
| 2 | <p>Determine which links are active or failed, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/* operationalState</p> |
| 3 | <p>Display the reason for a disabled condition of a link (link is inactive), for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/<Lk> failureCause</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/<Lk> failureCause</p> |
| 4 | <p>Display the reason for a disabled condition of a link (link is inactive), for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/<Lk_15000> failureCause</p> |
| 5 | <p>Display the remoteDefect indicator to see why a link is inactive, in the case where the failureCause is remoteFailure, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/<Lk> remoteDefect</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/<Lk> remoteDefect</p> |
| 6 | <p>Display the remoteDefect indicator to see why a link is inactive, in the case where the failureCause is remoteFailure, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/<Lk_15000> remoteDefect</p> |



--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lk> | is the instance number of the link. |
| <Lk_15000> | is the instance number of the link, value 0-31 inclusive. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

MA group active and failed links component hierarchy

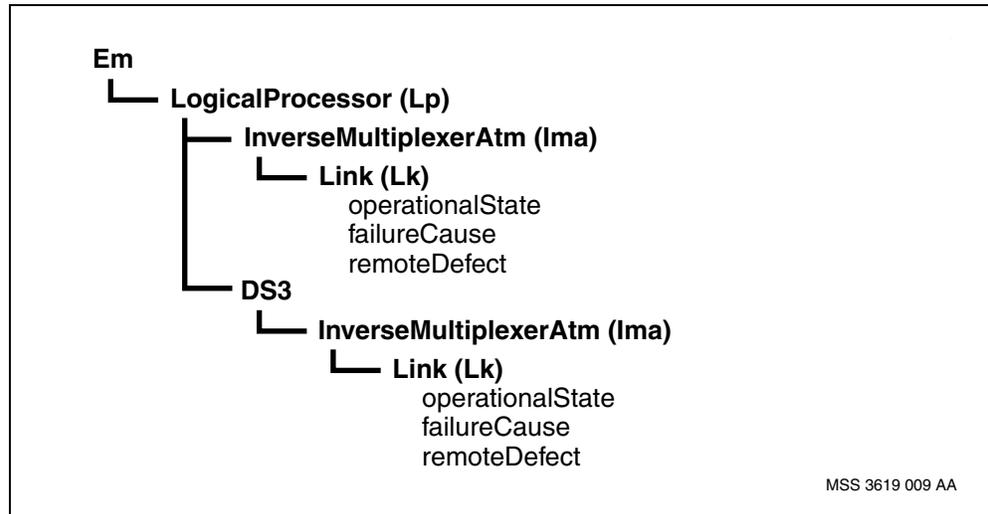

MA group active and failed links component hierarchy, protected mode

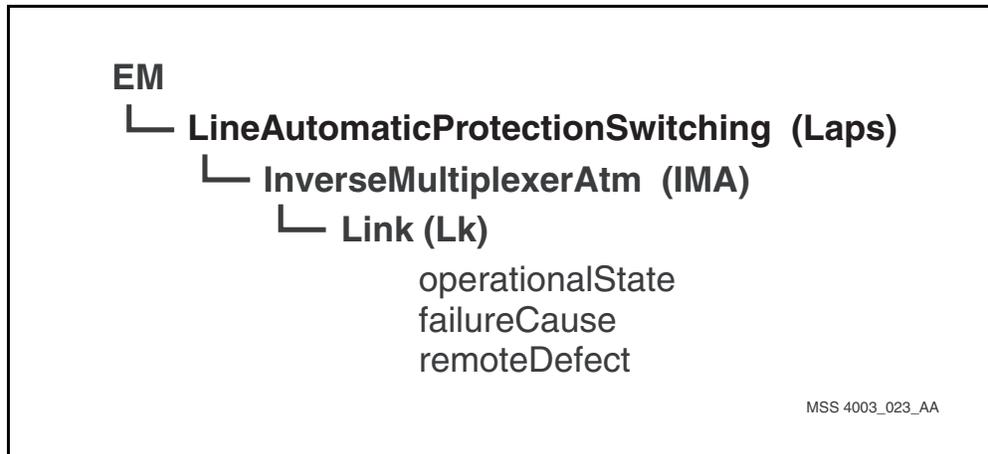



Determining which links in the IMA group are currently active and configured at the remote end

Determine which links in the IMA group have been activated by the IMA application at the remote end, and which links have been configured by the IMA application at the remote end.

Procedure steps

| Step | Action |
|------|--|
| 1 | <p>Display the <i>remoteLidsConfig</i> attribute of the <i>Ima</i> component to determine which links have been configured by the remote IMA, for Multiservice Switch 7400 nodes.</p> <pre>display Lp/<Lp> Ima/<Ima> remoteLidsConfig</pre> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>display Laps/<Laps> Ima/<Ima> remoteLidsConfig</pre> |
| 2 | <p>Display the <i>remoteLidsConfig</i> attribute of the <i>Ima</i> component to determine which links have been configured by the remote IMA, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> remoteLidsConfig</pre> |
| 3 | <p>Display the <i>remoteLidsActive</i> attribute of the <i>Ima</i> component to determine which links have been activated by the remote IMA.</p> <p>For Multiservice Switch 7400 nodes use the following command:</p> <pre>display Lp/<Lp> Ima/<Ima> remoteLidsActive</pre> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>display Laps/<Laps> Ima/<Ima> remoteLidsActive</pre> <p>For Multiservice Switch 15000 and Multiservice Switch 20000 nodes use the following command:</p> <pre>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> remoteLidsActive</pre> |
| 4 | <p>Display the <i>remoteGid</i> attribute of the <i>Ima</i> component to determine the IMA link group ID used by the remote IMA, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> remoteGid</pre> |



Attention: The *remoteGid* attribute is supported only if the ATM Forum IMA protocol is being used.

--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA group active and configured links component hierarchy

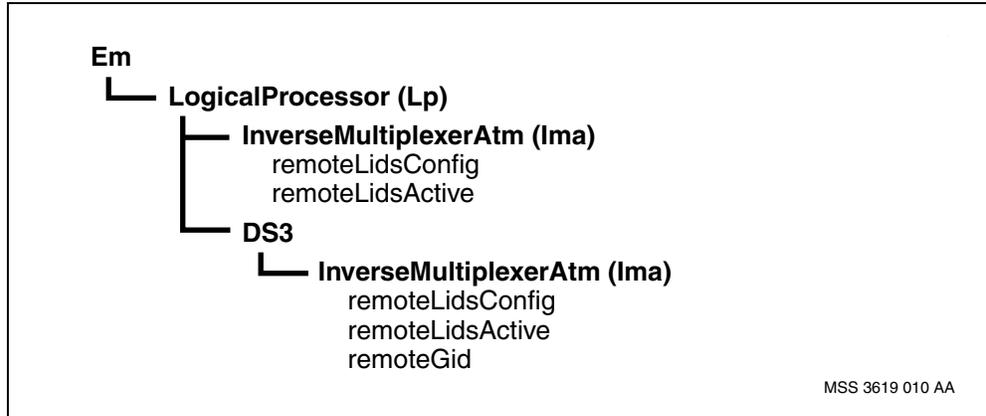

IMA group active and configured links component hierarchy, protected mode

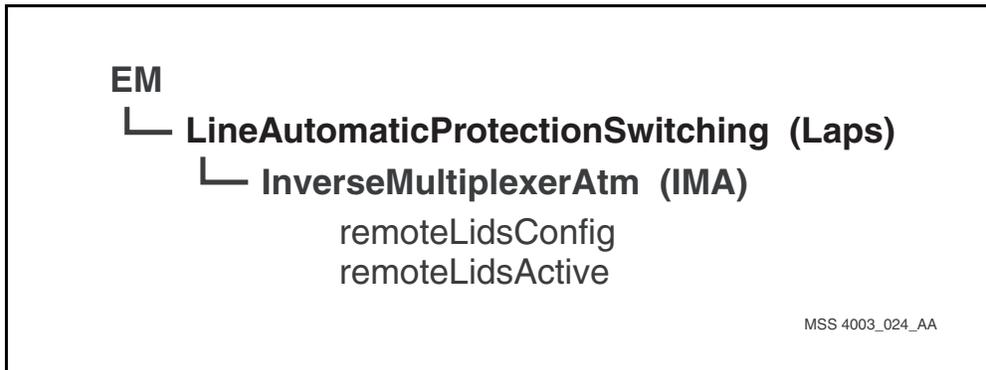



Determining the throughput available over an IMA group

Determine the throughput capacity currently available over an IMA link group.

Total throughput over an IMA link is the sum of the throughput available on each link, shown in cells per second.

Procedure steps

| Step | Action |
|---------|---|
| 1 | <p>Determine the throughput available over an IMA group, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> cellCapacity</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> cellCapacity</p> |
| 2 | <p>Determine the throughput available over an IMA group, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> cellCapacity</p> |
| --End-- | |


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value between 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA group available throughput component hierarchy

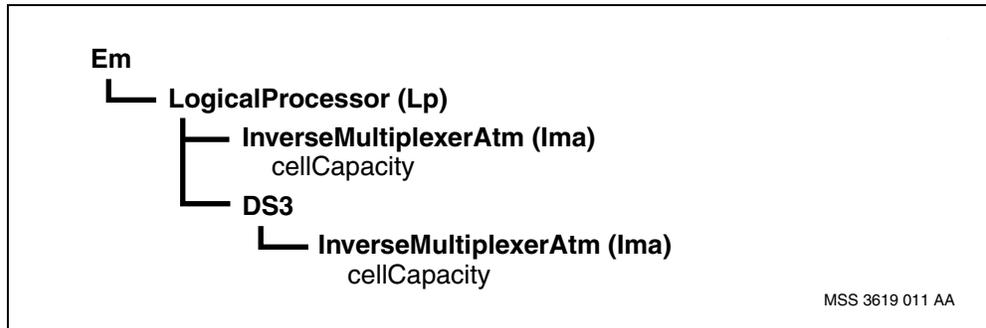

IMA group available throughput component hierarchy, protected mode

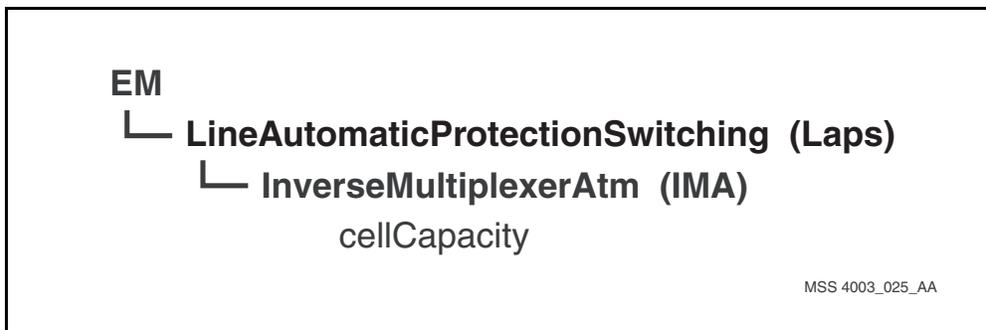



Determining the current cell utilization of an IMA group

Determine the current cell utilization of an IMA group as a percentage of the current capacity. Cell utilization is averaged over a one-minute sliding window.

Procedure steps

| Step | Action |
|------|---|
| 1 | <p>Determine the current cell utilization as a percentage of the current capacity of an IMA group, for Multiservice Switch 7400 nodes.</p> <pre>display Lp/<Lp> Ima/<Ima> receiveCellUtilization, transmitCellUtilization</pre> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>display Laps/<Laps> Ima/<Ima> receiveCellUtilization, transmitCellUtilization</pre> |
| 2 | <p>Determine the current cell utilization as a percentage of the current capacity of an IMA group, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> receiveCellUtilization, transmitCellUtilization</pre> |

--End--


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

IMA group current cell utilization component hierarchy

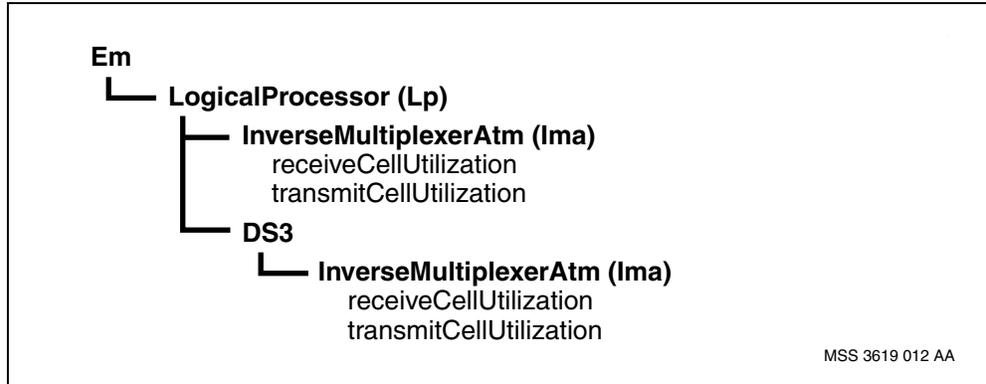

IMA group current cell utilization component hierarchy, protected mode

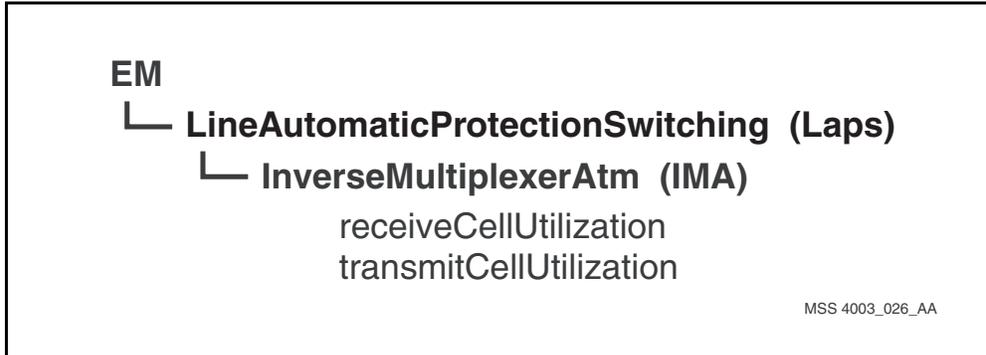



Monitoring relative link delays

Monitor relative link delays by displaying the link (or links) with the least delay in an IMA link group, and the last-measured delay of the remaining links relative to the link (or links) with the least delay in the group.

Prerequisites

- You are aware that if connectivity to the remote link is not available (for example, due to a LIF, LCD, LOF or LOS or condition), the ICP cells cannot provide the correct values for the *remoteDefect* and *remoteLid* attributes. The value for the *relativeDelay* attribute is meaningless when the link is down.

Procedure steps

| Step | Action |
|---------|---|
| 1 | <p>Determine the relative delay between each of the links in an IMA group, for Multiservice Switch 7400 nodes.</p> <pre>display Lp/<Lp> Ima/<Ima> Lk/* relativeDelay</pre> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <pre>display Laps/<Laps> Ima/<Ima> Lk/* relativeDelay</pre> |
| 2 | <p>Determine the relative delay between each of the links in an IMA group, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <pre>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/* relativeDelay</pre> |
| --End-- | |


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

Relative link delays component hierarchy

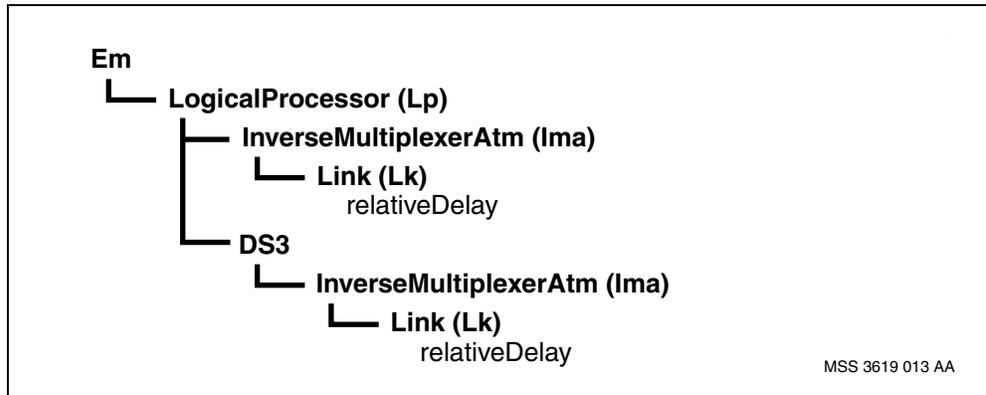

Relative link delays component hierarchy, protected mode

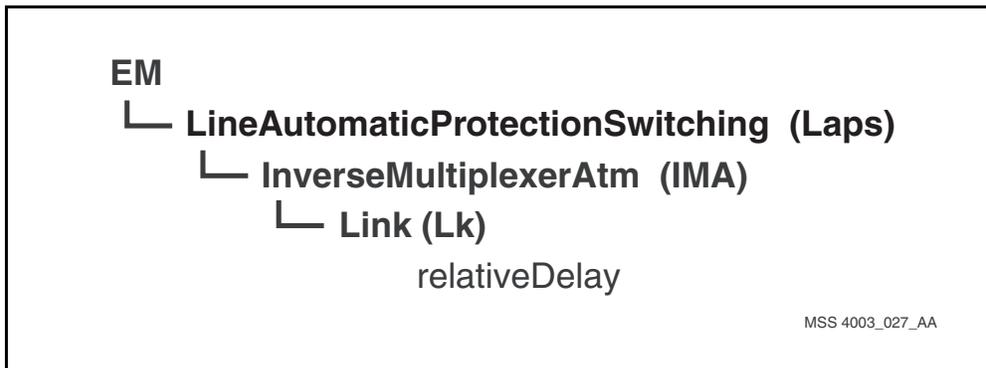



Determining remote link configuration

Determine remote link configuration by displaying the logical link ID used by the remote IMA for each link.

Prerequisites

- You are aware that if connectivity to the remote link is not available (for example, due to a LIF, LCD, LOF or LOS or condition), then the *remoteLid* has a value of 0.

Procedure steps

| Step | Action |
|----------------|--|
| 1 | <p>Determine the remote logical link ID of the links in an IMA group, for Multiservice Switch 7400 nodes.</p> <p>display Lp/<Lp> Ima/<Ima> Lk/* remoteLid</p> <p>If the 2-port STM-1 optical channelized CES/ATM/IMA FP is in protected mode, use the following command:</p> <p>display Laps/<Laps> Ima/<Ima> Lk/* remoteLid</p> |
| 2 | <p>Determine the remote logical link ID of the links in an IMA group, for Multiservice Switch 15000 and Multiservice Switch 20000 nodes.</p> <p>display Lp/<Lp_15000> DS3/<DS3_15000> Ima/<Ima_15000> Lk/<Lk_15000> remoteLid</p> |
| --End-- | |


Variable definitions

| Variable | Value |
|-------------|--|
| <DS3_15000> | is the instance number of the DS3 port, value 0-3 inclusive. |
| <Ima> | is the instance number of the IMA link group. |
| <Ima_15000> | is the instance number of the IMA link group, value 0-13 inclusive. |
| <Laps> | is the instance number of the <i>Laps</i> component. |
| <Lp> | is the instance number of the logical processor associated with the function processor providing IMA capability. |
| <Lp_15000> | is the instance number of the logical processor associated with the function processor providing IMA capability. |




Procedure job aid

Remote link configuration component hierarchy

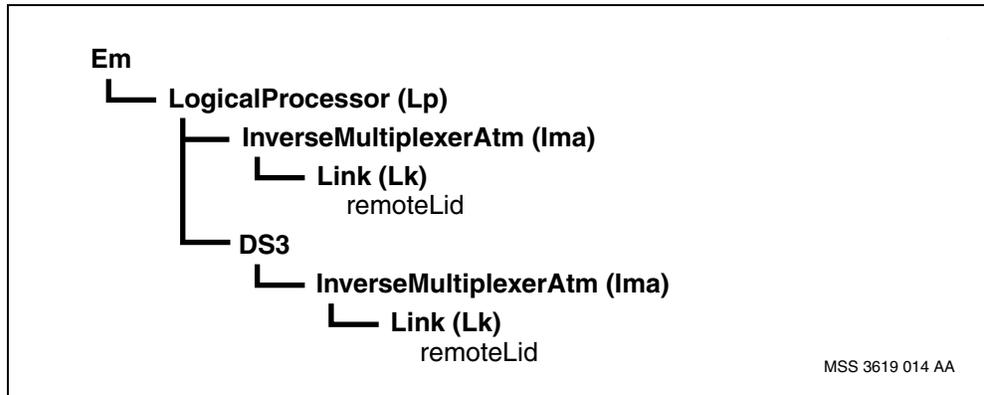

Remote link configuration component hierarchy, protected mode

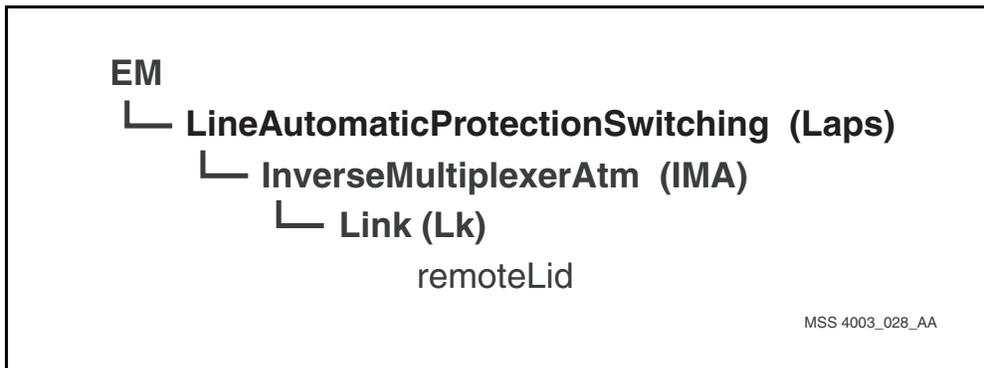



Determining if the IMA group provides adequate bandwidth

Determine if the IMA link group provides adequate bandwidth. An IMA link group may not always have enough bandwidth to support all ATM connections associated with the ATM interface. When some physical links on the IMA group have failed, some bandwidth non-elastic connections may have to be released and some bandwidth elastic connections may have to reduce their bandwidth consumption.

Procedure steps

| Step | Action |
|------|---|
| 1 | See NN10600-708 <i>Nortel Multiservice Switch 7400/15000/20000 ATM CAC and Bandwidth Fundamentals</i> for details on dynamic bandwidth management for ATM connections and how to monitor ATM connections and dynamic bandwidth. |

--End--



Troubleshooting IMA

Use this chapter to learn about how to troubleshoot the IMA feature.

Navigation

- [Multiservice Switch alarms \(page 68\)](#)
- [IMA-specific alarms \(page 69\)](#)
- [IMA link alarms \(page 71\)](#)
- [The troubleshooting process \(page 71\)](#)
- [Tools for troubleshooting IMA \(page 71\)](#)
- [Troubleshooting using Nortel Multiservice Data Manager \(page 72\)](#)
- [Handling problems \(page 72\)](#)

Multiservice Switch alarms

On-switch alarms are generated asynchronously by Nortel Multiservice Switch components and are displayed on the user interface to indicate faults or failure conditions on a Multiservice Switch node. When an alarm occurs, it indicates that a component needs to be serviced or that it has detected a fault elsewhere on the node. Alarm text descriptions contain information to assist you in monitoring and troubleshooting your Multiservice Switch network. Alarms specifically indicate one of the following:

- degradation/quality-of-service conditions
(for example, when a threshold is reached)
- processing error
(for example, protocol violations)
- failures/out-of-service conditions
(for example, hardware failures)
- administrative conditions
(for example, issuing the lock command)
- security violations



The interface can be either a VT100 terminal or Nortel Multiservice Data Manager workstation. For information on Multiservice Data Manager tools, see NN10400-300 *Nortel Multiservice Data Manager Administration Tools*.

Alarms contain information that can assist you in monitoring the node and the network. The figure [Example of an IMA alarm appearing on the text interface \(page 69\)](#) provides an example of an alarm. For complete information on alarms, see NN10600-500 *Nortel Multiservice Switch 6400/7400/15000/20000 Alarms Reference*.

Example of an IMA alarm appearing on the text interface

```
Lp/1 Ima/2 Lk/11; 1998-03-20 14:19:40.08
SET critical communications commProtocolError          7011 1210
ADMIN: unlocked  OPER: disabled  USAGE: idle
AVAIL:          PROC:          CNTRL:
ALARM: critical  STBY: notSet    UNKNW: false
Id: 01000064 Rel:
Com: Loss of Ima Framing (LIF) has been detected.
     Check the last OIF cause of the link.
Int: 1/0/2/8499; ImaAFLinkHandler_Actor.cc; 2202; p5.0d.30
```

IMA-specific alarms

Nortel Multiservice Switch alarms indicating the following state changes can be generated by IMA feature.

Attention: The text “(A)” denotes that the alarm applies to the ATM Forum IMA protocol.

- 7011 1100 - IMA group failure. There are no links active in the group.
- 7011 1210 (A) - IMA link failure. A loss of IMA frame (LIF) defect has occurred on a link.
- 7011 1211 (A) - IMA link failure. The link is experiencing a loss of delay synchronization (LODS) condition.
- 7011 1212 (A) - IMA link failure. The link has been misconnected.
- 7011 1213 (A) - IMA link failure. The system has detected a remote failure indicator (RFI) alarm condition.
- 7011 1214 (A) - IMA link failure. The system has detected a fault alarm condition on the link.
- 7011 1215 (A) - IMA link failure. The remote link has gone into an unusable state.



- 7011 1216 (A) - IMA link failure. The system has detected a protocol error alarm condition on the link

For details on these alarms, see NN10600-500 *Nortel Multiservice Switch 6400/7400/15000/20000 Alarms Reference*.

IMA group alarms

IMA group alarms are set and cleared in response to conditions causing the group to go out of service. There is one alarm at the IMA group level (7011 1100).

When the ATM Forum IMA protocol is used, the alarm text provides an indication of the cause of the alarm. The following are potential causes:

- The IMA group IDs received in the ICP cells on all candidate links (remaining after the transmit test procedure) involved in IMA group start-up do not match.
- The IMA frame lengths received in the ICP cells on all candidate links involved in IMA group start-up do not match the value supported by the IMA group. (Nortel Multiservice Switch IMA supports only a frame length of 128.)
- The logical link IDs received in the ICP cells on all candidate links (remaining after the transmit test procedure) involved in IMA group start-up are not unique.
- The IMA group symmetry received in the ICP cells on all candidate links involved in IMA group start-up is not supported. (Multiservice Switch IMA supports only symmetrical configuration.)
- An expected state transition expected from the far end did not take place during IMA group start-up.
- The far end rejects the IMA frame length being used by the near end during IMA group start-up.
- The far end rejects the group symmetry being used by the near end during IMA group start-up.
- The far end aborts for a reason other than bad frame length or symmetry during IMA group start-up.
- No links can be activated during IMA group start-up, or the number of active links is reduced to zero during normal operation.
- During IMA group start-up, or in normal operation, the Group Status field in ICP cells received on candidate or active links indicates that the remote IMA has insufficient links.
- The far end enters start-up while the near end is not in start-up and is unlocked.



IMA link alarms

IMA link alarms are set and cleared in response to conditions causing the link to go out of service. Some link alarms are set immediately when an error condition is detected and cleared immediately when the error condition is no longer present. Other link alarms are set when a defect is present for a period of time. These alarms are cleared when the defect is absent for a period of time. In some cases, intermittent defects can also lead to alarms.

Link alarms for the ATM Forum IMA protocol

A number of alarm types are defined at the IMA link level when the ATM Forum IMA protocol is being used in Nortel Multiservice Switch systems. These alarm types are

- loss of IMA frame (LIF) defect on the link
- loss of delay synchronization (LODS) on the link
- the link is misconnected
- remote failure indicator (RFI) condition has occurred
- a fault condition has occurred indicating an invalid value
- remote link is unusable
- protocol error has occurred on the link

The troubleshooting process

The objective of effective troubleshooting is to

- identify the problem quickly
- isolate the cause
- resolve the fault as quickly as possible in order to minimize disruption in service or loss of data

Tools for troubleshooting IMA

You can perform a manual external loopback test on the *Ima* component. For instructions on performing this test, see [Performing a manual test on the Ima component \(page 33\)](#). You can also monitor the condition of your IMA application by performing a number of other commands (see [IMA feature monitoring \(page 26\)](#) for details).

You can avoid having to manually set up the external loopback for an IMA test by using the following steps:

- 1 Perform the external loopback test on the port components at the remote end. For instructions, see *NN10600-520 Nortel Multiservice Switch 7400/15000/20000 Fault and Performance Management: Troubleshooting*.



- 2 Perform the IMA test. See [Performing a manual test on the Ima component \(page 33\)](#).

Troubleshooting using Nortel Multiservice Data Manager

Nortel Multiservice Data Manager offers a comprehensive set of fault management tools for detecting and isolating problems. When using Multiservice Data Manager to troubleshoot the IMA feature, use the integrated alarms display to view alarms and the integrated command console for access to IMA operational attributes.

For details on the scope and use of Multiservice Data Manager interface and software tools, see NN10400-300 *Nortel Multiservice Data Manager Administration Tools*.

Handling problems

The table [Handling problems \(page 72\)](#) provides guidelines on how to respond to problems that may occur with an IMA application. Problems that occur when your IMA application is operating may not be confined to IMA components only.

Attention: The text “(A)” denotes that an alarm or value applies to the ATM Forum IMA protocol.

Handling problems

| Problems that may occur | Probable causes | Corrective measures |
|-------------------------------------|--|---|
| IMA group alarm is set 7011 1100 | Value indicated for <i>failureCause</i> attribute of the <i>Ima</i> component: noGoodLinksInStartup - No links could be activated during IMA group startup badGidInStartup - Different group IDs were received from the remote links during IMA group startup badLidInStartup - Duplicate logical link IDs were received from the remote links during IMA group startup | Check the operational attributes of the <i>Link</i> subcomponents. Ensure that the associated physical ports are enabled. Verify that they are connected to ports being used by a properly configured remote IMA group. Ensure that the links in the group are connected to links under a single remote <i>Ima</i> component. Ensure that the links in the group are connected to links under a single remote <i>Ima</i> component. |
| (1 of 8) | | |



Handling problems (continued)

| Problems that may occur | Probable causes | Corrective measures |
|-------------------------|--|---|
| | <p>unsupportedFrameLengthInStartup - An IMA frame length other than 128 cells was received from one or more of the remote links during IMA group startup (p)</p> <p>An IMA frame length other than 128 cells was received from all of the remote links during IMA group startup (A)</p> <p>timeoutInStartup - The remote IMA application failed to enter IMA startup within the expected amount of time</p> <p>noGoodLinks - The group was active, but all links have become disabled (p)</p> <p>All links have become disabled or failed to become enabled while the IMA group was not in startup state (A)</p> <p>remoteFailure - The <i>Ima</i> component at the remote end has a problem</p> | <p>Ensure that the remote IMA group uses a frame length supported by your local IMA group.</p> <p>Examine the operational attributes of the remote <i>Ima</i> component. Ensure that the component is not locked and that its associated ports are enabled.</p> <p>Attention: Often the <i>remoteDefect</i> attribute of the <i>Ima</i> component provides an indication of the cause of failure at the remote end; however, under some circumstances this defect indicator cannot be received, so it is always best to examine the remote end directly.</p> <p>Check the operational attributes of the <i>Link</i> subcomponents. Ensure that the associated physical ports are enabled. Examine the operational attributes of the remote <i>Ima</i> component to determine if it has caused the problem.</p> <p>Examine the operational attributes of the remote <i>Ima</i> component.</p> <p>Attention: The <i>remoteDefect</i> attribute of the <i>Ima</i> component often provides an indication of the cause of failure at the remote end; however, under some circumstances this defect indicator cannot be received, so it is always best to examine the remote end directly.</p> |
| (2 of 8) | | |



Handling problems (continued)

| Problems that may occur | Probable causes | Corrective measures |
|--|--|--|
| | <p>unsupportedSymmetryInStartup</p> <p>- The symmetry proposed by the far end IMA group is not supported on the local IMA group. This occurs when the local IMA group is running ATM Forum protocol and the far end proposes a group symmetry other than “symmetric configuration and operation” (A)</p> | <p>Ensure that the remote IMA group uses a group symmetry supported by your local IMA group.</p> <p>Reprovision the far-end IMA group to use the ATM Forum protocol.</p> |
| <p>IMA link alarm is set 7011 1200 (p), or the <i>Link</i> component is disabled</p> | <p>If the value of the <i>availabilityStatus</i> attribute of the <i>Link</i> component is depend and the physical interface is out of service (the <i>operationalState</i> attribute of the <i>Chan</i> component being used by the link is disabled)</p> | <p>Correct the problem that has caused the physical interface to go out of service. See the procedures for troubleshooting problems with function processors in NN10600-520 <i>Nortel Multiservice Switch 7400/15000/20000 Fault and Performance Management: Troubleshooting.</i></p> |
| | <p>If the <i>availabilityStatus</i> of the <i>Link</i> component is offLine, the parent <i>Ima</i> component is locked (<i>adminState</i> attribute of the <i>Ima</i> component is “locked”)</p> | <p>Unlock the parent <i>Ima</i> component</p> |
| | <p>Value indicated for <i>failureCause</i> attribute of the <i>Link</i> component:</p> <p>interfaceDown - The physical interface is out of service.</p> | <p>Correct the problem that has caused the physical interface to go out of service or become unusable. See the procedures for troubleshooting problems with function processors in NN10600-520 <i>Nortel Multiservice Switch 7400/15000/20000 Fault and Performance Management: Troubleshooting.</i></p> |
| (3 of 8) | | |



Handling problems (continued)

| Problems that may occur | Probable causes | Corrective measures |
|-------------------------|---|---|
| | <p>lif - The link is in a “loss of IMA frame” state.</p> <p>lods - The differential delay of this link exceeds the configured value for the <i>maxDiffDelay</i> attribute for the <i>Ima</i> component given its configured <i>linkSelectionCriterion</i> attribute</p> | <p>Check the cabling at the associated port to ensure that it is properly connected to a port associated with a <i>Link</i> component on the remote IMA group. Then, check the status of the remote port to see if it is enabled.</p> <p>Display the <i>relativeDelay</i> operational attributes of all the Links under the <i>Ima</i> component to determine their differential delays relative to the link with the least delay.</p> <p>If the provisioned <i>maxDiffDelay</i> attribute is not at its maximum value and an increased transmission delay can be tolerated, increase the value of the <i>maxDiffDelay</i> attribute to activate this link.</p> <p>Otherwise do one of the following:</p> <ul style="list-style-type: none">• Remove one or more of the other links from the group to reduce the differential delay of this link such that it is activated.• Replace the physical facility used by this link with one exhibiting a lower differential delay. |

(4 of 8)



Handling problems (continued)

| Problems that may occur | Probable causes | Corrective measures |
|--|---|---|
| IMA link alarm is set 7011 1210 (A) The alarm is due to a loss of IMA frame (LIF) failure | The link is incorrectly connected or incorrectly configured. | Check the <i>lastOfCause</i> operational attribute of the link to obtain an indication of the cause of the problem. Check that the physical port is properly connected at the local and remote ends and that all port alarms are clear. Check the configuration of the <i>Link</i> components on the local and remote ends. |
| IMA link alarm is set 7011 1211 (A) A loss of delay synchronization (LODS) condition is present on the link. | The transit delay experienced on the link is such that the link is no longer in link delay synchronization (LDS). | Check the <i>relativeDelay</i> operational attribute of the link to determine its differential delay. If an increase in the maximum differential delay across the IMA group is acceptable, increase the setting of the <i>maxDiffDelay</i> attribute of the parent <i>Ima</i> component. Alternatively, change the setting of the <i>linkSelectionCriterion</i> attribute of the parent <i>Ima</i> component. This may force the IMA group to select a different reference link. Attention: This action may cause other links to experience an LODS condition. If the problem persists, replace the physical facility used by this link with one that has a transit delay closer to that of the reference link. |
| IMA link alarm is set 7011 1212 (A) The link is misconnected. | The link is incorrectly connected or incorrectly configured. | Check that the physical port is properly connected at the local and remote ends. Check the configuration of the <i>Link</i> components on the local and remote ends. |
| (6 of 8) | | |



Handling problems (continued)

| Problems that may occur | Probable causes | Corrective measures |
|--|--|---|
| IMA link alarm is set 7011 1213 (A) A remote failure indicator (RFI) alarm condition has occurred. | The remote IMA link has experienced a persistent defect. | Check the configuration of the <i>Link</i> components on the local and remote ends. Display the operational attributes of the remote IMA <i>Link</i> component. |
| IMA link alarm is set 7011 1214 (A) A fault alarm condition has occurred on the link. | The link is incorrectly connected or incorrectly configured. | Check that the physical port is properly connected at the local and remote ends. Check the <i>failureCause</i> attribute of the IMA <i>Link</i> components. Check the configuration of the <i>Link</i> components on the local and remote ends. |
| IMA link alarm is set 7011 1215 (A) The remote link has gone to the unusable state. | The remote IMA link has gone to the Unusable state. (For example, the remote port is down.) | Display the operational attributes of the <i>Link</i> component at the remote end to determine why the link has entered the unusable state. |
| IMA link alarm is set 7011 1216 (A) A protocol error alarm condition has occurred on the link. The link could not be activated within the prescribed time-out period. | The remote link is not changing state as quickly as the local link. | Display the operational attributes of the remote IMA <i>Link</i> component. Check the configuration of the <i>Link</i> components on the local and remote ends. |
| Occasional loss of traffic but no alarms issued | If certain Cell statistics (such as <i>uncorrectableHecErrors</i>) or Port statistics (such as <i>sevErroredSec</i>) are increasing, this indicates a problem with the physical facility connecting the near-end and far-end IMA groups. (For more information about these statistics, see NN10600-060 <i>Nortel Multiservice Switch 7400/15000/20000 Component Reference</i> .) | Verify the physical links connecting the two IMA groups and replace them if they are not providing the required quality. Do a port test on the local and remote ends to determine if there is any faulty equipment and replace a card if required. |
| (7 of 8) | | |



Handling problems (continued)

| Problems that may occur | Probable causes | Corrective measures |
|--|---|--|
| | If the <i>idleCellSec</i> operational attribute of an IMA <i>Link</i> component is increasing, this means that idle cells are being received on the link. | <p>Check the IMA clocking mode at the far-end and the clock sources for the physical ports that are part of the IMA group.</p> <p>Display the <i>clockingModeMismatch</i> operational attribute of the IMA <i>Link</i>. If its value is on, this means that both ends of the IMA group are not using the same clocking mode. Although this is a valid configuration, ensure that this is the expected result.</p> <p>Ensure that there is a bit transparent link to the remote IMA. For example, if the two IMA groups are connected through a cell-relay network, this will cause idle cells to be inserted.</p> <p>Check the equipment at the far-end.</p> |
| | If one of the <i>icpViolations</i> , <i>sevErroredSec</i> , or <i>unavailSec</i> operational attributes of an IMA <i>Link</i> component is increasing, this means that the link is occasionally losing IMA framing. | <p>Check the <i>lastOifCause</i> attribute of the IMA <i>Link</i> components.</p> <p>Do an Ima loopback test on local and remote IMA groups to determine if there is faulty equipment and replace a card if required. (See Performing a manual test on the Ima component (page 33).)</p> |
| When one physical link goes out of service, it causes two IMA links to go down. | The transmit and receive wires of a port are not connected to the same port at the remote end. | Display the <i>remoteLid</i> operational attribute of the IMA links at both ends. Make sure the values match the expected ones. |
| IMA link states are going up and coming down repeatedly. Some link states are incorrect (either down or disabled). | The number of links has exceeded the total number of links allowed for each port block/port grouping. | Reconfigure the total number of links so that they are less than or equal to the total number of links allowed per maker/port grouping. |
| Attention: The text "(A)" denotes that an alarm or value applies to the ATM Forum IMA protocol. | | |
| (8 of 8) | | |



IMA conceptual overview

Use this chapter to have an overview of inverse multiplexing for ATM (IMA) in Nortel Multiservice Switch systems.

For a more detailed description of IMA functionality, see [Understanding IMA \(page 92\)](#)

Navigation

- [What is IMA? \(page 80\)](#)
- [How does IMA work? \(page 81\)](#)
- [Network implementations of IMA \(page 81\)](#)
- [Terminology specific to IMA \(page 83\)](#)
- [Supported ATM features and services \(page 83\)](#)
- [Function processors supporting IMA \(page 85\)](#)
- [IMA link groups and independent links \(page 85\)](#)
- [IMA protocols \(page 89\)](#)
- [Bandwidth options using ATM \(page 89\)](#)

What is IMA?

Inverse multiplexing for asynchronous transfer mode (ATM), or IMA, is a feature available in Nortel Multiservice Switch systems that supports the transparent transmission of ATM cell data over an IMA link group. Depending upon the function processor in use, IMA transparently distributes a single stream of ATM layer cell traffic onto one or more physical links for transmission across the links. IMA then combines the traffic back into the original ATM layer cell sequence at the remote end.

For information on which function processors support IMA, see NN10600-551 *Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference*.




How does IMA work?

IMA groups multiple DS1 or E1 physical links or logical links (depending on the type of function processor) to form a single high-speed ATM link. This link is called an IMA link group. The figure [The concept of inverse multiplexing \(unidirectional example\) illustrated using the 8-port DS1/E1 ATM FP \(page 81\)](#) shows an example of two Nortel Multiservice Switch 7400 nodes with function processors (FPs) running IMA. In this example, eight DS1 or E1 lines are grouped together to form one IMA link group.

The number of IMA link groups and the number of DS1 or E1 physical links or logical links forming the IMA link groups are determined by the particular node's function processors and by the provisioning decisions. See [Cell transport functionality using IMA \(page 94\)](#) for details.

The concept of inverse multiplexing (unidirectional example) illustrated using the 8-port DS1/E1 ATM FP

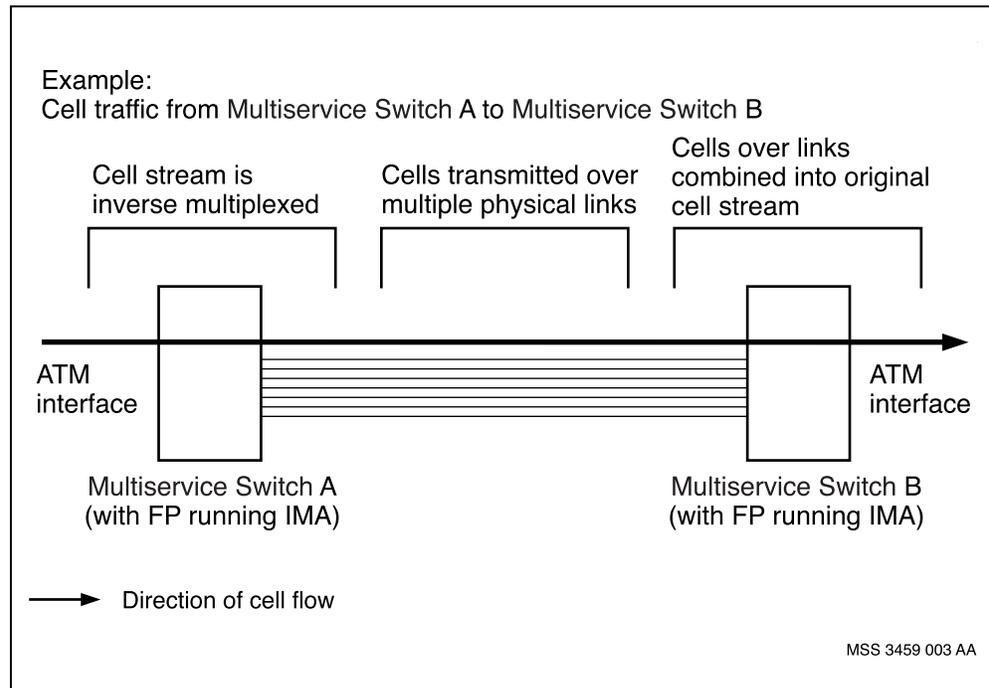

Network implementations of IMA

An IMA link group can be used in various network implementations. For example, an IMA link group can be used within a Nortel Multiservice Switch network, or to access an external ATM network.

The figure [Example of using IMA link groups \(Multiservice Switch 7400\) in an ATM network \(page 82\)](#) shows an example of how an IMA link group can be used to provide higher speed links between access and backbone layer nodes. In this example, the link group speed is three times the E1 rate, or




5.715 Mbit/s. The ATM Forum protocol is being used, in this case, by the node in the access layer. This allows interoperability with the external vendor equipment in the backbone layer, based on the ATM Forum *Inverse Multiplexing for ATM (IMA) Specification*.

In Nortel Multiservice Switch 7400 nodes, IMA can also be used to provide high speed access between backbone nodes at rates between E1 and E3. In this example, the link group speed is five times the E1 rate, or 9.525 Mbit/s. One of the benefits of IMA is that existing hardware can be used to access higher line rates.

Attention: It is possible to transport an IMA cell stream over a bit transparent medium, such as leased DS1/E1 lines or the AAL1 circuit emulation system supported on Multiservice Switch. However, due to the format required by IMA control protocol (ICP) cells, it is not possible to transport the IMA cell stream over an ATM network between nodes running ATM bearer service (cell relay). For details on ICP cells, see [IMA framing and control \(page 98\)](#).

Example of using IMA link groups (Multiservice Switch 7400) in an ATM network

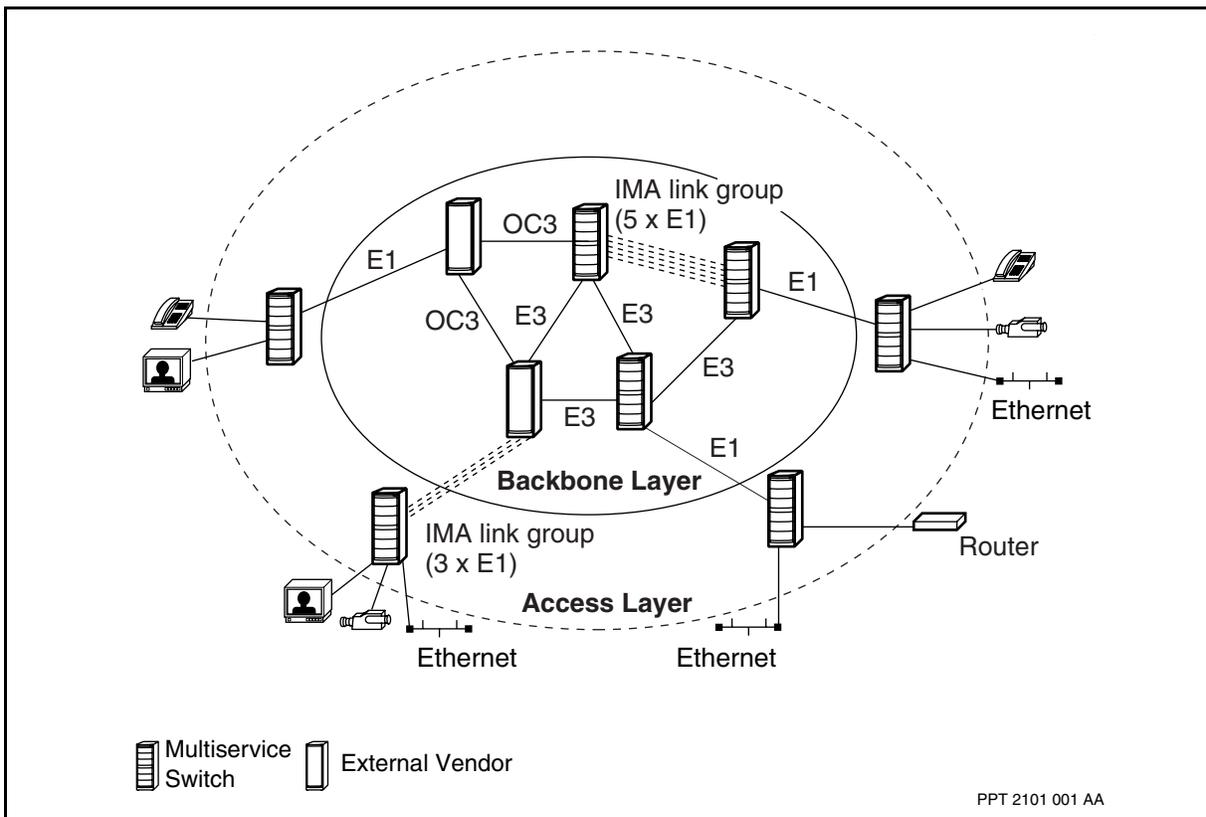



Terminology specific to IMA

Inverse multiplexing for ATM refers to the transparent transport of a single ATM cell stream over one or more physical links, and the combining and reordering of cells back into the original stream at the receiving end.

An IMA *link group* refers to the combination of one or more physical or logical links (depending on the type of function processor) that use the inverse multiplexing process to transmit traffic across these links. (This may also be referred to as an *IMA group*.) An IMA link group is presented as a single link to the ATM layer. A link group originates on one FP running the IMA feature and terminates on another FP running the IMA feature (typically these FPs are on two different Nortel Multiservice Switch nodes).

Channelization refers to a function processor's ability to group DS1 access onto a DS3 line. For example, on Multiservice Switch 15000 and Multiservice Switch 20000 node's DS3 channelized ATM FP, 28 individual DS1 channels (lines or ATM UNIs) are multiplexed and demultiplexed on each of four DS3 cell streams (112 DS1 channels or 112 ATM UNIs).

An *independent link* refers to a single DS1/E1 physical link or DS1 logical link that is used directly by the ATM layer, without being part of an IMA link group.

Attention: An IMA link group is capable of using the IMA protocol over a single DS1/E1 physical link or DS1 logical link (depending of the type of function processor). This is useful when the current requirement may only warrant the use of a single physical link or logical link, but anticipated growth will require additional links. Physical or logical links can be added to the IMA link group as the need for additional bandwidth arises.

Supported ATM features and services

IMA accommodates cell level ATM layer traffic and is compatible with the full range of associated Nortel Multiservice Switch ATM features. IMA supports fully integrated functionality, including

- ATM traffic management for different service categories within an ATM interface
- Multiservice Switch routing system for the efficient handling of link failures

The table [IMA and related features \(page 84\)](#) shows additional features that closely interwork with IMA in Multiservice Switch systems. These features are described elsewhere in the Nortel Multiservice Switch documentation suite.



IMA and related features

| Feature | Document with feature description | Feature description |
|---|---|--|
| Inverse multiplexing for ATM | NN10600-730 <i>Nortel Multiservice Switch 7400/15000/20000 Operations: Inverse Multiplexing for ATM</i> | Describes IMA feature, benefits, functionality, provisioning, monitoring, troubleshooting |
| Core services' connection bandwidth control (CBC) | NN10600-700 <i>Nortel Multiservice Switch 7400/15000/20000 ATM Technology Fundamentals</i> | Describes how the CBC algorithm controls the response of different ATM connections that are part of an ATM interface to a change in bandwidth over an IMA link group |
| Dynamic trunk speed changes | NN10600-420 <i>Nortel Multiservice Switch 7400/15000/20000 Operations: Trunking</i> | Describes the speed changes on ATM trunks required to maintain a direct logical trunk connection on a permanent single hop PVC when a bandwidth change occurs on an IMA link group |
| Point-to-multipoint connections | NN10600-700 <i>Nortel Multiservice Switch 7400/15000/20000 ATM Technology Fundamentals</i> | Describes CBC requirements for point-to-multipoint connections |

IMA fully supports the orderly and predictable allocation of bandwidth within a link group using ATM quality of service as outlined in the existing traffic management contract. For more information see the following documents:

- NN10600-705 *Nortel Multiservice Switch 7400/15000/20000 ATM Traffic Management Fundamentals*
- NN10600-706 *Nortel Multiservice Switch 7400/15000/20000 ATM Traffic Shaping and Policing Fundamentals*
- NN10600-707 *Nortel Multiservice Switch 7400/15000/20000 ATM Queuing and Scheduling Fundamentals*
- NN10600-708 *Nortel Multiservice Switch 7400/15000/20000 ATM CAC and Bandwidth Fundamentals*

IMA supports existing ATM features and services. For example:

- ATM bearer service
- ATM logical trunks (AAL5), including ATM direct adjacent trunks
- Circuit Emulation (AAL1)
- ATM multiprotocol encapsulation (MPE)



- Frame Relay over ATM

IMA includes support for

- Multiservice Switch services that can be carried over ATM (Services related to voice transport, voice networking, and transparent data are supported by Multiservice Switch 7400, Multiservice Switch 15000, and Multiservice Switch 20000 nodes.)
- ATM connections such as PVCs, soft PVCs, and SVCs.

Attention: These lists of features supported by IMA are not comprehensive. Features are added in each Multiservice Switch release.

Function processors supporting IMA

For information on which FPs support IMA, see NN10600-551 *Nortel Multiservice Switch 7400/15000/20000 FP Configuration Reference*.

IMA link groups and independent links

The individual ports on some Nortel Multiservice Switch FPs and the DS1 logical links on other FPs can be configured for IMA functionality as follows:

- IMA links (part of an IMA link group), or
- independent (stand-alone) links

When using independent links, each individual link must be associated with an *AtmIf* component. When using IMA, one *AtmIf* component is defined for each IMA link group. See [IMA configuration \(page 9\)](#) for details on how to configure IMA link groups, and a mixed configuration of IMA link groups and independent physical links.

No traffic losses occur with ATM Forum IMA when you add physical or logical links. In the case of removal of such links, if there is sufficient bandwidth on the remaining links, there will be no traffic loss. Likewise, you can remove or add physical or logical links without tearing down the link group or the ATM interface being served by the IMA link group. The failure of one physical or logical link has no effect on the remaining links in the IMA link group (if there is sufficient bandwidth on the remaining physical or logical links), except that overall throughput is reduced over the IMA link group. In addition, you can engineer an IMA link group such that if a physical link fails, service over many ATM connections served by the link can be maintained at a reduced capacity. Specifically, you can designate ATM direct logical trunks using single hop permanent virtual connections (PVCs) as *elastic* connections that continue service if the capacity available to the connection changes due to a change in IMA group capacity. If IMA bandwidth is reduced, you can configure a direct trunk connection to continue at the reduced throughput or be released.



For information on the provisioning configurations for the function processors, see the following sections:

- [Provisioning configurations for the 8-port DS1/E1 ATM function processors \(page 86\)](#)
- [Provisioning configurations for the 32-port DS1/E1 Multiservice Access function processors \(page 86\)](#)
- [Provisioning configurations for the 4-port DS3Ch ATM function processor \(page 88\)](#)
- [Provisioning configurations for the 2-port STM-1 electrical channelized CES/ATM/IMA function processor \(page 88\)](#)
- [Provisioning configurations for the 2-port STM-1 optical channelized CES/ATM/IMA function processor \(page 88\)](#)

Provisioning configurations for the 8-port DS1/E1 ATM function processors

The 8-port DS1/E1 ATM FPs for Nortel Multiservice Switch 7400 nodes support

- up to eight IMA link groups per FP with each link group servicing a separate ATM interface
- up to eight physical links per IMA link group
- up to eight independent links per FP
- a mixture of IMA groups and independent links running simultaneously on an FP

Provisioning configurations for the 32-port DS1/E1 Multiservice Access function processors

For the purpose of IMA configuration, consider the 32 ports as divided into two 16-port blocks. The lower port block includes ports 0 through 15, and the upper port block includes ports 16 through 31.

Characteristics and special considerations for configuring IMA on MSA32 are provided in the following points.

- On the 32-port DS1 Multiservice Access (MSA32) function processors (FPs), a maximum of 15 ports can be used for IMA in each port block, if the number of IMA link groups on that port block is 7 or less.
- On the E1 MSA32 FPs, a maximum of 14 ports can be used for IMA in each port block, if the number of IMA link groups on that port block is 7 or less.
- On the DS1 and E1 MSA32 a maximum of 13 ports can be used for IMA in each port block, if each IMA port is in its own IMA link group (13 ports



in 13 groups). Note it is supported but not typical to have single-link IMA groups.

- When IMA is deployed in a port block, other services (for example, frame relay and circuit emulation) should not be used on that port block.
- Each IMA link group may have up to eight ports.
- All ports in an IMA link group must be in the same port block.
- In the lower port block, any combination of ports can be included in an IMA link group; the link instance to which each port is associated is in the range of 0 through 15.
- In the upper port block, any combination of ports can be included in a link group; the link instance to which each port is associated is in the range of 0 through 15.
- Interoperability with IMA features in Nortel Multiservice Switch Release 5.0 and later, is supported.

When configuring IMA on 32-port FPs, you can make considerations for the following:

- the number of IMA groups per port block basis
- the number of link groups across the entire FP regardless of port blocks
- the number of IMA groups for DS1 compared to E1

In general, there are no semantic limits imposed through software and configuration checks. That is, Multiservice Switch systems will not disallow provisioning 16 IMA ports per block, but that configuration will not work; some ports will fail. The network operator must be aware of and follow the above rules, such as maximum 14 E1 or 15 DS1 IMA ports per port block.

Provisioning configurations for the 8-port DS1/E1 Multiservice Access function processors

Characteristics and special considerations for configuring IMA on DS1 and E1 MSA8 FPs are as follows:

- When IMA is deployed in a port block, other services (for example, frame relay and circuit emulation) should not be used on that port block.
- Each IMA link group may have up to eight ports.
- All ports in an IMA link group must be in the same port block.
- In the lower port block, any combination of ports can be included in an IMA link group.

Consider the following when configuring IMA on DS1 and E1 MSA8 FPs:

- the number of IMA groups per port block basis



- the number of link groups across the entire FP regardless of port blocks
- the number of IMA groups for DS1 compared to E1

Provisioning configurations for the 4-port DS3Ch ATM function processor

The 4-port DS3Ch ATM FP for Nortel Multiservice Switch 15000 and Multiservice Switch 20000 nodes support

- up to four physical links per FP
- up to 28 DS1 logical links per DS3 port
- up to 14 IMA link groups per DS3 port
- up to 56 IMA link groups per channelized FP (14 IMA link groups x 4 ports)
- up to 112 independent links (28 DS1 channels for each of the four DS3 ports) per channelized FP
- a mixture of IMA link groups and independent links running simultaneously on an FP

Provisioning configurations for the 2-port STM-1 electrical channelized CES/ATM/IMA function processor

The 2-port STM-1 electrical channelized CES/ATM/IMA FP for Nortel Multiservice Switch 7400 nodes supports

- up to 2 physical links per FP
- transport of ATM cell streams at rates between E1 and 32 x E1
- link group sizes in the range of 1 to 32 E1 links
- up to 57 IMA link groups per port
- a mixture of IMA link groups and independent links running simultaneously on an FP

Provisioning configurations for the 2-port STM-1 optical channelized CES/ATM/IMA function processor

The 2-port STM-1 optical channelized CES/ATM/IMA FP for Nortel Multiservice Switch 7400 nodes supports

- up to 2 optical ports per FP
- transport of ATM cell streams at rates between E1 (2.048 Mbit/s) and 32 x E1
- link group sizes in the range of 1 to 32 E1 links
- up to 57 IMA link groups per port
- a mixture of IMA link groups and independent links running simultaneously on an FP



IMA protocols

Multiservice Switch IMA software supports the ATM Forum IMA protocol.

Applicability

For the 8-port DS1/E1 function processors, Nortel Multiservice Switch systems support the ATM Forum IMA. Multiservice Switch IMA services running on the 32-port DS1/E1 Multiservice Access (MSA32) FP, the 8-port DS1/E1 Multiservice Access (MSA8) FP, and the 4-port DS3Ch ATM FP support the ATM Forum IMA protocol 1.0. The 2-port STM-1 electrical channelized CES/ATM/IMA FP and the 2-port STM-1 optical channelized CES/ATM/IMA FP support the ATM Forum IMA protocol version 1.1 and 1.0. These FPs can only be provisioned with IMA 1.1 but they automatically downgrade to 1.0 if the far end node is using IMA 1.0.

ATM Forum IMA protocol

The ATM Forum IMA protocol, supported in Nortel Multiservice Switch release 5.0 and later, provides interoperability with equipment compliant with the ATM Forum *Inverse Multiplexing for ATM (IMA) Specification*. Future enhancements to Multiservice Switch system's IMA product will be based on the ATM Forum IMA protocol.

All Multiservice Switch function processors that provide IMA services support the ATM Forum IMA protocol.

Bandwidth options using ATM

Nortel Multiservice Switch system's IMA feature permits the transfer of ATM layer cell traffic between FPs as summarized in the table [Method of transferring ATM layer cell traffic between function processors \(page 89\)](#).

Method of transferring ATM layer cell traffic between function processors

| Function processor | Product | Method |
|---------------------|---|---|
| 8-port DS1 ATM FP | Multiservice Switch 7400 | multiple DS1 physical links |
| 8-port E1 ATM FP | Multiservice Switch 7400 | multiple E1 physical links |
| 32-port DS1 MSA FP | Multiservice Switch 7400 | multiple DS1 physical links |
| 8-port DS1 MSA FP | Multiservice Switch 7400 | multiple DS1 physical links |
| 32-port E1 MSA FP | Multiservice Switch 7400 | multiple E1 physical links |
| 8-port E1 MSA FP | Multiservice Switch 7400 | multiple E1 physical links |
| 4-port DS3Ch ATM FP | Multiservice Switch 15000 and Multiservice Switch 20000 | multiple DS1 logical links on a DS3 channelized interface |
| (1 of 2) | | |



Method of transferring ATM layer cell traffic between function processors (continued)

| Function processor | Product | Method |
|---------------------------------|--------------------------|--|
| 2-port STM-1e Ch CES/ATM/IMA FP | Multiservice Switch 7400 | multiple E1 logical links on an STM1 channelized interface |
| 2pSTM1Ch CES/ATM/IMA FP | Multiservice Switch 7400 | multiple E1 logical links on an STM1 channelized interface |
| (2 of 2) | | |

Typically, the FPs are on different nodes. IMA on the 8-port DS1/E1 ATM FPs and the 32-port DS1/E1 MSA FPs bridges the gap between the throughput of a DS1/E1 ATM link and a DS3/E3 ATM link. This is useful where DS3/E3 facilities (or those with higher line speeds) are not available or cannot be justified due to cost or the volume of ATM traffic.

Typically, the FPs are on different nodes. IMA on the 8-port DS1/E1 ATM FPs, the 32-port DS1/E1 MSA FPs, and the 8-port DS1/E1 MSA FPs bridges the gap between the throughput of a DS1/E1 ATM link and a DS3/E3 ATM link. This is useful where DS3/E3 facilities (or those with higher line speeds) are not available or cannot be justified due to cost or the volume of ATM traffic.

IMA link group capacity on the 8-port DS1/E1 ATM FPs

For Nortel Multiservice Switch system's IMA feature on the 8-port DS1/E1 ATM FPs, ATM layer cell traffic between the FPs can be transferred across one to eight DS1 or E1 physical links. Bandwidth can be added to (or removed from) IMA link groups up to a maximum of eight DS1 or E1 physical links, as per network requirements. For more information, see [Provisioning configurations for the 8-port DS1/E1 ATM function processors \(page 86\)](#).

IMA technology also greatly increases the number of DS1 or E1 physical links that a Multiservice Switch 7400 node can support. Instead of up to eight ATM interfaces over eight physical links between nodes, one ATM interface can operate over eight physical links in an IMA link group. If you use four 8-port DS1/E1 ATM FPs, then you can operate up to 32 physical links (minimum of four IMA link groups) between two Multiservice Switch 7400 nodes using IMA.

For information on IMA link group capacity on the 8-port DS1/E1 ATM FPs, contact your Networks account representative.

IMA link group capacity on the 32-port DS1/E1 Multiservice Access FPs

For Nortel Multiservice Switch system's IMA feature on the 32-port DS1/E1 Multiservice Access (MSA32) FPs, ATM layer cell traffic between the FPs can be transferred across all 32 DS1 or E1 physical links. Bandwidth can be added to (or removed from) IMA link groups up to a maximum of eight DS1 or E1 physical links, as per network requirements.



Attention: These capabilities are subject to specific characteristics. See [Provisioning configurations for the 32-port DS1/E1 Multiservice Access function processors \(page 86\)](#) for more information.

For more information, see [Provisioning configurations for the 32-port DS1/E1 Multiservice Access function processors \(page 86\)](#). For information on IMA link group capacity on the MSA32 FP, contact your Networks account representative.

IMA link group capacity on the 8-port DS1/E1 Multiservice Access FPs

For Multiservice Switch system's IMA feature on the 8-port DS1/E1 Multiservice Access (MSA8) FPs, ATM layer cell traffic between the FPs can be transferred across all DS1 or E1 physical links. Bandwidth can be added to (or removed from) IMA link groups up to a maximum of eight DS1 or E1 physical links, as per network requirements.

For more information, see [Provisioning configurations for the 8-port DS1/E1 Multiservice Access function processors \(page 87\)](#). For information on IMA link group capacity on the MSA8 FP, contact your Networks account representative.

IMA link group capacity on the 4-port DS3Ch ATM FP

For Nortel Multiservice Switch system's IMA feature on the 4-port DS3Ch ATM FPs, ATM layer cell traffic can be transferred across a maximum of 28 DS1 logical links on one DS3 port. For more information, see [Provisioning configurations for the 4-port DS3Ch ATM function processor \(page 88\)](#).

For information on IMA link group capacity on the 4-port DS3Ch ATM FP, contact your Networks account representative.

IMA link group capacity on the 2-port STM-1 electrical channelized CES/ATM/IMA FP

For Nortel Multiservice Switch system's IMA feature on the 2-port STM1eCh CES/ATM/IMA FPs, ATM layer cell traffic can be transferred across a maximum of 32 E1 logical links on one SDH port. For more information, see [Provisioning configurations for the 2-port STM-1 electrical channelized CES/ATM/IMA function processor \(page 88\)](#).

IMA link group capacity on the 2-port STM-1 optical channelized CES/ATM/IMA FP

For Multiservice Switch 7400 system's IMA feature on the 2pSTM1Ch FPs, ATM layer cell traffic can be transferred across a maximum of 32 E1 logical links on one SDH port. For more information, see [Provisioning configurations for the 2-port STM-1 optical channelized CES/ATM/IMA function processor \(page 88\)](#).



Understanding IMA

Use this chapter to understand how inverse multiplexing for ATM (IMA) functions in Nortel Multiservice Switch systems, including how the key concepts associated with this feature work. The functionality presented in this section applies to the ATM Forum IMA protocol (supported on Multiservice Switch 7400, Multiservice Switch 15000, and Multiservice Switch 20000 nodes). For more information, see [IMA protocols \(page 89\)](#).

Navigation

- [IMA in the ATM layer reference model \(page 92\)](#)
- [Cell transport functionality using IMA \(page 94\)](#)
- [IMA framing and control \(page 98\)](#)
- [Link capacity within an IMA link group \(page 102\)](#)
- [IMA link states \(page 102\)](#)
- [Internal procedures for IMA link configuration \(page 102\)](#)
- [Adding inactive links to an IMA link group \(page 103\)](#)
- [Compensating for asynchronous physical links \(page 104\)](#)
- [Transmit clock mode \(page 105\)](#)
- [Compensating for differential delay \(page 109\)](#)
- [ATM IMA service reliability on Multiservice Switch for Succession Networks \(page 112\)](#)
- [ATM IMA service operation after line switchovers on Multiservice Switch \(page 114\)](#)
- [ATM control channel failure on IMA \(page 114\)](#)
- [IMA configuration considerations \(page 114\)](#)

IMA in the ATM layer reference model

The figure [IMA in the ATM layer reference model \(page 94\)](#) shows how IMA fits into a standard ATM layer reference model. For speed and efficiency, IMA functionality is accomplished entirely at the physical layer. The transmission convergence sublayer handles the interaction between the ATM layer and



IMA. This sublayer is divided into the IMA specific part and the interface specific part; these parts interwork with the physical medium dependent sublayer to perform full IMA functionality.

- IMA specific part (transmission convergence sublayer) - controls the actual inverse multiplexing functionality, such as the distributing and combining of the ATM cell stream, cell rate decoupling, IMA synchronization, compensation for differential delay, and physical link monitoring and control

Attention: The process used by IMA to transmit the ATM cell stream is transparent to the ATM layer

- interface specific part (transmission convergence sublayer) - controls the ATM-specific functions of the DS1 or E1 or DS3 physical interface, such as header error control (HEC), cell delineation and cell scrambling/de-scrambling
- physical medium dependent sublayer - controls the transmission of data on the E1/DS1 or DS3 physical links


IMA specific functionality is performed in a cell processing logic block called the IMA cell machine, available in FPs that support the IMA feature. The IMA cell machine

- handles the sequencing of cells when the links are active
- detects any link failures or status changes and reports them to the software
- generates ICP, filler and stuff cells

IMA software configures each individual link in an IMA link group and determines those recognized by the IMA application at the far end FP as being part of that IMA link group.



IMA in the ATM layer reference model

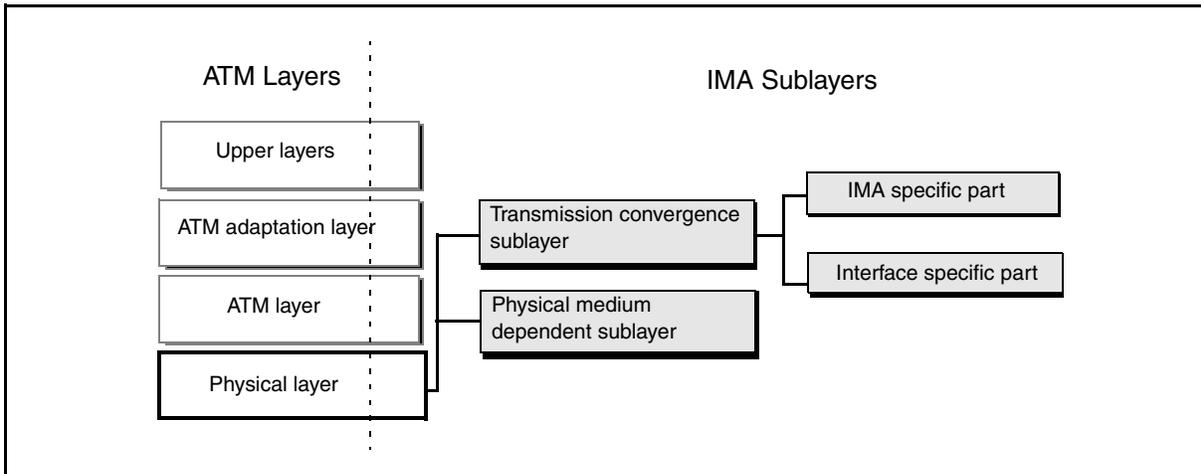


Cell transport functionality using IMA

The figures [An IMA link group between two 8-port DS1/E1 ATM FPs supporting IMA \(Multiservice Switch 7400 node\) \(page 95\)](#) and [IMA link groups between two 4-port DS3Ch ATM FPs supporting IMA \(Multiservice Switch 15000 and Multiservice Switch 20000 nodes\) \(page 96\)](#), illustrate the concept of inverse multiplexing. In each figure, a FP running IMA in Multiservice Switch A receives a single stream of cell traffic from the ATM layer and transparently distributes the individual cells in a round-robin fashion along multiple links within an IMA link group or groups. The FP running IMA in Multiservice Switch B re-aggregates the cell stream at the receiving end of the link stream on a cell-by-cell basis, preserving the original cell order and format.




An IMA link group between two 8-port DS1/E1 ATM FPs supporting IMA (Multiservice Switch 7400 node)

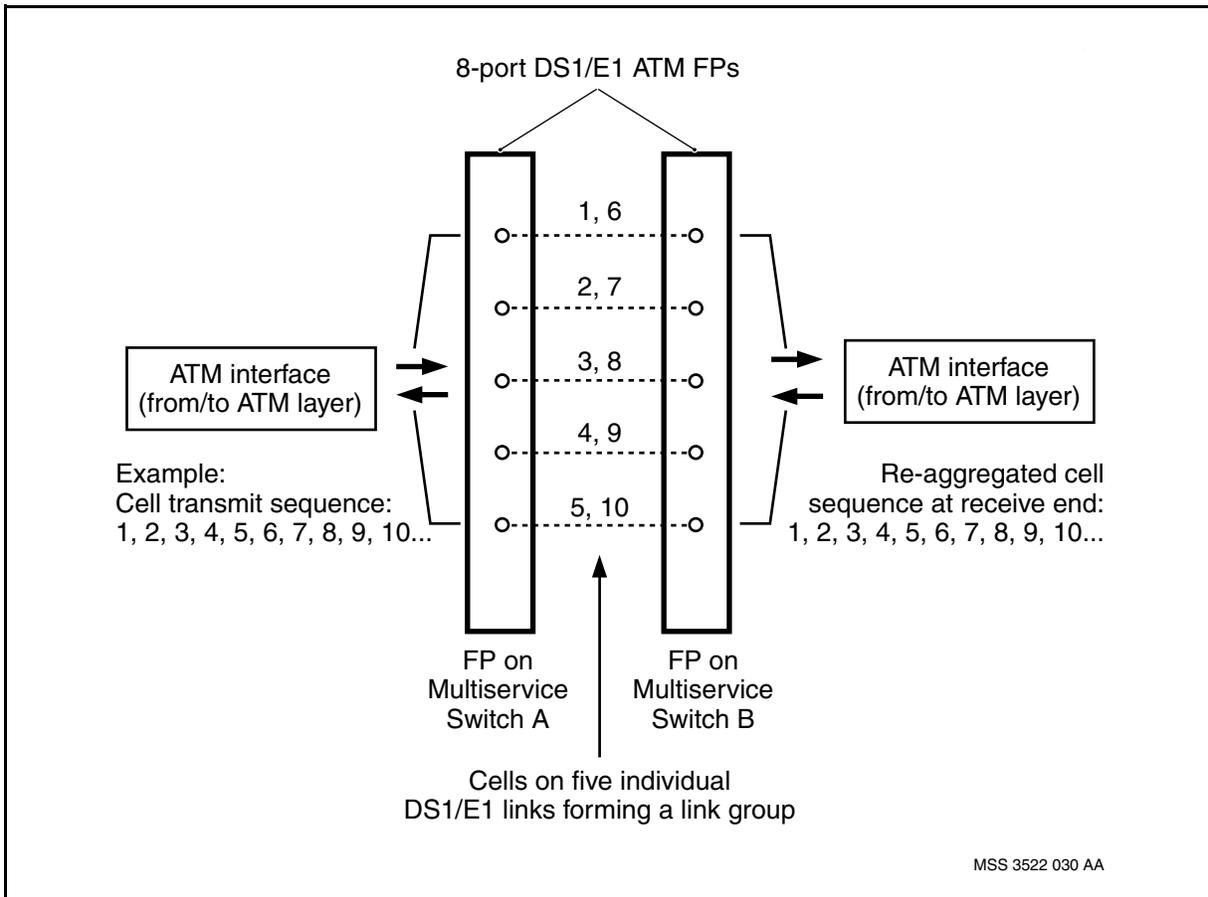




IMA link groups between two 4-port DS3Ch ATM FPs supporting IMA (Multiservice Switch 15000 and Multiservice Switch 20000 nodes)

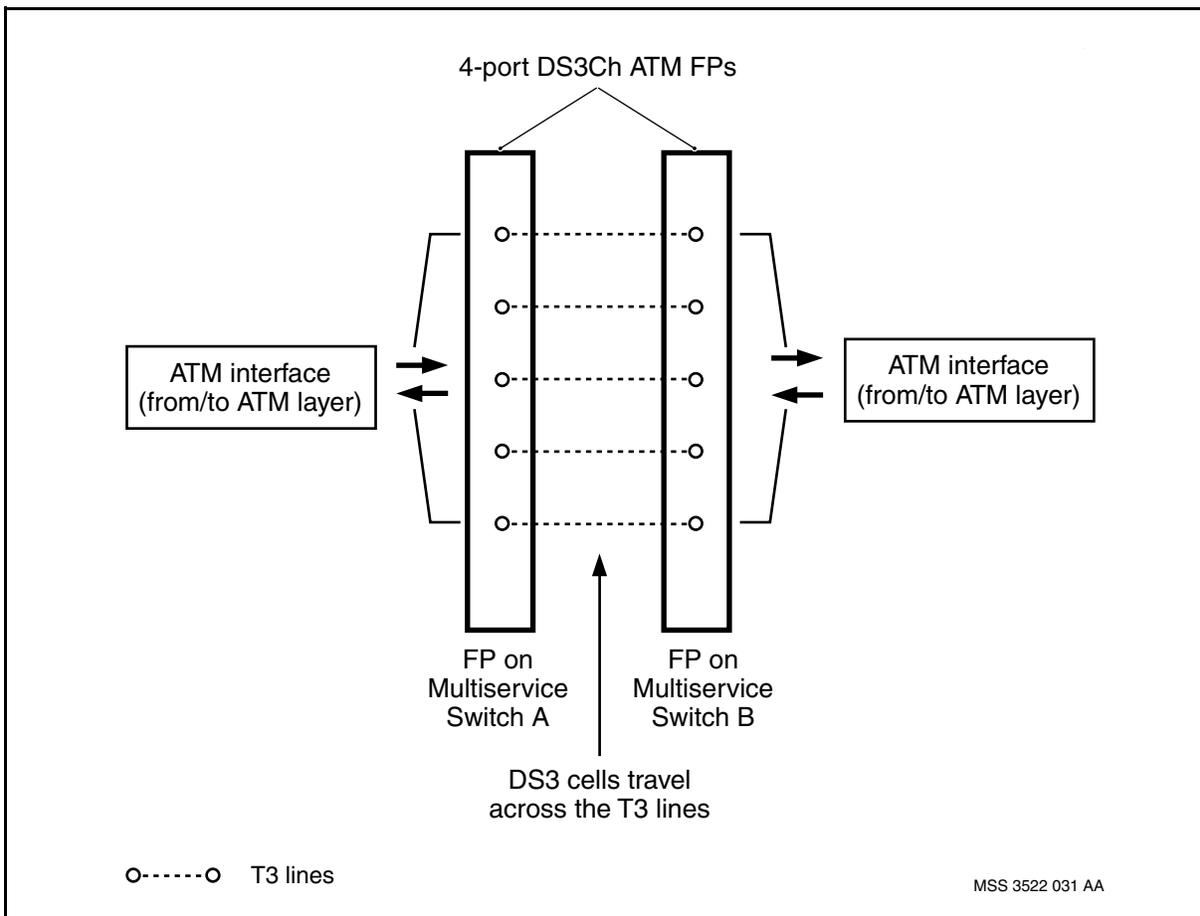

The figure [Detailed view of multiple IMA link groups between two 8-port DS1/E1 ATM FPs \(Multiservice Switch 7400 node\) \(page 97\)](#) illustrates how the IMA feature distributes and combines an ATM layer cell sequence over multiple IMA link groups. Each IMA link group is associated with an ATM interface. The stream of cell traffic is distributed in a round-robin fashion over each physical link in the IMA link group. For example, the cell stream for IMA link group 0 is distributed over the three links in its group. IMA link group 2 contains only one physical link; therefore, its cell sequence is unchanged from the incoming transmit sequence.




Detailed view of multiple IMA link groups between two 8-port DS1/E1 ATM FPs (Multiservice Switch 7400 node)

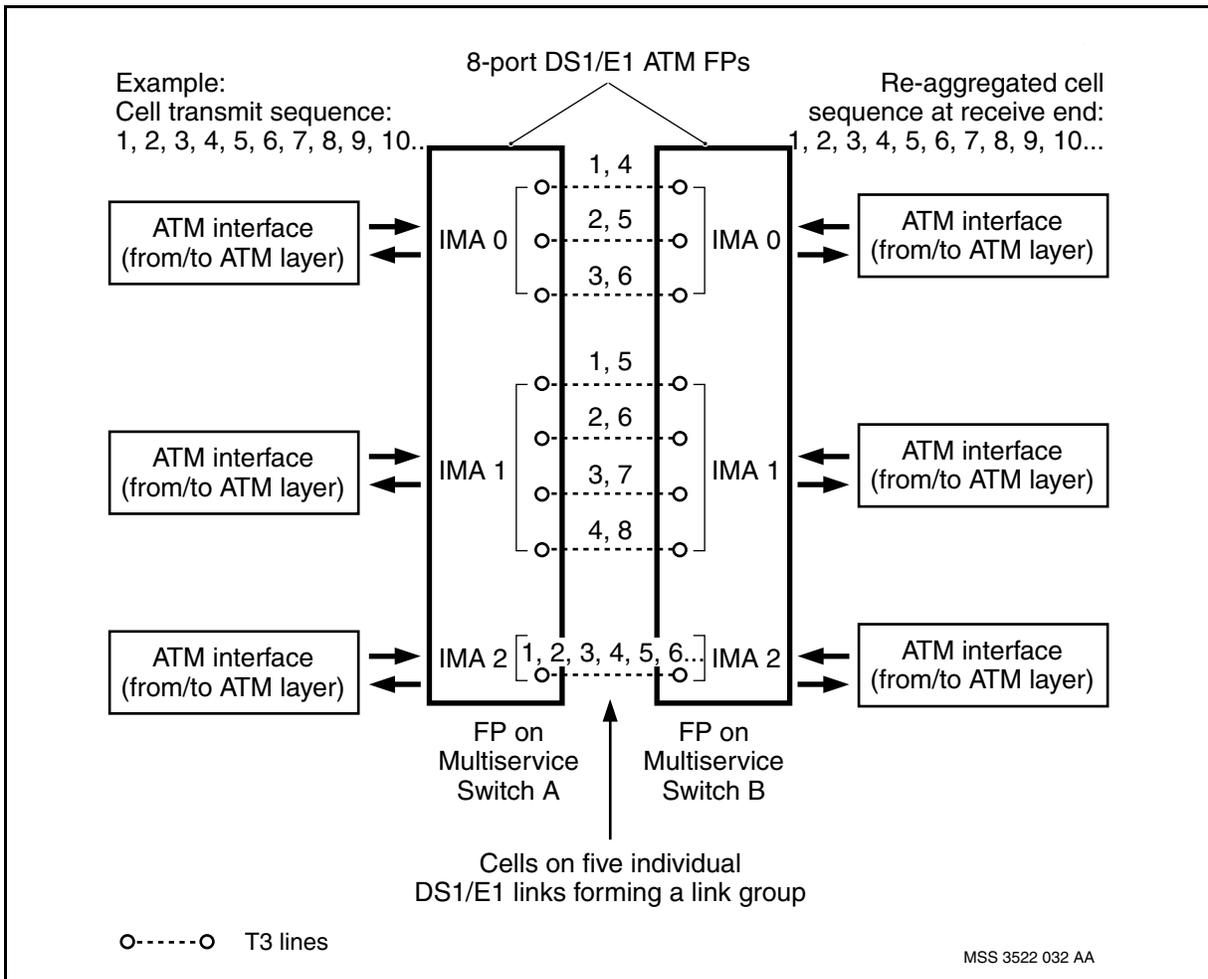

The figure [Detailed view of multiple IMA link groups and independent links forming in a 4-port DS3Ch ATM FP \(Multiservice Switch 15000 and Multiservice Switch 20000 nodes\) \(page 98\)](#) illustrates how the IMA feature distributes and combines ATM layer cell sequences over multiple IMA link groups and independent links. Cell traffic from the ACM2 processor running IMA is multiplexed from DS1 to DS3 format and is shunted out of the FP on the DS3 ports. The flow is bidirectional: in the opposite direction, cell traffic is demultiplexed from DS3 to DS1 format.



Detailed view of multiple IMA link groups and independent links forming in a 4-port DS3Ch ATM FP (Multiservice Switch 15000 and Multiservice Switch 20000 nodes)

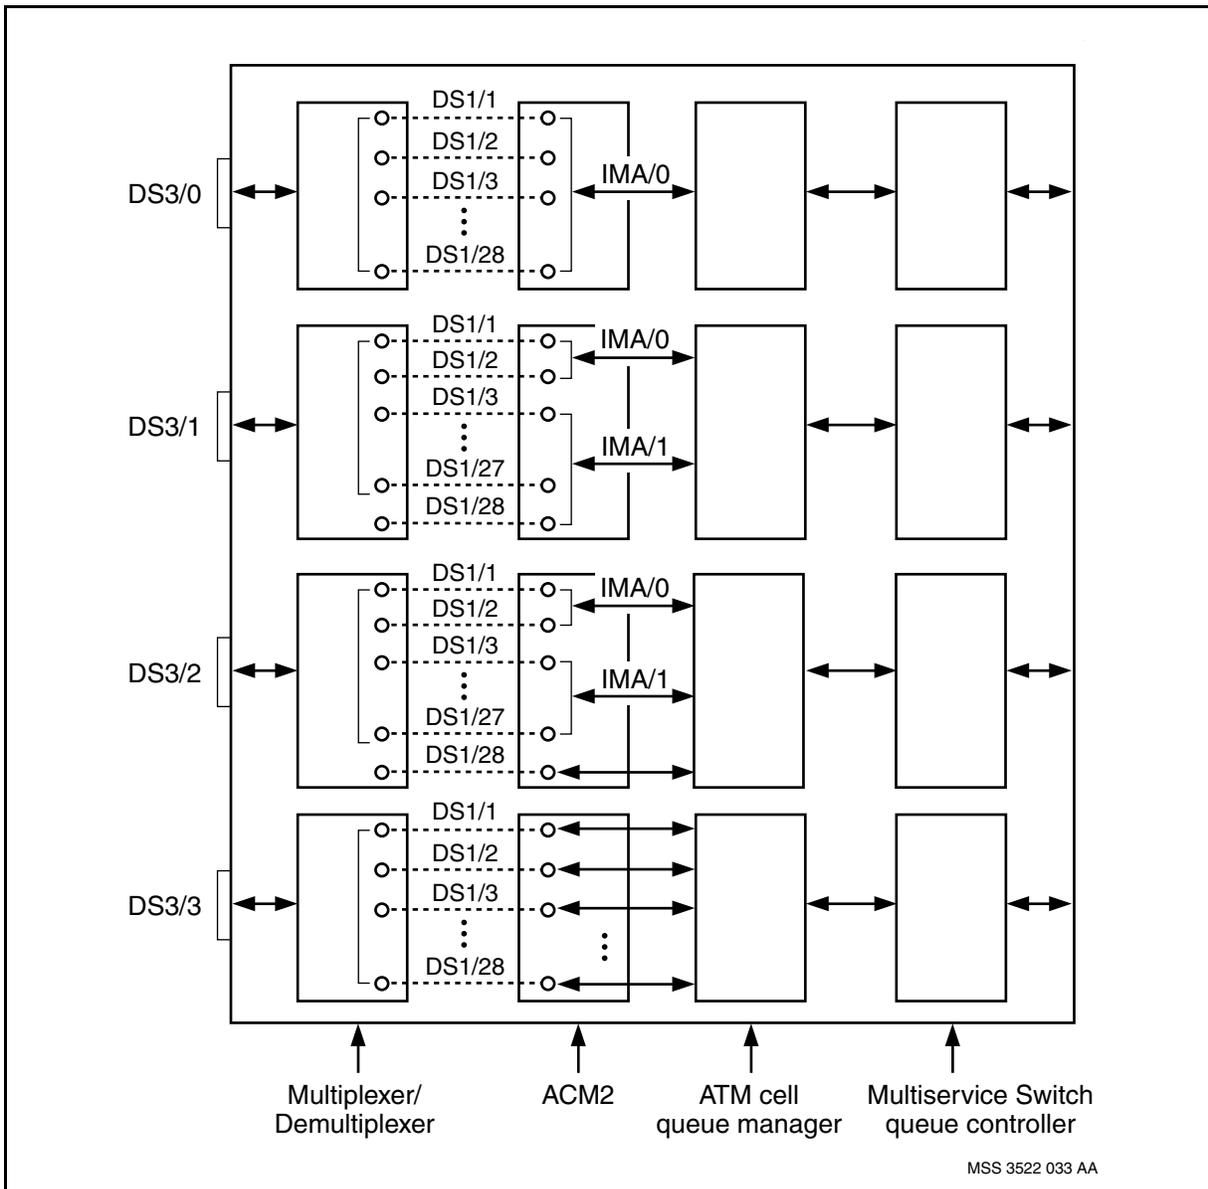

IMA framing and control

IMA control protocol (ICP) cells, one of two types of operations and maintenance (OAM) cells used with IMA, control the distribution of ATM cells over an IMA link group.

ICP OAM cells perform two basic functions:

- maintain synchronization on a link and facilitate the determination of differential delay between links




- convey IMA configuration and status information

ATM cells being transmitted over a link are apportioned into frames containing 128 cells, permitting the insertion of one ICP cell within each frame on a physical link. Each ICP cell appears in a different position within a frame on different links within the IMA link group, but in the same position from frame-to-frame on any given link.

ICP cell distribution

The figure [Example of IMA framing and ICP cell distribution on a link group \(page 99\)](#) shows an example of the distribution of ICP cells over different physical links or logical links within an IMA link group. To simplify the example, the transmission of cells is shown only from Multiservice Switch B to Multiservice Switch A. For example, on link 0 in the figure [Example of IMA framing and ICP cell distribution on a link group \(page 99\)](#), the ICP cell always appears as the first cell in each frame; on link 1, the ICP cells always appear as the fourth cell in each frame.

Example of IMA framing and ICP cell distribution on a link group

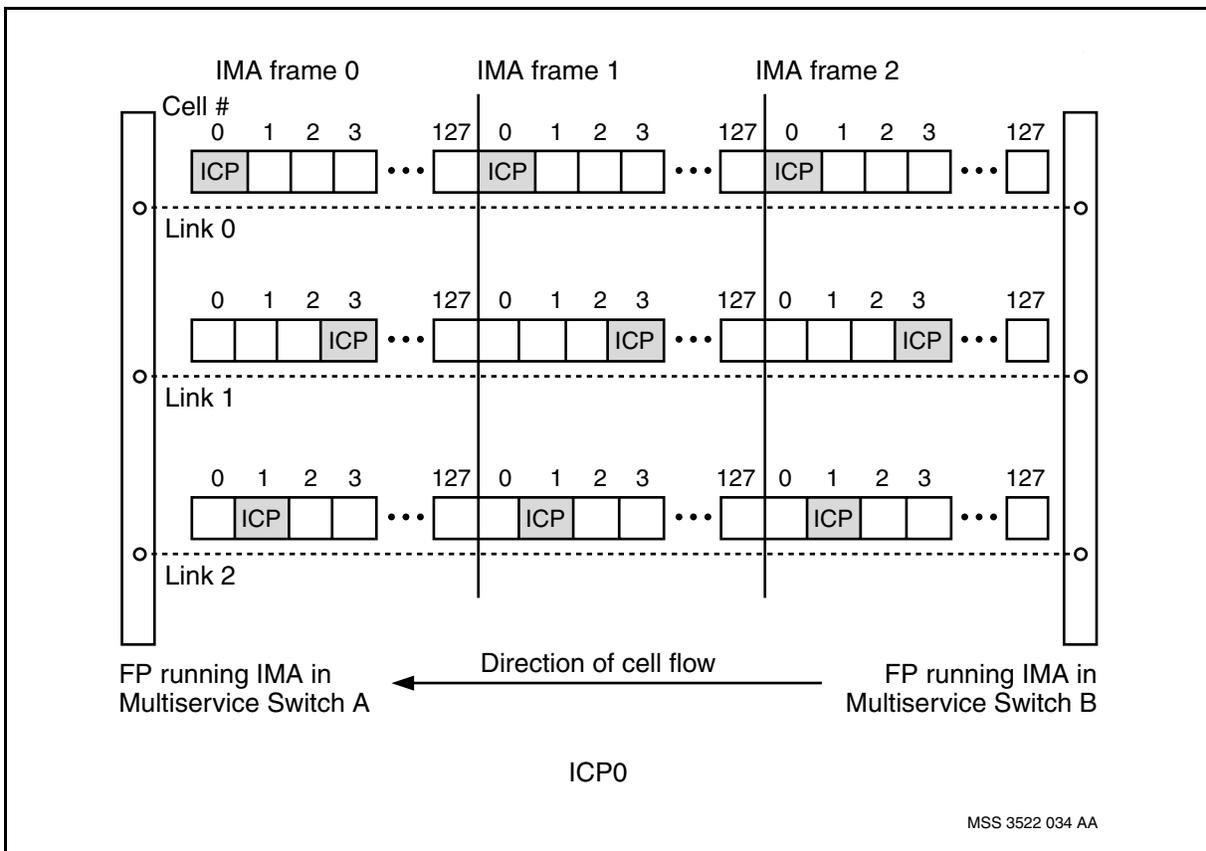




ICP cell contents

ICP cells contain information on the cell, the IMA frame, the physical link, the IMA link group, and the individual links. Two ICP cell formats appear in this section. For IMA services on the 1-port STM1 ATM FPs, 8-port DS1/E1 ATM FPs, the 32-port DS1/E1 Multiservice Access (MSA32) FPs, the 8-port DS1/E1 Multiservice Access (MSA8) FPs and the 4-port DS3Ch ATM FP, Multiservice Switch systems support only the ATM Forum IMA protocol. For more information on IMA protocols, see IMA protocols (page 89).

The figure [Contents of an ATM Forum IMA protocol ICP cell on all Multiservice Switch FPs supporting IMA \(page 101\)](#) shows the contents of an ATM Forum protocol ICP cell



Contents of an ATM Forum IMA protocol ICP cell on all Multiservice Switch FPs supporting IMA

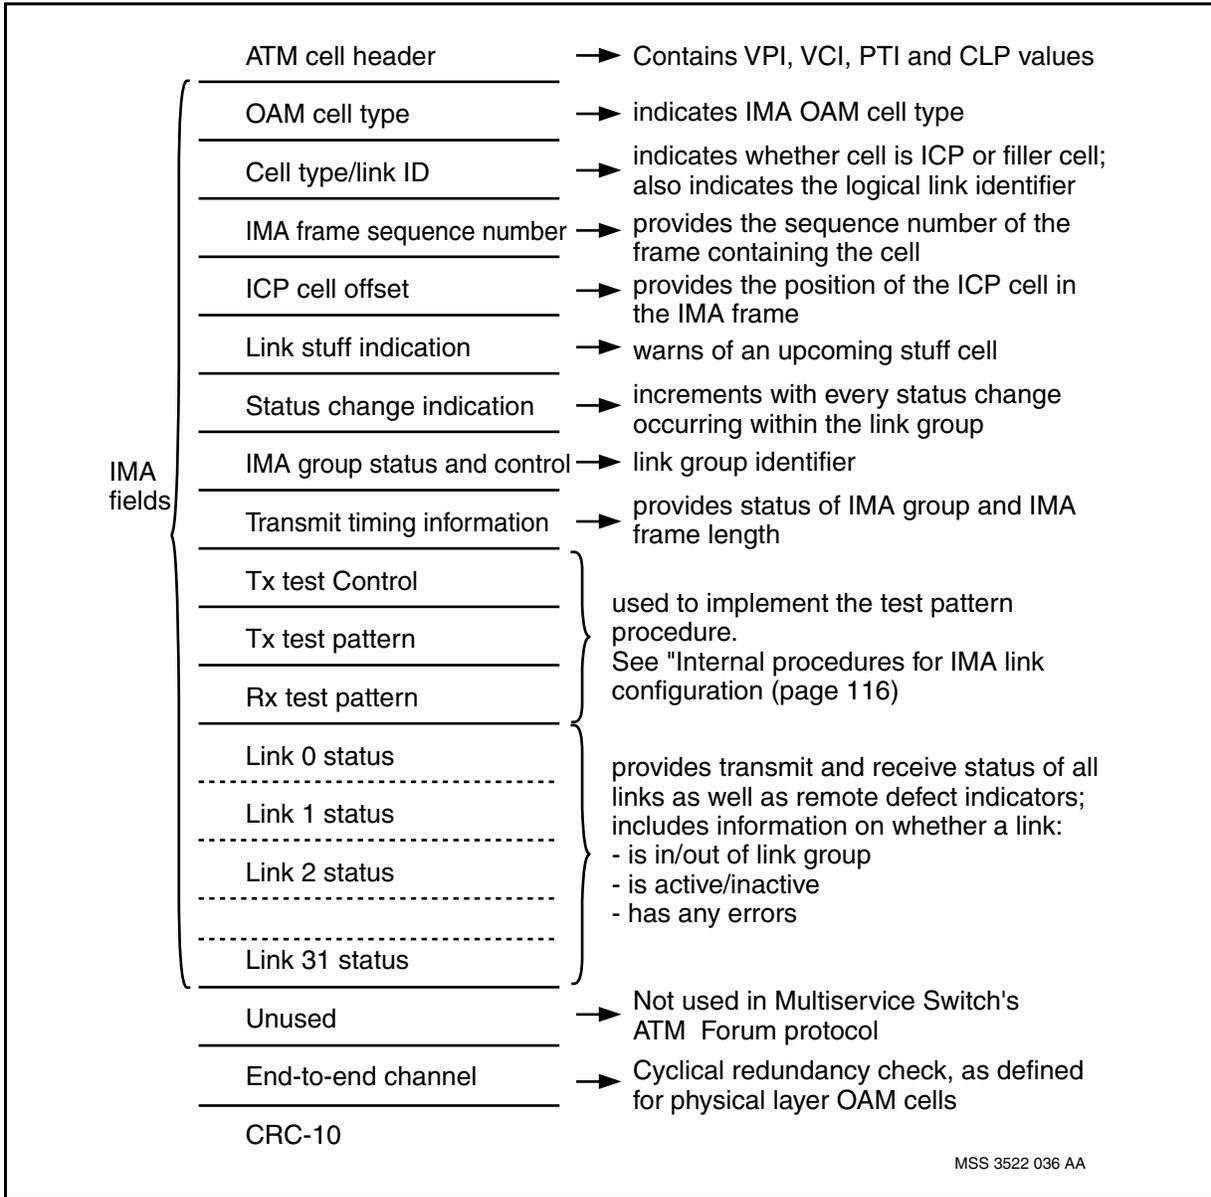

Cell rate decoupling using filler cells

Cell rate decoupling guarantees that the physical links in an IMA link group continue to transmit cells when there are not enough user cells available to saturate the links. The decoupling process injects an OAM type filler cell to satisfy the cell rate requirement on each physical link. These filler cells are required any time there is a cell transmit opportunity on a physical link, but no cells are available from the ATM interface.

Attention: Filler cells are the IMA equivalent to physical layer idle cells.



The IMA cell machine generates filler cells at the transmit side of a link and removes them on the receive side. Filler cells are actually blank ICP cells; the cell type and link ID field indicates whether an ICP cell is a filler cell or not. If a cell is a filler cell, then the remaining ICP fields are empty.

Link capacity within an IMA link group

The process of IMA framing and control slightly reduces the capacity of individual physical links in an IMA link group to transmit cells. Also, link capacity can differ between IMA link groups depending on the IMA protocol used.

For more information on IMA link group capacity, contact your Nortel Networks account representative.

IMA link states

IMA groups on different nodes communicate link status information by using ICP cells to signal to the far-end IMA link group. Communication between IMA groups is established by a handshaking sequence that occurs between both ends of the link group. For details, see [Internal procedures for IMA link configuration \(page 102\)](#). The figure [Contents of an ATM Forum IMA protocol ICP cell on all Multiservice Switch FPs supporting IMA \(page 101\)](#) show the link status fields in an ICP cell.

Internal procedures for IMA link configuration

This section summarizes the link configuration procedures that are defined internally to the IMA process, based on how IMA is configured at both ends of a link group. They are executed transparently to users after configuring IMA on Nortel Multiservice Switch FPs at the near and far end of the IMA link group:

- IMA link group startup - a handshaking sequence occurring between the two ends of a link group; permits each end of the link to resolve their respective link identifiers (LIDs) and verify connectivity
- link addition (to an IMA link group) - as a result of provisioning at both ends of a link group
- link deletion (from an IMA link group) - as a result of provisioning at either end of a link group
- link deactivation (from an IMA link group) - due to a fault on a link or a violation of the IMA protocol

For example, the differential delay of one link relative to its peers in a IMA link group may increase such that the link must be removed from the link group (See [Compensating for differential delay \(page 109\)](#).)



- link reactivation (as part an IMA link group) - due to the recovery of a link from a fault on the link or from a violation of the IMA protocol

For example, the differential delay of one link relative to its peers in a link group may decrease such that the link can be re-admitted to the link group.

Only the ATM Forum IMA protocol uses the test pattern procedure as specified in *Inverse Multiplexing for ATM (IMA) Specification*. This procedure is used during link group startup, link addition and link reactivation to determine if there are any links in the IMA link group that are misconnected. If a link is determined to be misconnected, it is not activated in the IMA link group.

Adding inactive links to an IMA link group

The IMA application incorporates a process to determine how often it will attempt to admit inactive links to an IMA link group. A user can control the amount of time that the IMA application waits between attempts to add inactive links to a link group by setting the *linkRetryTimeout* attribute. This attribute can be assigned a value anywhere between 0 and 1000 seconds, with the default value of 10 seconds. The process of attempting to add inactive links itself takes a few seconds because of the protocol involved.

Attention: The *linkRetryTimeout* attribute is not a configurable attribute when using the 32-port DS1/E1 Multiservice Access (MSA32) FP or the 8-port DS1/E1 Multiservice Access (MSA8) FP. It is always set to the default value, 1 second.

The different conditions specified in the following list determine the response of the IMA application when there are inactive links in an IMA link group:

- after the startup procedure
- when the IMA link group is functioning
- after the link addition and reactivation procedure

After the startup procedure

If the Startup procedure is successful but not all links in an IMA link group are active, the IMA application waits the amount of time specified by the *linkRetryTimeout* attribute before invoking the link addition and reactivation procedure for all inactive links in the link group.

When the IMA link group is functioning

If an IMA link group is functioning with all configured links active, the IMA application will initiate the link addition and reactivation procedure when

- a link fails; this may occur due to the physical link going down, a loss of IMA frame (LIF) failure, or a remote link failure.



- a loss of delay synchronization (LODS) failure occurs in an IMA link group (for details, see [Ongoing monitoring of differential delay \(page 110\)](#))
- a configuration change is made that either
 - adds or deletes links, or
 - modifies the provisionable attributes *maxDiffDelay* or *linkSelectionCriterion*

For details on these attributes, see NN10600-060 *Nortel Multiservice Switch 7400/15000/20000 Component Reference*. For a discussion of differential delay, see [Compensating for differential delay \(page 109\)](#).

After the link addition and reactivation procedure

If not all links in the IMA link group are active upon the completion of the link addition and reactivation procedure (whether a link has been added or not), the IMA application waits the amount of time specified by the *linkRetryTimeout* attribute before invoking the link addition and reactivation procedure for all inactive links in the link group.

Compensating for asynchronous physical links

Cell stuffing is a technique used to maintain IMA synchronization in link groups containing asynchronous physical links. Line clock rates over different links that derive their clock from different sources can vary up to 100 ppm due to the frequency tolerance of clock generators permitted in the DS1/E1 physical layer standards.

Attention: This is not the same issue as differential delay discussed in [Compensating for differential delay \(page 109\)](#).

Attention: Cell stuffing to compensate for asynchronous physical links is used by IMA link groups in independent transmit clock (ITC) mode only. For details on clock mode and IMA link groups, see [Transmit clock mode \(page 105\)](#).


To prevent the physical link from being starved of ATM cells, stuff cells are inserted on physical links in an IMA link group that are operating at a faster clock rate than the slowest link. Stuff cells are added by the IMA cell machine on an FP running IMA after round-robin cell distribution has occurred at the transmit side of a link group. A stuff cell is merely a copy of an ICP cell and always follows immediately after an ICP cell in an IMA frame. The “link stuff indication” field of an ICP cell indicates to the remote end the location of the stuff cell (see the figure [Contents of an ATM Forum IMA protocol ICP cell on all Multiservice Switch FPs supporting IMA \(page 101\)](#)).



Cell stuffing prevents the physical layer interface from inserting idle cells to compensate for differences in clock synchronization, which would disrupt the IMA process.

For example, in the figure [Example of cell stuffing to preserve the order of cells over links running at different speeds \(page 105\)](#), physical links 0 and 1 are part of the same IMA link group. It is evident by IMA frame 17 that link 0 is running slightly faster than link 1. By frame 35, a stuff cell is added to re-synchronize the cells on the two links. Cell stuffing occurs as required to align the cells on different links in a link group.

Example of cell stuffing to preserve the order of cells over links running at different speeds

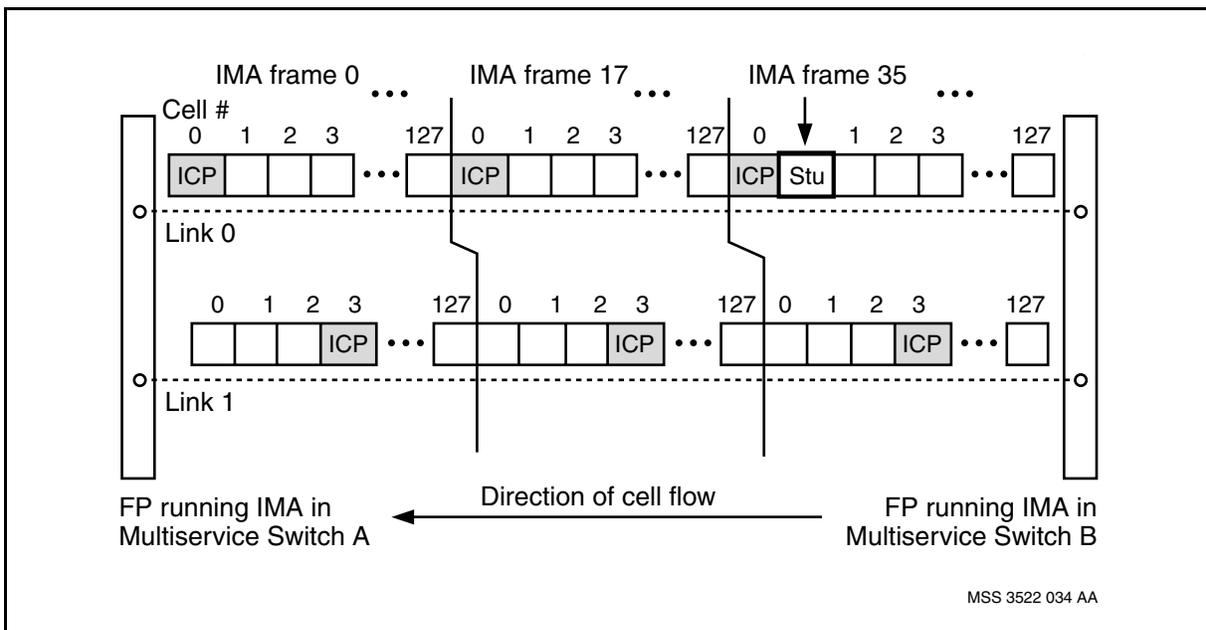

Transmit clock mode

There are two modes of transmit clocking on IMA link groups, as specified in *Inverse Multiplexing for ATM (IMA) Specification*:

- Common transmit clock (CTC) mode
- Independent transmit clock (ITC) mode

In CTC mode, the same transmit clock reference is used for all physical links in the IMA link group. In ITC mode, the transmit clock may be derived from different references on one or more physical links in the IMA link group. The following table [Transmit clock mode supported by the IMA protocol in Multiservice Switch systems \(page 106\)](#) indicates the transmit clock modes supported by the ATM Forum protocol.



Transmit clock mode supported by the IMA protocol in Multiservice Switch systems

| | | Transmit clock mode supported by: |
|---|---|--|
| Function processor | Product | ATM Forum IMA protocol |
| 8-port DS1 ATM FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| 8-port E1 ATM FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| 2-port STM1eCh CES/ATM/IMA FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode |
| 2pSTM1Ch CES/ATM/IMA FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode <p>The 2pSTM1Ch FP implements only CTC for both ITC and CTC modes. However, the IMA transmitter may indicate ITC mode when all of its clock sources are the same.</p> |
| 32-port DS1 MSA FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| 8-port DS1 MSA FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| 32-port E1 MSA FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| 8-port E1 MSA FP | Multiservice Switch 7400 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| 4-port DS3Ch ATM FP | Multiservice Switch 15000 and Multiservice Switch 20000 | <ul style="list-style-type: none"> • CTC mode • ITC mode |
| <p>Multiservice Switch system's implementation of ITC mode using the ATM Forum protocol differs from that specified in <i>Inverse Multiplexing for ATM (IMA) Specification</i>. For details, see Multiservice Switch implementation of ITC mode (page 108).</p> | | |

The technique of cell stuffing to compensate for asynchronous physical links is used only by IMA link groups in independent transmit clock (ITC) mode. When common transmit clock (CTC) mode is used, there are no differences in the clock rate used by different physical links. Therefore, no cell stuffing is required to maintain clock synchronization. However, to comply with the *Inverse Multiplexing for ATM (IMA) Specification*, cell stuffing occurs in CTC mode every 2 048 cells transmitted on each link in the IMA link group.



Common transmit clock (CTC) mode

CTC mode is supported on the ATM Forum IMA protocol for IMA services provided through the 8-port DS1/E1 FP, the 32-port DS1/E1 Multiservice Access (MSA32) FP, the 8-port DS1/E1 Multiservice Access (MSA8) FP, the 2-port STM-1 electrical channelized CES/ATM/IMA FP, and 2-port STM-1 optical channelized CES/ATM/IMA FP (see the table [Transmit clock mode supported by the IMA protocol in Multiservice Switch systems \(page 106\)](#)). When using this mode, the operator must ensure that all links in the IMA link group use the same transmit clock. For example, all physical links could use a clocking source of

- module
- line (if the transmit clocks at the far end are all derived from the same source)

Attention: The 2pSTM1Ch FP implements only CTC for both ITC and CTC modes. However according to the ATM Forum specification O-10, the IMA transmitter may indicate ITC mode when all of its clock sources are the same.

If you are using CTC mode, and not all links in an IMA link group use the same transmit clock reference, corruption or loss of data may occur. If you use the module clocking source, clocking will be synchronous across all ports.

Nortel Multiservice Switch systems insert a stuff event after every 2 048 cells transmitted on each link in an IMA link group using CTC mode, as described in ATM Forum *Inverse Multiplexing for ATM (IMA) Specification*. Cell stuffing to compensate for timing differences between links is suppressed in CTC mode.

Attention: For information on network clock synchronization, see NN10600-550 *Nortel Multiservice Switch 7400/15000/20000 Common Configuration Procedures*.

Independent transmit clock (ITC) mode

IMA services on any Nortel Multiservice Switch function processor providing IMA capability supports the ITC mode on the ATM Forum IMA protocol. See the table [Transmit clock mode supported by the IMA protocol in Multiservice Switch systems \(page 106\)](#).

If ITC mode is used, links in the IMA link group may use the same or different transmit clock references, provided the clock tolerance on each link is within 50 ppm (the maximum specified by the DS1). IMA link groups configured to



operate in ITC mode use cell stuffing as a technique for maintaining IMA synchronization. For a description of cell stuffing, see [Compensating for asynchronous physical links \(page 104\)](#)

In a typical ITC mode configuration, all physical links use a clocking source of line and the clocks on the incoming links are derived from different references.

Attention: For information on network clock synchronization, see NN10600-550 *Nortel Multiservice Switch 7400/15000/20000 Common Configuration Procedures*.

Multiservice Switch implementation of ITC mode

Nortel Multiservice Switch system implementation of ITC mode is different from what is specified in the ATM Forum *Inverse Multiplexing for ATM (IMA) Specification*. The specification states that a stuff event is to be inserted on the transmit reference link after every 2 048 cells transmitted on the link. Stuff events are inserted on the other links in an IMA link group, as required, to keep them synchronized with the transmit reference link.

In ITC mode, Multiservice Switch systems do not insert stuff events on the transmit reference link after every 2 048 cells. Instead, it synchronizes all links in the IMA link group to the slowest link in the link group (see [Compensating for asynchronous physical links \(page 104\)](#)). Since the slowest link is used as the reference, no stuffing is required on that link. Stuff events are inserted on the other links as required to keep them synchronized with the slowest link. For signalling purposes, Multiservice Switch nodes select one of the active links as the transmit reference link.

Interoperability considerations using ITC mode

While Multiservice Switch node-to-Multiservice Switch node interoperability is guaranteed in ITC mode, there may be some issues for interoperability with non-Multiservice Switch equipment in this mode. Interoperability may not be possible if the receive IMA on the non-Multiservice Switch equipment requires stuff events on the transmit reference link after every 2 048 cells for proper operation.

The Multiservice Switch IMA receiver is capable of operation with an IMA transmitter that uses either the Multiservice Switch ITC implementation or an ITC mode implementation compliant with the ATM Forum specification.



Guidelines for transmit clock mode

The following guidelines apply to the transmit clock mode used in Nortel Multiservice Switch systems:

- If all links in the IMA link group use the same transmit clock, use CTC mode. This guarantees interoperability with equipment compliant to the ATM Forum *Inverse Multiplexing for ATM (IMA) Specification*.
- If links in the IMA link group use different transmit clocks, then you must use ITC mode. Interoperability with non-Multiservice Switch equipment must be determined on a case-by-case basis.
- The transmit clock mode does not need to be the same at each end of the link.

Compensating for differential delay

Physical links within an IMA link group may encounter different cell transfer delays that can also vary over time on each individual link. Cells transmitted over different links in a given order may not be received in the same order at the far end due to differential delay. In fact, a cell transmitted before other cells in the original stream may arrive at the receiving end after those cells it had originally preceeded.

Attention: This is not the same issue as variations in transmit clock tolerance discussed in [Compensating for asynchronous physical links \(page 104\)](#).

Differential delay is a factor of the length of time that cells may spend on different links due to the length of the transmission path, the use of transmission media (such as satellite technology) or delays introduced by intermediate equipment. “Lagging” physical links (ones with a longer cell transit time) store more cells on a link than the “leading” links (those with the shortest cell transit time).

Using cell buffers to maintain link delay synchronization

The IMA cell machine in the FP at the receiving end of an IMA link group must be able to re-establish the cell order of the original stream. To do so, this device

- 1 measures differential delay over the various links
- 2 buffers cells received on each link based on the measured differential delay, thereby equalizing the differential delay before recombining the cells into the original stream

Buffers impose an equal transit time on all links. The “leading” link in a link group (the link with the shortest delay) has the longest cell buffer, and the most “lagging” link (the one with the longest delay) has the shortest buffer. When



the receiving end of an IMA link group has measured and compensated for the differential delay over a physical link, then the link is considered to be in link delay synchronization (LDS).

Measuring differential delay during IMA link group startup

In the process of establishing communication with the FP at the far end of a link during IMA link group startup or link addition and reactivation (see [Internal procedures for IMA link configuration \(page 102\)](#)), the IMA feature measures the differential delay over each physical link at the receive end. There can be one of two results:

- If the delay over a link relative to other links is *within* a specified maximum value, then the link is considered to be in LDS and can be included as an active member of the IMA link group.
- If the delay over a link relative to other links *exceeds* the maximum value, then the link is not in LDS and is rejected as an active member of the IMA link group.

When both ends of an IMA link group agree on which links are within LDS, they can start exchanging user cells.

Ongoing monitoring of differential delay


The IMA feature continually monitors and compensates for the differential delay of links within a link group. If the delay on a link changes such that it exceeds the specified maximum differential delay plus one millisecond, the link is considered to have lost its delay synchronization; that is, the link has experienced a loss of delay synchronization (LODS), and is deactivated from the IMA link group. A link is removed from an IMA link group immediately when a LODS state is detected.

For example, in the figure [Measuring differential delay over links in an IMA link group \(page 111\)](#), cell 4 is experiencing a delay of 200 milliseconds over link 3. If the differential delay is set to 100 milliseconds (the maximum), then links 0, 1, 2 and 4 can remain in the link group, while link 3 must be removed.

Attention: The ATM hardware is designed to tolerate a differential delay of 1 millisecond greater than the maximum provisioned for the attribute *maxDiffDelay*. For example, you may see a delay of 26 milliseconds when the provisioned maximum is 25 milliseconds.



Measuring differential delay over links in an IMA link group

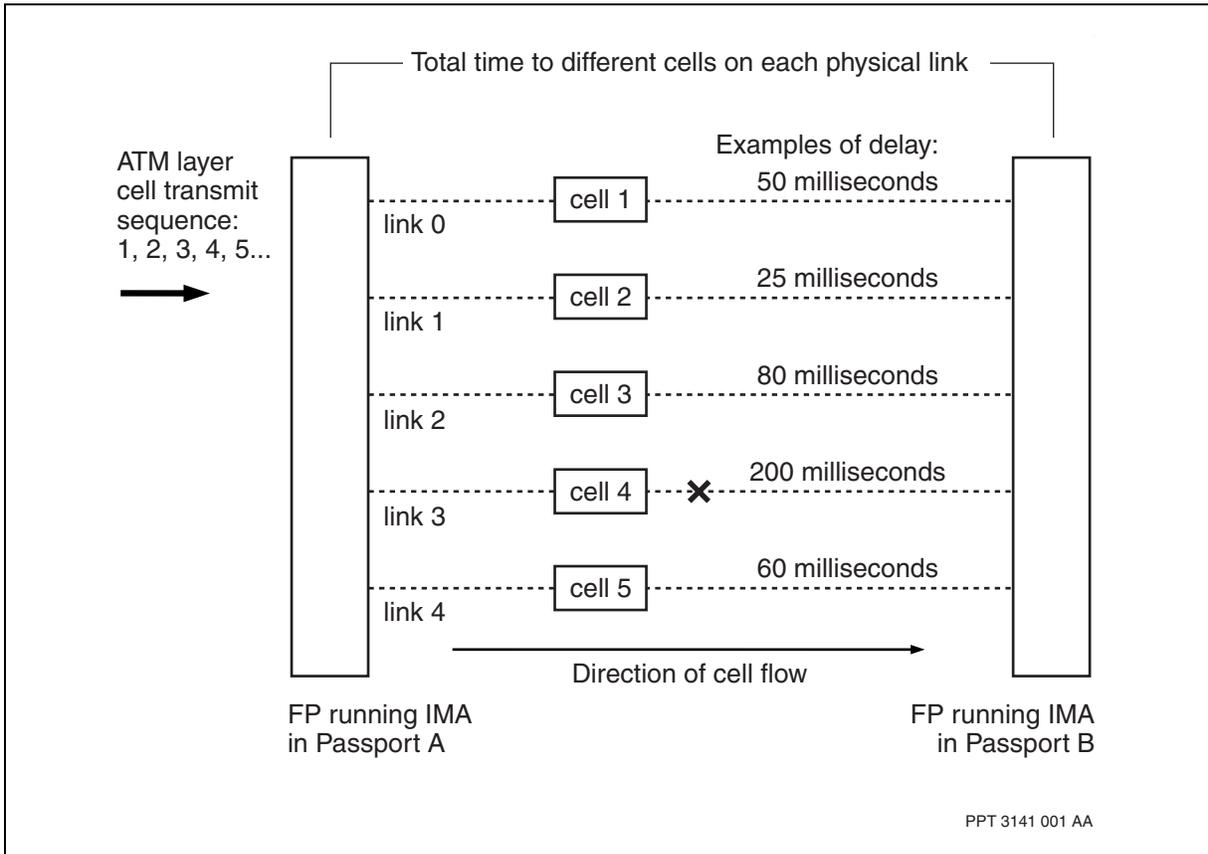

Link selection criteria

When not all of the links in an IMA link group conform to the maximum differential delay, you can choose one of the following criteria for selecting which links should be deactivated and which ones should remain active:

- maximum bandwidth
- minimum delay


Attention: The 32-port DS1/E1 Multiservice Access (MSA32) FP and 8-port DS1/E1 Multiservice Access (MSA8) FP only supports link selection based on minimum delay. For this FP only, the link selection criterion minimum delay is the value of the *Ima* attribute *linkSelectionDelay leastDelay*.



The default is maximum bandwidth. The figure [Example of an IMA link group illustrating different link selection criteria \(page 112\)](#) provides an example illustrating the two selection criteria. If you configure a maximum differential delay of 20 milliseconds for the IMA link group, then two different sets of links would be activated depending on the link selection criteria:

- If you have chosen to minimize delay, then links 1 and 3 would be selected.
- If you have chosen to maximize bandwidth links 0, 1 and 2 would be selected.

Example of an IMA link group illustrating different link selection criteria

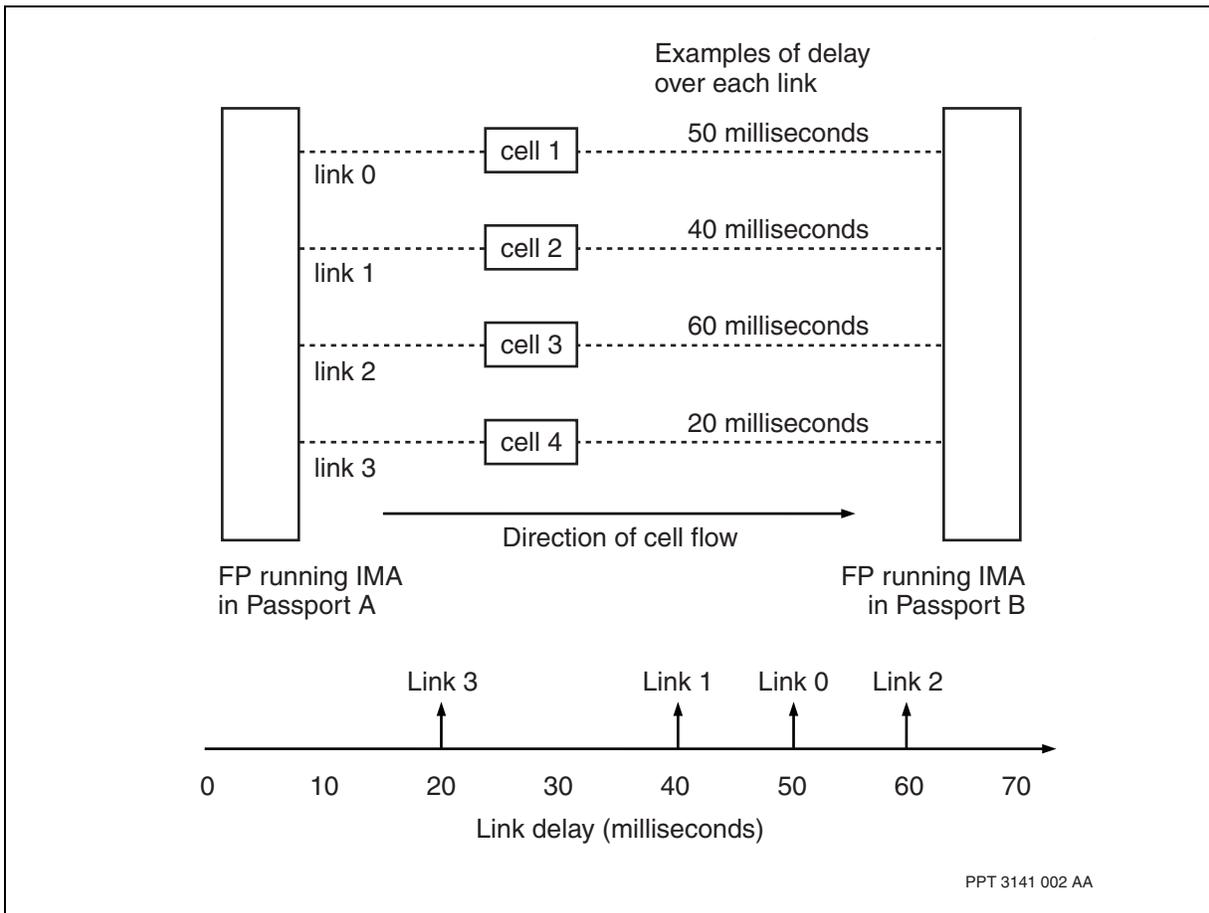

ATM IMA service reliability on Multiservice Switch for Succession Networks

This feature is not generally available. Contact Nortel Networks for more information on this feature.



In Nortel Multiservice Switch for Succession Networks, the IMA ATM feature (imaAtmForumHot) offers hitless equipment protection and software migration for ATM services running over IMA in one-for-one equipment protected scenarios on the 4-port DS3 Ch Atm FP.

The following ATM services offer a hitless service:

- PVCs (VCCs and VPCs)
- point-to-point SVCs
- source and destination SPVCs
- point-to-point SVPs
- source and destination SPVPs
- nailed-up relay points
- switched relay points

The ATM hitless services can be offered on up to:

- 56 ATM interfaces per FP (UNI and PNNI) in non-associated signalling configurations
- 5500 ATM connections per FP
 - 2600 SVCs for voice calls
 - 2600 PVCs/SPVCs/SVCs for DSL or voice calls
 - 300 PVCs/SPVCs/SVCs for internal control purposes
- 28 DS1s per IMA group
- 56 IMA groups per FP

Hot standby applications and features can run uninterrupted, even when the hardware providing that service changes. This means they can offer hitless services during equipment protection switchover and hitless software migration. This is done by operating with a standby instance of the software that is fully synchronized with the active instance of the software. Hot standby applications and features use equipment sparing of FPs to incur a minimal interruption of cell forwarding and maintain any connections that are established. This ability reduces service down time and increases service reliability.

The IMA ATM feature (imaAtmForumHot) provides hot standby functionality only when it is provisioned on a one-for-one (1:1) spared 4pDS3ChAtm LP and using a 1:1 sparing panel.



For information on:

- hitless ATM services on Nortel Multiservice Switch 15000 Multiservice Switch 20000 and nodes, see NN10600-702 *Nortel Multiservice Switch 7400/15000/20000 ATM Routing and Signalling Fundamentals*
- hitless software migration on Multiservice Switch 15000 and Multiservice Switch 20000 nodes, see NN10600-272 *Nortel Multiservice Switch 7400/15000/20000 Upgrading Software*
- hitless services and hot, warm, and cold standby applications and features, see NN10600-550 *Nortel Multiservice Switch 7400/15000/20000 Common Configuration Procedures*.

Attention: Succession Networks customers must use the templates in 241-6001-011 *Nortel Multiservice Data Manager Fault Management Tools* to configure IMA.

ATM IMA service operation after line switchovers on Multiservice Switch

On the 2-port STM1Ch FP, when a physical port is locked to force a switchover or if a fiber cut occurs, then the ICP cell gets sent at an offset in the IMA frame, which does not match the expected ICP offset at the receiving end. As per the IMA standard ATM Forum AF-PHY-0086.001, Inverse Multiplexing for ATM (IMA) Specification, Version 1.1, the IMA state-machine moves to the HUNT state to perform a cell-by-cell check for an ICP cell. Once it retrieves an ICP cell, it will move to the PRESYNC state and then has to receive one more good ICP cells (gamma) to move to the SYNC state. All this time, ATM layer have to be discarded as per the standard.

Attention: There can be a loss of between 2-3 IMA frames, which translates to about 60ms-100ms recovery time due to a lock port or a fiber cut event.

ATM control channel failure on IMA

ATM control channels, which include signaling, ILMI, and RCC are subject to the CBC algorithm on IMA links. If a link in the IMA group fails, a bandwidth reduction occurs and one or more of the control channels may be torn down if there is insufficient bandwidth available. The control channels will not reestablish until the link recovers or other connections are released, freeing bandwidth and allowing the control channels to be admitted.

IMA configuration considerations

The following sections contains considerations that apply to configuring IMA:

- [IMA and the ATM interface \(page 115\)](#)



- [IMA components and configurable attributes for configuring links \(page 115\)](#)
- [Notes about configuring IMA \(page 118\)](#)
- [Mixed configurations \(page 119\)](#)
- [Migrating software releases \(page 123\)](#)

IMA and the ATM interface

To transmit user cells, the Nortel Multiservice Switch node must have access to an ATM interface to link to an IMA link group. The table [Where to find information on ATM connection types that can be transported over an IMA link group on Multiservice Switch nodes \(page 115\)](#) lists the ATM features and services and shows where you can find information in the Multiservice Switch documentation suite.

Where to find information on ATM connection types that can be transported over an IMA link group on Multiservice Switch nodes

| Feature/service | Document |
|---------------------------------------|--|
| ATM bearer service | NN10600-700 <i>Nortel Multiservice Switch 7400/15000/20000 ATM Technology Fundamentals</i> |
| ATM direct and logical trunks (AAL5) | NN10600-420 <i>Nortel Multiservice Switch 7400/15000/20000 Operations: Trunking</i> |
| Circuit Emulation (AAL1) | NN10600-720 <i>Nortel Multiservice Switch 7400/15000/20000 Operations: AAL1 Circuit Emulation</i> |
| ATM multiprotocol encapsulation (MPE) | NN10600-800 <i>Nortel Multiservice Switch 7400/15000/20000 IP Technology Fundamentals</i> |
| Frame relay over ATM | NN10600-920 <i>Nortel Multiservice Switch 7400/15000/20000 Operations: Frame Relay to ATM Interworking</i> |

IMA components and configurable attributes for configuring links

There are three groups of components (or subcomponents) that are important to the IMA configuring process for Nortel Multiservice Switch nodes using any of the function processors supporting the IMA application:

- IMA
- ATM port management
- ATM interface



The ATM port management and IMA subcomponents both exist under the *Lp* component. The logical processor used for IMA is linked to the *Card* subcomponent under the *Shelf* component; this specifies the location in the shelf where the function processor running IMA resides.

Through configuration, associate each IMA *Link* subcomponent with the *Channel* subcomponent of a unique instance of a E1 or DS1 link on the FP. Channel 0 (the default value) is recommended even though other values are allowed. Configure all timeslots for this channel.

The figure [Component hierarchy showing examples of configuring links required for IMA using the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 117\)](#) shows the component hierarchy for the *Ima* feature on the 8-port E1 ATM FP, including the required configuring links.

Multiservice Switch systems can support a total of

- eight physical links in one link group on the 8-port DS1/E1 ATM FPs
- eight physical links in one link group on the 8-port DS1/E1 MSA FPs
- 28 logical links in one link group on the 4-port DS3Ch ATM FPs
- 32 logical links in one link group on the 2-port STM-1e channelized and 2-port STM-1 optical channelized FPs

These links can have instance numbers within the range of 0 to 31. For example, an 8-port DS1/E1ATM FP with a full complement of eight links forming a link group may include links with any combination of identifiers, such as:

- links 0, 1, 2, 3, 4, 5, 6, 7 or
- links 0, 5, 14, 23, 24, 25, 27, 31


With the 32-port DS1/E1 ATM FPs, you can configure a maximum of eight physical links in an IMA link group, with the links having instance numbers between 0 and 15 inclusive. IMA link groups on the 32-port DS1/E1 ATM FPs must contain physical links associated with ports in the range 0 to 15 inclusive, or in the range 16 to 31 inclusive: all ports in an IMA link group must fall in one of these ranges.

With the 2-port STM-1e channelized and 2-port STM-1 optical channelized CES/ATM/IMA FPs, the link group values for port 0 should be less or equal to 56, and different than any independent ATMIF E1 number. The port 1 IMA group number (group number - 57) should be greater than 56 and less than or equal to 113, and different than an independent ATMIF E1 number.



If you want to transmit user cells over an IMA link, the IMA link group (represented by the *Ima/1* subcomponent in the figure [Component hierarchy showing examples of configuring links required for IMA using the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 117\)](#)) must be linked to an ATM interface (represented by the *AtmIf*). All connections associated with the ATM interface are transmitted over the IMA link group. Link instance numbers must be unique within one IMA link group, but do not have to be unique among different IMA groups.

Component hierarchy showing examples of configuring links required for IMA using the 8-port E1 ATM FP (Multiservice Switch 7400 node)

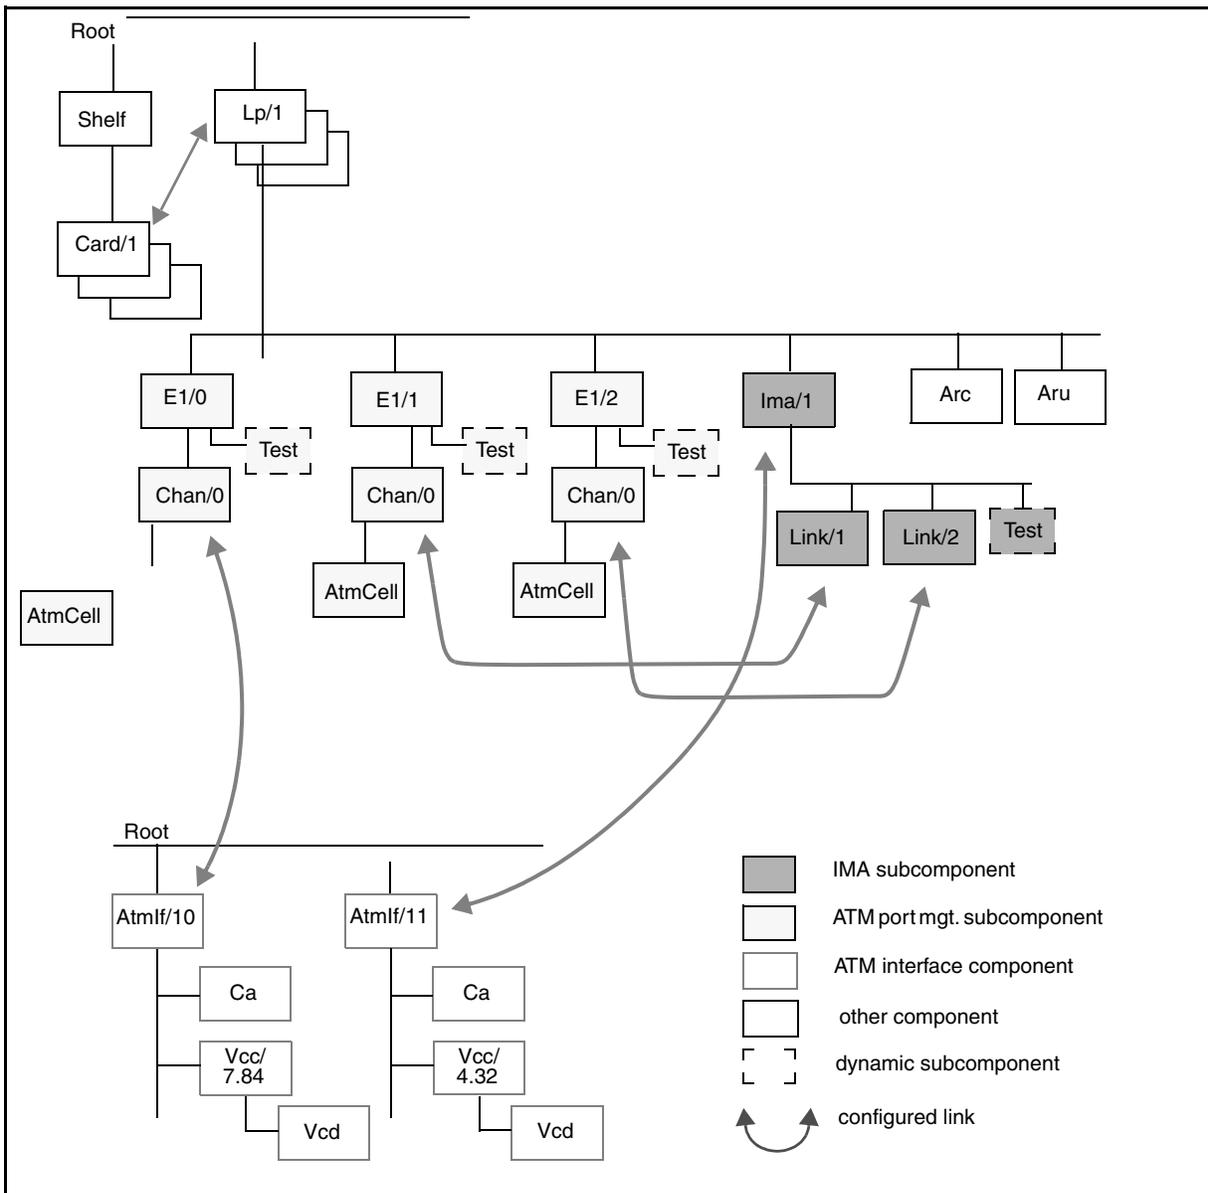



Notes about configuring IMA

For information on how to configure features on Nortel Multiservice Switch nodes, see NN10600-270 *Nortel Multiservice Switch 7400/15000/20000 Software Installation*:

For information on operator and configuration commands, see NN10600-050 *Nortel Multiservice Switch 7400/15000/20000 Command Reference*.

Before you begin configuring the *Ima* feature, note the following

- The *Ima* features may be used on an LP only if the associated *cardType* is
 - 8pDS1Atm (for Multiservice Switch 7400 nodes)
 - 8pE1Atm (for Multiservice Switch 7400 nodes)
 - 32pDS1Msa (for Multiservice Switch 7400 nodes)
 - 32pE1Msa (for Multiservice Switch 7400 nodes)
 - 4pDS3ChAtm (for Multiservice Switch 15000 and Multiservice Switch 20000 nodes)
 - 2pSTM1eCh (for Multiservice Switch 7400 nodes)
- An *Ima* component can be added only to an LP with a feature set containing:
 - *ImaAtmForum* (for the 32-port Ds1/E1 MSA FPs, 8-port Ds1/E1 MSA FPs, 4-port DS3Ch ATM FPs, 8-port DS1/E1 ATM FPs, the 2-port STM-1e channelized CES/ATM/IMA FPs, and the 2-port STM-1 optical channelized CES/ATM/IMA FPs)
- An *Ima* component must have at least one *Link* subcomponent.
- An *Ima* component must be bound to an *AtmIf* component or not bound to anything at all.
- All *Link* subcomponents of an *Ima* component must be bound to *Chan* components residing on the same LP as the *Ima* component.
- For the 4-port DS3Ch ATM FP, all *DS1* components must have the same *clockingSource* attribute value as their parent *DS3* component. With a value of *sameAsDs3*, the *DS1* component will automatically use the *clockingSource* value specified by the parent *DS3*. The attribute value is set by default to *sameAsDs3* and is the only value permitted.
- For the 4-port DS3Ch ATM FP, if the *NetworkSynchronization* component is present, both values of the *clockingSource* attributes for *DS3* and *DS1* components must be module.
- The 8-port DS1/E1 ATM FPs allow the traffic shaping feature to be enabled or disabled. The ATM cell queue manager provides the traffic shaping ability for the 4-port DS3Ch ATM FP on Multiservice



Switch 15000 and Multiservice Switch 20000 nodes. Similarly, traffic shaping on the 32-port MSA FP and the 8-port MSA FP is provided automatically by the ATM cell queue manager.

- For the 2-port STM-1 electrical CES/ATM/IMA FPs, only the ATM Forum IMA protocol 1.1 is supported. For more information see [IMA protocols \(page 89\)](#).

Attention: It is not a prerequisite to link the IMA application to an ATM interface before configuring IMA. You can configure IMA and test the IMA application before configuring a link to an ATM interface (see the procedure [Configuring the FP supporting the IMA feature \(page 12\)](#)). The section [IMA feature monitoring \(page 26\)](#) provides details on manually testing the IMA application.

Mixed configurations

Nortel Multiservice Switch FPs that provide IMA services, support a mixed configuration of independent ATM links and IMA link groups on the same FP. The following rules apply to configuring a mixed configuration:

- The instance number of IMA groups and independent links must be unique. For example an *Ima/0* and a *DS1/0* independent link cannot co-exist on the same FP.

From a configuring perspective, an independent link is a DS1 or E1 link that is bound by its *Channel* subcomponent to an *Atmlf* component. The instance number of an independent link is the same as its DS1 or E1 component. For information about configuring DS1 or E1 or DS3 port components, see NN10600-550 *Nortel Multiservice Switch 7400/15000/20000 Common Configuration Procedures*. For information about configuring an ATM interface, see NN10600-710 *Nortel Multiservice Switch 7400/15000/20000 ATM Configuration Management*.

- For the Multiservice Switch 7400 node using the 8-port DS1/E1 ATM FP, if traffic shaping and per-Vc queuing are disabled on the LP, then the instances of IMA groups and independent links can have values from 0 to 7. If either traffic shaping or per-Vc queuing is enabled on Multiservice Switch 7400 node using the 8-port DS1/E1 ATM FP, then the instances of IMA groups and independent links can have values from 0 to 3.

For the Multiservice Switch 7400 node using the 8-port DS1/E1 ATM FP, if traffic shaping and per-Vc queuing are disabled when there is no *Arc* subcomponent on the LP, or when the *Arc* subcomponent is present and



its *perVcQueueInterfaces* attribute is set to zero. If the *perVcQueueInterfaces* attribute is set a non-zero value, then per-Vc queuing and traffic shaping are enabled.

The value of the *Arc* component's *perVcQueueInterfaces* attribute also indicates which IMA groups or independent links can have per-Vc queuing and traffic shaping enabled:

- If the *perVcQueueInterfaces* is set to one, then only instance zero (that is *IMA/0* or *DS1/0*) can have per-VC queuing and traffic shaping enabled.
- If the *perVcQueueInterfaces* attribute is set to two, then instances zero and one can have per-Vc queuing and traffic shaping enabled.
- If the *perVcQueueInterfaces* attribute is set to four, then instances zero to three can have per-Vc queuing and traffic shaping enabled.
- The ATM cell queue manager automatically provides traffic shaping on the 32-port MSA FP.

For more information about configuring traffic shaping, see the following documents:

- NN10600-705 *Nortel Multiservice Switch 7400/15000/20000 ATM Traffic Management Fundamentals*
- NN10600-706 *Nortel Multiservice Switch 7400/15000/20000 ATM Traffic Shaping and Policing Fundamentals*
- NN10600-707 *Nortel Multiservice Switch 7400/15000/20000 ATM Queuing and Scheduling Fundamentals*


Example of a mixed configuration without traffic shaping

The figure [Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 121\)](#) shows the relationship between the FP's physical ports and ATM ports. The ATM ports are part of the FP's cell queue controller (CQC), the ATM cell processor; these are the ports used by the ATM software.

This figure shows four independent links and two IMA link groups. The IMA groups (*Ima/1* and *Ima/5*) each combine two physical ports into IMA virtual ports.



Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP (Multiservice Switch 7400 node)

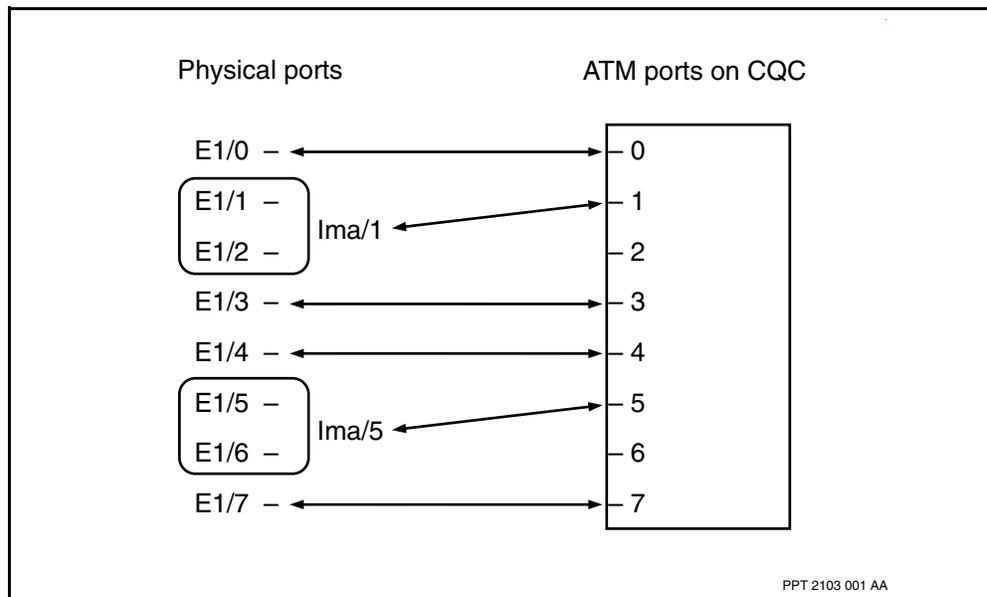

The example in the figure [Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 121\)](#) illustrates the following configuring concepts:

- When traffic shaping is not being used, all eight ATM ports are available.
- The instance numbers for each independent link match the ATM port number. Note that each physical port used as an independent link in the figure [Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 121\)](#) matches the same ATM port number:
 - E1/0
 - E1/3
 - E1/4
 - E1/7
- Independent links and IMA groups cannot share the same instance numbers. Note the instance numbers shown in the figure [Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 121\)](#):
 - E1/0
 - Ima/1 (composed of physical links E1/1 and E1/2)
 - E1/3
 - E1/4




- *Ima/5* (composed of physical links E1/5 and E1/6)
- E1/7
- The configuration of IMA groups incorporate a high degree of flexibility, Specifically, the IMA groups can use, without restriction, any physical links that are not being used as independent links. For example, in the figure [Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 121\)](#) the link groups *Ima/1* and *Ima/5* could use any combination of physical links available.

Example of a mixed configuration with traffic shaping

The figure [Example of a mixed configuration with traffic shaping enabled on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 122\)](#) shows a mixed configuration of three independent links and one IMA link group with traffic shaping enabled on the 8-port E1 ATM FP. In this example, the *perVcQueueInterfaces* attribute is set to two, making traffic shaping available on ATM ports 0 and 1. Also, the IMA link group *Ima/1* combines five physical ports into one virtual port.

Example of a mixed configuration with traffic shaping enabled on the 8-port E1 ATM FP (Multiservice Switch 7400 node)

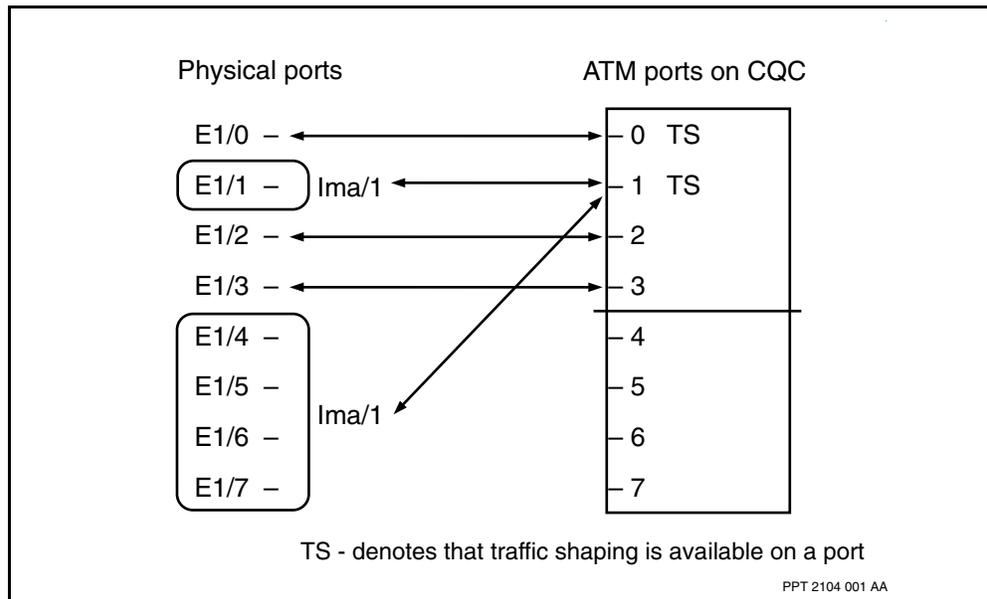

The example in the figure [Example of a mixed configuration with traffic shaping enabled on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 122\)](#) illustrates the following configuration concepts for Multiservice Switch 7400 nodes:

- When traffic shaping is enabled, only four ATM ports are available (ports 0 to 3).



- Because the *perVcQueueInterfaces* attribute is set to two, two of the four ATM ports (instances 0 and 1) can use the traffic shaping feature. In the example in the figure [Example of a mixed configuration with traffic shaping enabled on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 122\)](#), the independent link E1/0 and the IMA link group Ima/1 can take advantage of the traffic shaping feature.
- As in the example in the figure [Example of a mixed configuration without traffic shaping on the 8-port E1 ATM FP \(Multiservice Switch 7400 node\) \(page 121\)](#), the instance numbers for each independent link and IMA link group matches the ATM port number.
- Independent links and IMA groups have distinct instance numbers.

Migrating software releases

The proprietary IMA protocol is not supported due to the ATM Forum standards for IMA. Therefore, the ATM Forum IMA protocol must be used henceforth. See [Upgrading an existing IMA link group to the 8-port DS1/E1 ATM FPs \(page 23\)](#) for more information.



Multiservice Switch IMA compliance to specification

Use this chapter to learn about the exceptions to full specification compliance for inverse multiplexing for ATM (IMA) in Nortel Multiservice Switch systems. The specification for the IMA feature is the ATM Forum AF-PHY-0086.000, *Inverse Multiplexing for ATM (IMA) Specification, Version 1.0*

IMA in Multiservice Switch networks fully complies with all mandatory requirements of the ATM Forum IMA Specification with the exception of the specific sections listed in the table [Multiservice Switch IMA mandatory specification compliance \(page 125\)](#). None of the remaining exceptions have any impact regarding the interoperability of Multiservice Switch devices with other ATM Forum compliant equipment.

IMA on Multiservice Switch devices fully complies with the optional requirements for ITC mode of the ATM Forum Specification, with the exception of the specific sections listed in the table [Multiservice Switch IMA optional specification compliance \(page 126\)](#). These exceptions may affect the interoperability of Multiservice Switch devices in ITC mode with other ATM Forum-compliant equipment.

The following terminology applies to statements regarding compliance with specification:

- **Noted.** This terminology applies where the specification provides clarification, non-specific information, or details that do not relate directly to Multiservice Switch IMA.
- **Fully complies with.** This terminology applies where Multiservice Switch IMA functionality fully complies with the text for this section.
- **Compliant with these exceptions.** This terminology applies where Multiservice Switch IMA does not completely comply with the text. Additional text explains specific exceptions.
- **Not supported.** This terminology applies where Multiservice Switch IMA does not support the functionality described in the text.



Multiservice Switch IMA mandatory specification compliance

| Section | Applicable requirement | Compliance |
|--------------|--|---|
| Section R-54 | The IMA transmitter shall perform a check that an ATM Layer cell is available and accept that cell when the Tx IMA data cell clock (IDCC) ticks and only when the Tx IDCC ticks. | Compliant with these exceptions: Multiservice Switch does not implement the Tx IDCC clock exactly as specified. There is no impact regarding interoperability with specification-compliant equipment. |
| Section R-55 | The transmit IMA shall derive the Tx IMA data cell rate (IDCR) from the selected TRL according to (EQ. 1). | Compliant with these exceptions: Multiservice Switch does not implement the Tx IDCR exactly as specified. There is no impact regarding interoperability with specification-compliant equipment. |
| Section R-61 | The CDV attributed to the presence of ICP cells shall be removed by a behavior equivalent to providing a small smoothing buffer into which cells are placed after reordering and after removing ICP cells (including SICP cells), but not Filler cells. | Compliant with these exceptions: Multiservice Switch does not implement CDV smoothing at the IMA layer. There is no impact regarding interoperability with specification-compliant equipment. |
| Section R-62 | If the TRL is in the Working state, the Rx IDCR made available to the ATM layer of the receiver shall be derived as specified in equation (EQ. 1) using the incoming link indicated by the FE IMA transmitter as the TRL in the "Transmit Timing Information" field in the ICP cell. | Compliant with these exceptions: Multiservice Switch does not implement the Rx IDCR exactly as specified. There is no impact regarding interoperability with specification-compliant equipment. |
| Section R-63 | Zero or one cell only shall be made available to the ATM layer at an IMA data cell clock tick. The behavior of the IMA receiver shall be equivalent to following: when the IMA data cell clock at the receiver ticks, one cell shall be removed from the smoothing buffer. | Compliant with these exceptions: Multiservice Switch does not implement the Rx IDCC clock exactly as specified. There is no impact regarding interoperability with specification-compliant equipment. |
| Section R-97 | The default value of Alpha (a) shall be 2. | Compliant with these exceptions: Multiservice Switch implements Alpha = 1, which is within the optional range specified. There is no impact regarding interoperability with specification-compliant equipment. |

(1 of 2)



Multiservice Switch IMA mandatory specification compliance (continued)

| Section | Applicable requirement | Compliance |
|---|--|---|
| Section R-133 | In the case of the LODS failure alarm, the IMA shall support 2.5±0.5 seconds as a default persisting checking time to enter, and 10±0.5 seconds as a default persisting clearing time to exit. | Compliant with these exceptions: Multiservice Switch implements a hysteresis method to ensure that the LODS alarm does not toggle when the differential delay is near the maximum permitted level. There is no impact regarding interoperability with specification-compliant equipment. |
| IMA on Multiservice Switch devices fully complies with all mandatory requirements in the ATM Forum IMA Specification with the exception of the specific sections listed in this table. | | |
| For a definition of the terms and acronyms used in the “Applicable requirement” column of this table, see ATM Forum AF-PHY-0086.000, <i>Inverse Multiplexing for ATM (IMA) Specification</i> , Version 1.0. | | |
| (2 of 2) | | |

Multiservice Switch IMA optional specification compliance

| Section | Applicable requirement | Compliance |
|---|---|---|
| Section O-5 Section CR-4 Section CR-6 | The transmit IMA may also support the ITC mode. | Compliant with these exceptions: Multiservice Switch systems’s implementation of ITC mode is not exactly as specified. See Transmit clock mode (page 105) for details. |
| For a definition of the terms and acronyms used in the “Applicable requirement” column of this table, see ATM Forum AF-PHY-0086.000, <i>Inverse Multiplexing for ATM (IMA) Specification</i> , Version 1.0. | | |
| | | |

Nortel Multiservice Switch 7400/15000/20000

Operations: Inverse Multiplexing for ATM

Copyright © 2005 Nortel.
All Rights Reserved.

Publication: NN10600-730
Document status: Standard
Document issue: 7.1S1
Document date: October 2005
Product release: PCR7.1 and up
Job function: Operations
Type: NTP
Language type: U.S. English

NORTEL, the globemark design, and the NORTEL corporate logo are trademarks of Nortel.

