



Nortel Communication Server 1000

# ISDN Primary Rate Interface Maintenance

Document status: Standard  
Document version: 02.02  
Document date: 7 December 2007

Copyright © 2003-2007, Nortel Networks  
All Rights Reserved.

Sourced in Canada

#### LEGAL NOTICE

While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, the Nortel Logo, the Globemark, SL-1, Meridian 1, and Succession are trademarks of Nortel Networks.

All other trademarks are the property of their respective owners.

---

# Contents

---

<b>New in this release</b>	<b>7</b>
Other	7
Revision History	7
<hr/>	
<b>How to get help</b>	<b>9</b>
Getting help from the Nortel web site	9
Getting help over the telephone from a Nortel Solutions Center	9
Getting help from a specialist by using an Express Routing Code	9
Getting help through a Nortel distributor or reseller	10
<hr/>	
<b>Introduction</b>	<b>11</b>
Subject	11
Applicable systems	11
Intended audience	12
Conventions	12
Related information	12
<hr/>	
<b>PRI fault clearing</b>	<b>15</b>
Contents	15
PRI Red alarm (local alarm)	15
PRI Yellow alarm (remote alarm)	17
PRI problems	18
D-channel problems	20
<hr/>	
<b>Quick reference to PRI operations</b>	<b>21</b>
Contents	21
PRI commands (LD 60)	22
PRI messages	23
DCHI quick reference	23
D-channel commands (LD 96)	23
DCH messages	25
MSDL commands	25
Maintenance service messages	25
PRI status check	27
PRI startup	30
Network Call Trace	31

<b>Primary Rate Interface maintenance</b>	<b>39</b>
Contents	39
PRI commands (LD 60)	40
PRI alarm commands	42
PRI test commands	44
PRI tests	44
PRI error detection	48
TN-to-channel number conversion	53
Use the error counter	54
Replace the PRI	56
Pulsed E and M DTI2 signaling	57
<b>D-channel maintenance</b>	<b>59</b>
Contents	59
DCH commands (LD 96)	59
DCH tests	62
DCH traffic (LD 2)	66
MSDL local loopback test (NT6D80)	70
MSDL remote loopback tests (NT6D80)	71
Protocol log (PLOG)	73
Replace the DCHI	76
LD 60 - Loop Maintenance for SYS-12, AXE-10, SWE, SWISSNET, NUMERIS, EuroISDN, NEAX-61, Asia-Pacific	77
<b>Clock controller maintenance</b>	<b>79</b>
Contents	79
Clock operation	79
Clock controller commands (LD 60)	81
Replace the clock controller	82
Clock controller cabling	85
<b>ISDN Signaling Link maintenance</b>	<b>89</b>
Contents	89
ISL status formats	89
ISL startup	91
ISL recovery	91
<b>1.5 Mb DTI/PRI maintenance</b>	<b>93</b>
Contents	93
Overview	93
Monitor DTI/PRI operation	93
DTI/PRI maintenance tools	97
<b>1.5 Mb ISL maintenance</b>	<b>121</b>
Contents	121
Overview	121

---

 ISL maintenance tools 124
 

---

**2.0 Mb DTI maintenance 127**

Contents 127

Overview 127

Monitor system DTI operation 129

System DTI maintenance tools 135
 

---

**2.0 Mb PRI maintenance 143**

Contents 143

Overview 143

Enable the 2.0 Mb PRI after installation 143

Disable the 2.0 Mb PRI before removal 145

Monitor system PRI operation 146

System PRI maintenance tools 157
 

---

**2.0 Mb ISL maintenance 165**

Contents 165

Overview 165

ISL maintenance 174
 

---

**Procedures**

Procedure 1 Red alarm status check 17  
 Procedure 2 Checking Yellow alarm status 17  
 Procedure 3 PRI self-test 45  
 Procedure 4 PRI automatic loop test 45  
 Procedure 5 Remote loopback test 47  
 Procedure 6 Using the error counter 55  
 Procedure 7 Replacing the PRI circuit card 56  
 Procedure 8 Testing DCHI hardware 63  
 Procedure 9 Testing DCHI software 65  
 Procedure 10 Performing remote loopback tests 72  
 Procedure 11 Checking the PLOG status 74  
 Procedure 12 Replacing the DCHI 77  
 Procedure 13 Replacing the clock controller 83  
 Procedure 14 Self-testing the DTI/PRI card 103  
 Procedure 15 Coordinating the tests 104  
 Procedure 16 Replacing equipment 117  
 Procedure 17 Replacing the NTAK10 2.0 Mb DTI circuit card 127  
 Procedure 18 Performing Self-test/local loopback 136  
 Procedure 19 Enabling the NTAK79 PRI 143  
 Procedure 20 Enabling the NTBK50 PRI 144  
 Procedure 21 Disabling the NTAK79 PRI 145  
 Procedure 22 Disabling the NTBK50 PRI 145  
 Procedure 23 Self-testing the 2.0 Mb PRI 160  
 Procedure 24 Running the link diagnostic test 162  
 Procedure 25 Installing the NTAK02 168  
 Procedure 26 Setting up the D-channel 169



---

## New in this release

---

There have been no updates to the document in this release.

### Other

#### Revision History

- |                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>December 2007</b>  | Standard 02.02. This document has been up-issued to support Communication Server Release 5.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>June 2007</b>      | Standard 01.02. This document is up-issued to remove the Nortel Networks Confidential statement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>May 2007</b>       | Standard 01.01. This document is issued to support Communication Server 1000 Release 5.0. This document contains information previously contained in the following legacy document, now retired: ISDN Primary Rate Interface Maintenance (NN43001-717). No new content has been added for Communication Server 1000 Release 5.0. All references to Communication Server 1000 Release 4.5 are applicable to Communication Server 1000 Release 5.0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>August 2005</b>    | Standard 3.00. This document is up-issued to support Communication Server 1000 Release 4.5.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>September 2004</b> | Standard 2.00. This document is up-issued for Communication Server 1000 Release 4.0.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>October 2003</b>   | Standard 1.00 This document is a new technical document for Succession 3.0. It was created to support a restructuring of the Documentation Library, which resulted in the merging of multiple legacy technical documents. This new document consolidates information previously contained in the following legacy documents, now retired: <ul style="list-style-type: none"><li>• <i>ISDN PRI: Maintenance(553-2901-501)</i></li><li>• <i>1.5Mb DTI/PRI Description, Installation and Maintenance(553-3011-310)</i>. Content from <i>2.0Mb DTI/PRI Description, Installation and Maintenance (553-3011-310)</i> also appears in <i>ISDN Primary Rate Interface Installation and Commissioning (NN43001-301)</i>.</li><li>• <i>2.0Mb DTI/PRI Description, Installation and Maintenance(553-3011-315 2.0)</i>. Content from <i>2.0Mb DTI/PRI Description, Installation and Maintenance (553-3011-315 2.0)</i> also appears in <i>ISDN Primary Rate Interface Installation and Commissioning (NN43001-301)</i>.</li></ul> |

## 8 New in this release

---

---

## How to get help

---

This chapter explains how to get help for Nortel products and services.

### Getting help from the Nortel web site

The best way to get technical support for Nortel products is from the Nortel Technical Support web site:

<http://www.nortel.com/support>

This site provides quick access to software, documentation, bulletins, and tools to address issues with Nortel products. From this site, you can:

- download software, documentation, and product bulletins
- search the Technical Support Web site and the Nortel Knowledge Base for answers to technical issues
- sign up for automatic notification of new software and documentation for Nortel equipment
- open and manage technical support cases

### Getting help over the telephone from a Nortel Solutions Center

If you do not find the information you require on the Nortel Technical Support web site, and you have a Nortel support contract, you can also get help over the telephone from a Nortel Solutions Center.

In North America, call 1-800-4NORTEL (1-800-466-7835).

Outside North America, go to the following web site to obtain the telephone number for your region:

<http://www.nortel.com/callus>

### Getting help from a specialist by using an Express Routing Code

To access some Nortel Technical Solutions Centers, you can use an Express Routing Code (ERC) to quickly route your call to a specialist in your Nortel product or service. To locate the ERC for your product or service, go to:

<http://www.nortel.com/erc>

### **Getting help through a Nortel distributor or reseller**

If you purchased a service contract for your Nortel product from a distributor or authorized reseller, contact the technical support staff for that distributor or reseller.

---

# Introduction

---

This document is a global document. Contact your system supplier or your Nortel representative to verify that the hardware and software described are supported in your area.

## Subject

This document provides maintenance procedures for ISDN Primary Rate Interface (PRI) capability on Meridian 1 and CS 1000M systems.

### Note on legacy products and releases

This technical document contains information about systems, components, and features that are compatible with Nortel Communication Server 1000 Release 5.5 software. For more information on legacy products and releases, click the **Technical Documentation** link under **Support & Training** on the Nortel home page:

[www.nortel.com](http://www.nortel.com)

## Applicable systems

This document applies to the following systems:

- Communication Server 1000E (CS 1000E) CP PII, CP PIV and CP PM
- Communication Server 1000M Single Group (CS 1000M SG) CP PII, CP PIV
- Communication Server 1000M Multi Group (CS 1000M MG) CP PII, CP PIV
- Meridian 1 PBX 11C Chasis
- Meridian 1 PBX 11C Cabinet
- Meridian 1 PBX 61C CP PII, CP PIV
- Meridian 1 PBX 81C CP PII, CP PIV

**Note:** When upgrading software, memory upgrades may be required on the Signaling Server, the Call Server, or both.

## System migration

When particular Meridian 1 systems are upgraded to run CS 1000 software and configured to include a Signaling Server, they become CS 1000M systems. [Table 1 "Meridian 1 systems to CS 1000 systems" \(page 12\)](#) lists each Meridian 1 system that supports an upgrade path to a CS 1000M system.

**Table 1**  
**Meridian 1 systems to CS 1000 systems**

This Meridian 1 system...	Maps to this CS 1000 system
Meridian 1 PBX 11C Chassis	CS 1000E
Meridian 1 PBX 11C Cabinet	CS 1000E
Meridian 1 PBX 61C	CS 1000M Single Group
Meridian 1 PBX 81C	CS 1000M Multi Group

## Intended audience

This document is intended for individuals responsible for maintaining ISDN PRI capability on Meridian 1 and CS 1000M systems.

## Conventions

### Terminology

In this document, the following systems are referred to generically as "system":

- Communication Server 1000E (CS 1000E)
- Communication Server 1000M (CS 1000M)
- Meridian 1

The following systems are referred to generically as "Small System":

- Meridian 1 PBX 11C Chassis
- Meridian 1 PBX 11C Cabinet

The following systems are referred to generically as "Large System":

- Communication Server 1000M Single Group (CS 1000M SG)
- Communication Server 1000M Multi Group (CS 1000M MG)
- Meridian 1 PBX 61C CP PII, CP PIV
- Meridian 1 PBX 81C CP PII, CP PIV

## Related information

This section lists information sources that relate to this document.

## Technical Documentation

The following technical documents are referenced in this document:

- *Features and Services Fundamentals (NN43001-106)*
- *Software Input Output Administration (NN43001-611)*
- *Software Input Output Reference - Maintenance (NN43001-711)*

## Online

To access Nortel documentation online, click the **Technical Documentation** link under **Support & Training** on the Nortel home page:

[www.nortel.com](http://www.nortel.com)

## CD-ROM

To obtain Nortel documentation on CD-ROM, contact your Nortel customer representative.



---

# PRI fault clearing

---

## Contents

This section contains information on the following topics:

"PRI Red alarm (local alarm)" (page 15)

"PRI Yellow alarm (remote alarm)" (page 17)

"PRI problems" (page 18)

"D-channel problems" (page 20)

## PRI Red alarm (local alarm)

A PRI local alarm can indicate:

- 1.5 Mb/2.0 Mb digital transmission problems
- a PRI card fault

Under any of these alarm conditions, all 24/30 B-channels are taken out of service, and:

1. The PRI local alarm faceplate LED is lit.
2. Calls on the PRI are disconnected automatically.
3. All 24/30 B-channels are disabled.
4. After a pause of 2.5 seconds, the PRI sends a remote-alarm indication to the far-end switch.
5. The appropriate Digital Trunk Diagnostic (DTA) message is printed, and a minor alarm is raised on all attendant consoles within the same customer group.

System software checks every 0-15 minutes (programmable) to see if a clock-controller or reference-clock error has occurred.

If the 0-15 minute check finds the PRI in local alarm was a primary clock source, the software switches the clock controller to the secondary reference.


### Channel restoration

When the alarm condition improves, the PRI is restored to service as follows:

1. The local alarm is cleared.
2. After 11 seconds, the PRI stops sending a remote alarm indication to the far end.
3. The D-channel automatically attempts to re-establish. If this is successful, the B-channels are placed into the idle state and made available for calls.

Figure 1 "PRI alarm timers" (page 16) shows the progression of the system Red and Yellow (local and remote) alarm timers.

**Figure 1**  
PRI alarm timers

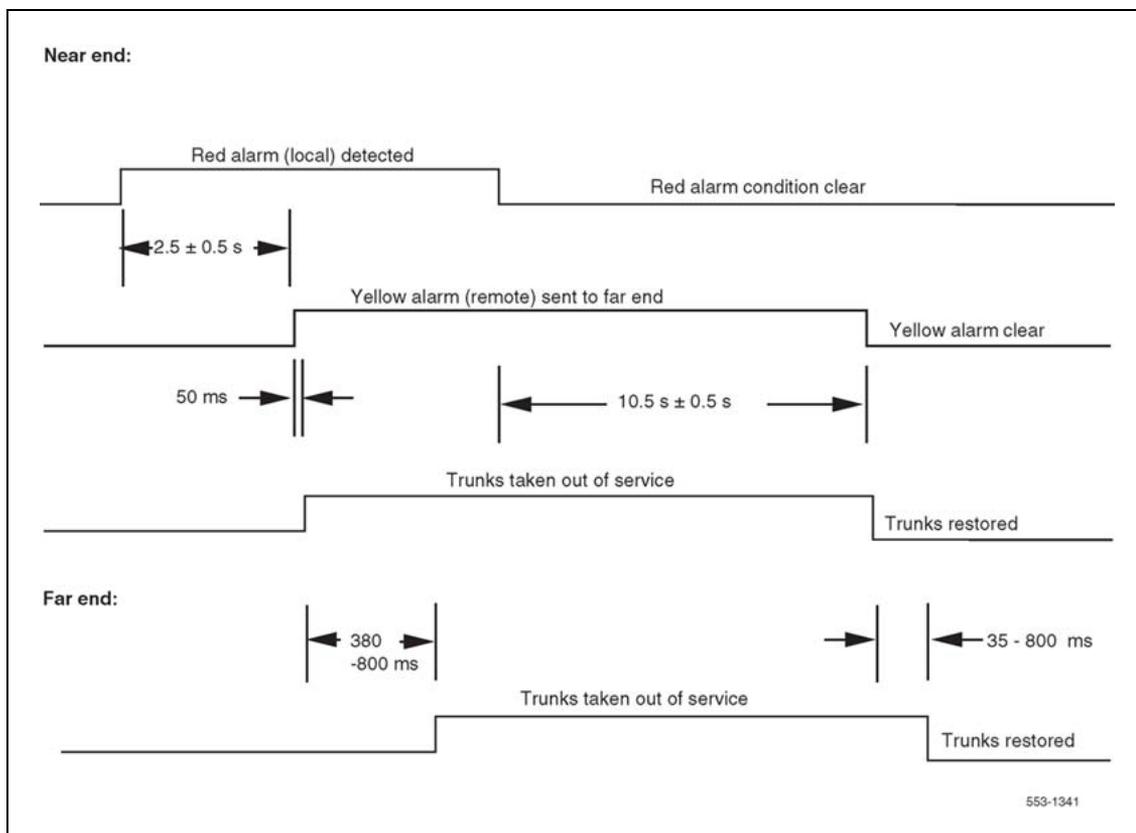

**Procedure 1****Red alarm status check**

<b>Step</b>	<b>Action</b>
1	Check PRI status using the following prompts: LD 60 STAT (loop)
2	Check PRI alarm counters using the following prompts: LD 60 LCNT (loop)
3	See <a href="#">Table 2 "PRI problem solving" (page 18)</a> for solutions to possible PRI problems.

---

—End—

**PRI Yellow alarm (remote alarm)**

A remote alarm on the system indicates the far end is out of service. The fact that the PRI is receiving the remote-alarm pattern indicates that there is transmission integrity, but the far end is not ready.

When the PRI receives the remote-alarm signal from the far end, all 24/30 B-channels are disabled.

**Channel restoration**

When the PRI stops receiving the remote alarm, the channels are placed into the idle state.

Each time a Yellow alarm is generated, a counter is incremented. When the Yellow alarm 24-hour threshold (prompt RALM in LD 73) is reached, the PRI must be restored to service manually.

**Procedure 2****Checking Yellow alarm status**

<b>Step</b>	<b>Action</b>
1	Perform a PRI status check.
2	Contact personnel at the far end to determine what action they are taking.  When the Yellow alarm (remote alarm) 24-hour threshold is reached (DTA006 is printed), do the following:

- 3 Contact personnel at the far end to determine what action they are taking.
- 4 When the far-end troubles are cleared, reset the alarm counters and disable, then enable, the PRI. To do this, use the following commands:

```
LD 60
LCNT loop          list alarm counters
RCNT loop          reset alarm counters
DISL loop          disable loop
ENLL loop          enable loop
```

---

—End—

---

## PRI problems

The PRI can have any of the following problems. Determine the cause of the problem and follow the recommended actions provided in [Table 2 "PRI problem solving" \(page 18\)](#).

**Table 2**  
**PRI problem solving**

Symptom	Action
<p><b>No connection to far end.</b></p> <p>(If the 1.5 Mb/2Mb transmission cable is not physically connected to the far end, frame-alignment errors occur. The channels will be disabled, but the PRI will be in local-alarm mode.)</p>	<p>Use the Error Counter to verify the 1.5 Mb/2.0 Mb digital transmission directly from the PRI faceplate (RCV and XMT) to each connection (cross-connect, repeater, and other such equipment).</p>
<p><b>PRI fails self-test.</b></p>	<p>Replace the PRI card.</p>
<p><b>Far-end problems</b>, usually indicated by a remote alarm.</p>	<p>Do a PRI status check and contact personnel at the far end for resolution.</p>

Symptom	Action
<p><b>PRI is connected but getting bit-rate or frame errors.</b> This can be caused by:</p> <ul style="list-style-type: none"> <li>• a bad 1.5 Mb/2Mb transmission cable connection</li> <li>• electrical or electromagnetic interference</li> <li>• carrier problems (for example, defective repeater)</li> </ul>	<p>Use the Error Counter to verify the 1.5 Mb/2Mb digital transmission from the PRI faceplate (RCV and XMT) to each connection (cross-connect, repeater, and other such equipment).</p>
<p><b>Configuration settings do not match the far end.</b></p> <p>These problems can occur during initial startup. They may be indicated by:</p> <ul style="list-style-type: none"> <li>• DTA 018 Frame-slip out-of-service limit</li> <li>• DTA 021 Loss-of-frame-alignment for 3 seconds</li> <li>• DCH 1003 D-channel MDL errors</li> </ul>	<p>See that the PRI parameters correlate to the far-end parameters.</p>
<p><b>Cannot enable the PRI.</b> Two reasons follow: The far-end PRI is disabled, indicated by:</p> <ul style="list-style-type: none"> <li>• PRI 000PRI is responding</li> <li>• DTA 005 remote alarm occurred</li> <li>• DCH 1010 DCHI is software disabled</li> </ul> <p>Or, there is no 1.5 Mb/2Mb connection, indicated by:</p> <ul style="list-style-type: none"> <li>• PRI 000 PRI is responding</li> <li>• DTA 021 loss of frame alignment for 3 seconds</li> <li>• DCH 1010 DCHI is software disabled</li> </ul>	<p>Contact personnel at the far-end site to resolve the problem.</p> <p>See above, under <b>No connection to far end.</b></p>
<p><b>The system initializes and there are no active B-channels.</b></p>	<p>When a PRI or ISL trunk interfaces with another system and the system initializes, you may have to disable and then re-enable each B-channel.</p>

## D-channel problems

D-channel problems are indicated when the D-channel Handler Interface (DCHI) releases after being enabled. This applies to both primary and backup D-channels. For example:

Command	Response	Description
LD 96 ENL DCH N	DCH 1003 DCH 1006 DCH RLS	MDL error link establishment error DCHI released

If these messages appear, follow the steps in "[Procedure 3D-channel status check](#)" (page 20).

### Procedure 3 D-channel status check

Step	Action	Response
1	Check the status of the D-channel's PRI.	If the far-end D-channel is down, the DCH1006 message is printed.
2	Clear any PRI problems.	
3	Contact the far end.	
4	Test the DCHI using tests 100, 101, 200 and 201 (the tests must be run in sequential order).	
5	Print the protocol log using:  LD 96  PLOG DCH N	
6	Check the DCHI-to-PRI cable.	
7	Check DCHI card jumper settings.	
8	Check to see that one system is designated as "master" (usually the larger system), and the other as "slave."	

---

# Quick reference to PRI operations

---

## Contents

This section contains information on the following topics:

- "PRI commands (LD 60)" (page 22)
- "PRI messages" (page 23)
- "DCHI quick reference" (page 23)
- "D-channel commands (LD 96)" (page 23)
- "DCH messages" (page 25)
- "MSDL commands" (page 25)
- "Maintenance service messages" (page 25)
  - "Service message function" (page 26)
  - "Service message commands" (page 27)
- "PRI status check" (page 27)
- "PRI startup" (page 30)
- "Network Call Trace" (page 31)
  - "Enhanced Trace command output" (page 32)
  - "Configure Network Call Trace" (page 32)
  - "Trace a call" (page 32)
  - "Trace function 01" (page 32)
  - "Example 1: Successful call with trace function 01" (page 34)
  - "Example 2: Unsuccessful call with trace function 01" (page 35)
  - "Trace function 02" (page 35)
  - "Feature requirements" (page 36)

This chapter provides a quick-reference source for PRI maintenance operations.

## PRI commands (LD 60)

Table 3 "PRI commands (quick reference)" (page 22) is a quick reference list of important PRI commands. For a more extensive list of PRI commands, see the section describing PRI maintenance.

**Table 3**  
**PRI commands (quick reference)**

Command	Action
ATLP (0), 1	Disable (default) or enable midnight auto loop test.
CDSP	Clear maintenance display to 00 or blank.
CMIN ALL	Clear minor alarm indication on all attendant consoles.
CMIN c	Clear minor alarm indication on attendant consoles for customer c.
DISI loop	Disable loop when all channels are idle.
DISL loop	Disable network and DTI/PRI cards of loop.
DLBK loop	Disable remote loop back test per RLBK command.
DLBK I ch	Disable remote loop back test per RLBK I ch command.
DSCH I ch	Disable channel ch of loop.
ENCH loop	Enable all channels on DTI/PRI.
ENCH I ch	Enable channel ch of DTI/PRI loop.
ENLL loop	Enable network and DTI/PRI cards of loop.
LCNT (loop)	List contents of alarm counters on one or all DTI/PRI loops.
LOVF c r	List threshold overflows for customer c (0-99) and route r (0-511).
RCNT	Reset alarm counters of all DTI/PRI loops.
RCNT loop	Reset alarm counter of DTI/PRI loop.
RMST loop	Perform self-test on loop.
RMST I ch	Perform self-test on specified channel (2.0 Mb/s DTI/PRI only).
RLBK loop	Close loop at carrier interface point for testing.
RLBK I ch	Close channel ch at carrier interface point.
RSET I ch	Reset thresholds for channel ch.
SLFT loop	Invoke hardware self-test on loop.
SLFT I ch	Invoke partial hardware self-test on channel ch.
STAT	Get status of all loops.
STAT loop	Get status of DTI/PRI loop.
STAT I ch	Get status of channel ch.

## PRI messages

Refer to *Software Input Output Reference - System Messages (NN43001-712)* for commonly encountered PRI messages.

## DCHI quick reference

The D-channel Interface (DCHI) card provides an asynchronous port and the DCHI port. The D-channel performs the call setup and call modification signaling for one or more 30-channel PRI cards. (Switch settings for the DCHI port are shown in the DCHI replacement section.)

## D-channel commands (LD 96)

Table 4 "DCHI and D-channel commands (quick reference)" (page 23) is a partial list of DCHI and D-channel commands. For a complete list of DCHI and D-channel commands, see the *Software Input Output Reference - Maintenance (NN43001-711)*.

**Table 4**  
**DCHI and D-channel commands (quick reference)**

Command	Action
DIS AUTO x	Disable automatic recovery for DCH x.
DIS DCH x	Disable DCH x.
DIS MSGI x (options)	Disable the monitoring of incoming messages on D-channel x.
DIS MSGI x FEAT CPNW	Disable incoming monitoring for the Network CPNW ISDN messages on D Channel x.
DIS MSGO x (options)	Disable the monitoring of outgoing messages on D-channel x.
DIS MSGO x FEAT CPNW	Disable outgoing monitoring for the Network CPNW ISDN messages on D Channel x.
DIS SERV x	Disable service messages on D-channel x.
DLIF DCH x	Force download of D channel x (For PRI UIPE application).
ENL AUTO x	Enable automatic recovery for DCH x.
ENL DCH x (FDL)	Enable DCH x and attempt to establish the link, and force download to MSDL.
ENL MSGI x (options)	Enable the monitoring of incoming messages on D-channel x.
ENL MSGI x FEAT CPNW	Enable incoming monitoring for the Network CPNW ISDN messages on D Channel x.
ENL MSGO x (options)	Enable the monitoring of outgoing messages on D-channel x.

Command	Action
ENL MSGO x FEAT CPNW	Enable outgoing monitoring for the Network CPNW ISDN messages on D Channel x.
ENL SERV x	Enable service messages on D-channel x.
EST DCH x	Establish multiple frame operation on D-channel x.
EST ISPC I ch (N)	Start the data interface establishment process at the ISPC slave side an ISPC link (where "N" = the "number of tries" counter).
FDIS NCAL <DCH#> <conn_ID>	Force-disconnect the specified call-independent connection.
PLOG DCH x	Print protocol error log on DCH x.
RLS DCH x	Release D-channel x.
RLS ISPC I ch	Stop the data interface establishment process.
RST DCH x	Reset D-channel x, inhibit signaling.
RST MON	Reset or reactivate monitoring on D-channels with enabled monitors.
SDCH DCH x	Switch to the standby D-channel x.
SET MSGI x MON (0)-2	Set monitor output format level for incoming messages on D-channel x.
SET MSGO x MON (0)-2	Set monitor output format level for outgoing messages on D-channel x.
STAT DCH (x)	Get status of one or all D-channels.
STAT ISPC I ch	Get status of data interface establishment process at ISPC slave side ISPC link which has been configured to convey D-channel signaling.
STAT NCAL <DCH#>	List all current call-independent connections on a given PRI D-channel.
STAT NCAL <DCH#> <conn_ID>	List information pertaining to a specific call-independent connection.
STAT MON (x)	Display the incoming and outgoing monitoring status of one or all D-channels.
STAT SERV (x)	Get the enable/disable status of services messages for one or all D-channels.
TEST 100 x	Perform interrupt generation test on DCH x.
TEST 101 x	Perform loop back mode test on DCH x.
TEST 200 x	Perform interrupt handler test on DCH x.
TEST 201 x	Test interrupt handler-to-link interface path.

## DCH messages

Refer to *Software Input Output Reference - System Messages (NN43001-712)* for commonly encountered D-channel (DCH) messages.

## MSDL commands

Table 5 "MSDL D-channel commands" (page 25) is a partial list of Multi-purpose Serial Data Link (MSDL) D-channel commands. For a complete list of D-channel commands, see the *Software Input Output Reference - Maintenance (NN43001-711)*.

**Table 5**  
**MSDL D-channel commands**

Command	Action
DIS LLB x	Disable local loopback mode on MSDL DCH x.
DIS RLB x	Disable remote loopback mode on MSDL DCH x.
DIS TEST x	Disable TEST mode on MSDL DCH x.
ENL LLB x	Enable local loopback mode on MSDL DCH x.
ENL RLB x	Enable remote loopback mode on MSDL DCH x
ENL TEST x	Enable TEST mode on MSDL DCH x
PCON DCH x	Print configuration parameters on MSDL DCH x
PTRF DCH x	Print traffic report on MSDL DCH x
TEST LLB x	Start local loopback test on MSDL DCH x
TEST RLB x	Start remote loopback test on MSDL DCH x
ENBL MSDL x	Enable MSDL device number x

## Maintenance service messages

Service messages provide near-end and far-end switch status. Both service and service acknowledge messages are supported on PRI B-channels and ISDN Signaling Link (ISL) channels. In addition, service and service acknowledge messages for D-channels are supported between systems only. These messages are used for backup D-channel and D-channel sanity polling. The status may be in-service and out-of-service.

Service and service acknowledge messages for B-channels and ISL channels are supported between systems.

Service and service acknowledge messages for B-channels and PRI are supported only between systems, and between systems and supported Central Office connectivities. The following are the three channel statuses reported by the service and service acknowledge messages for B-channels and ISL channels:

- in-service

- maintenance
- out-of-service

Near-end and far-end subcategories are defined for each maintenance status. See [Table 6 "Maintenance message status" \(page 26\)](#) for possible combinations of near and far-end status and the channel capability for each status. When the near-end status and far-end status do not match, the more severe maintenance status takes effect over the less severe maintenance status.

**Table 6**  
**Maintenance message status**

Near-end status	Far-end status	B or ISL channel capability for near-end
In-service	In-service	both incoming and outgoing calls allowed
In-service	Maintenance	only incoming calls allowed
In-service	Out-of-service	not allowed to use
Maintenance	n/a	not allowed to use
Out-of-service	n/a	not allowed to use

### Service message function

Service messages are used to monitor the following:

- D-channel establishment
- D-channel sanity polling
- B-channel or ISL channel status change
- Channel status audit

### D-channel establishment

When the D-channel establishes, the B-channel status is supported by sending service messages for each B-channel controlled by a D-channel. This allows the far end to synchronize its channel states. These service messages are sent when the D-channel is brought up automatically by the system or manually by using LD 96.

This function is supported by network connections only.

### D-channel sanity polling

If a D-channel has been idle for 30 seconds, a service message is sent to poll the sanity of the link. The service message is sent regardless of whether the near end is configured as a master or a slave.

### **B-channel or ISL channel status change**

Whenever there is a status change for a B-channel or an ISL channel, the new status is reported to the far end by means of a service message. Status change can occur through service change or maintenance operations, such as the addition or deletion of a channel in LD 14 or the enabling or disabling of the associated loop, shelf, card or unit in LD 30, LD 32, LD 36, LD 41, or LD 60.

### **Channel status audit**

LD 30 is enhanced to allow channel status audit to be initiated. The channels associated with each D-channel are examined and their status is reported to the far end by means of service messages.

### **Service message commands**

Activate the service messages in LD 96 on a per-D-channel basis. The commands are as follows:

- ENL SERV x: Turns on the support of service and service acknowledge messages for D-channel x. The primary and backup D-channels must be disabled before enabling service messages.
- DIS SERV x: Turns off the support of service and service acknowledge messages for D-channel x.
- STAT SERV (x): Displays the current service and service acknowledge message SERV setting for individual DCH n or for all D-channels.

**Note:** The ENL SERV and DIS SERV commands apply to both the primary and backup D-channel. With backup D-channel configured, for example LD 17 DCHI = 5 and LD 17 BCHI = 7, ENL SERV 5 enables both D-channels 5 and 7. Similarly, DIS SERV 5 disables both channels.


The FE MBSY, FE DSBL, and IDLE messages appear when either the B-channel or the ISL channel is idle. See "[PRI fault clearing](#)" (page 15) for more information about these responses.

## **PRI status check**

This status check is used to verify that a PRI is working normally. It assumes the PRI and DCHI are properly installed (for example, correctly cabled) and operational. If the PRI status is not as shown in the steps below, complete the check and proceed to PRI fault clearing procedures.

Once all problems are cleared, go to "[PRI startup](#)" (page 30).

**Procedure 4**  
**PRI status check**

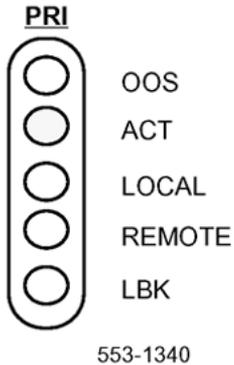Step	Action	Response
1	Check the status LEDs on all PRI cards.	For normal operation, only the green ACT LED is lit.  
2	Note whether any other LED is lit and continue with the status check.	
3	Check the LED on the DCHI faceplate.	If the LED is lit, the D-channel is disabled.  <b>Note:</b> The DCHI LED indicates the status of both ports on the DCHI card. If both ports are configured, the LED is lit only when both ports are disabled.
4	Check the status of the DCHI port using:  LD 96  STAT DCH x	
5	Check the status of all PRIs using:  LD 60  STAT	Sample response:  STAT (L) PRI LOOP L - ENBL  REF CLK - DSBL  SERVICE RESTORE - YES  ALARM STATUS: ACCEPTABLE  CH 01 - IDLE TIE *      CH 02 - IDLE TIE *

Step	Action	Response
		CH 03 - IDLE TIE *      CH 04 - IDLE TIE *  .  .  CH 31 - D-channel *
<p><b>6</b></p>	<p>List PRI alarm counters using: LD 60</p> <p>LCNT (L)</p> <p>(Check the out-of-service counters to determine the number of out-of-service occurrences since the last execution of the midnight routines.)</p>	<p>PRI LOOP L</p> <p>MNT NNDC NNC OOS</p> <p>BVP-   xxx  xxx  xxx  xxx                      FAP-   xxx  xxx  xxx  xxx                      SLP-   xxx  xxx  xxx  xxx                      CRC-   xxx  xxx  xxx  xxx                      G2   xxx  xxx  xxx  xxx                      TOTAL 24 HOUR BPV- xxxxxxxxx                      TOTAL 24 HOUR FAP- xxxxxxxxx                      TOTAL 24 HOUR SLP- xxxxxxxxx                      TOTAL 24 HOUR CRC- xxxxxxxxx                      TOTAL 24 HOUR G2 AIS - xxxxxxxxx                      TOTAL 24 HOUR G2 LFAS - xxxxxxxxx                      TOTAL 24 HOUR G2 LMAS - xxxxxxxxx                      TOTAL 24 HOUR G2 RAI - xxxxxxxxx                      TOTAL 24 HOUR G2 LOS - xxxxxxxxx</p>
<p><b>7</b></p>	<p>Check DCHI card and D-channel (DCH) link status using:</p> <p>LD 96</p> <p>STAT DCH (N)</p> <p>(N is the I/O port number)</p>	<p>The DCHI status should be OPER (operational) and EST (established).</p>
<p><b>8</b></p>	<p>Check to assure the following PRI cables are connected correctly:</p> <ul style="list-style-type: none"> <li>• PRI to DCHI cable</li> <li>• E1/T1 transmission cable from NT8D72AA to DSX (the digital cross connect)</li> </ul>	

## PRI startup

This procedure provides the steps required to take the PRI and DCH from a disabled to an operational state.

### Procedure 5

#### PRI status check

Step	Action	Response
1	Check the status of all PRI cards.	<p>The PRI shown is disabled.</p>  <p style="text-align: right;">553-1340</p>
2	If any other LEDs are lit, go to PRI fault clearing.	
3	Test all PRIs using:  LD 60  DISL loop SLFT L	SLFT OK
4	Enable all PRIs using:  LD 60  ENLL L	PRI000      Correct version ID DTA005      remote alarm DTA007      remote alarm cleared (provided the far end is up) DTA023 DCH1010    PRI loop is up D-channel is disabled

Step	Action	Response
5	Enable the D-channel(s) using:  LD 96  ENL DCH N  (N is the I/O port number)	DCH EST Time and Date  D-channel is established (provided far-end D-channel is OK).  If you do not get the DCH EST response, see the note at step 6.
6	Perform a PRI status check.  <b>Note:</b> If the status check response is RLS, establish the link at this point by entering the command:  EST DCH N  (N is the I/O port number)	

## Network Call Trace

Network Call Trace (NCT) is available to trace a network call and to diagnose network problems. When a network call is blocked, trace data is output indicating the reason the call was blocked and the software procedure responsible.

A network call can be traced by dialing a Special Prefix (SPRE) code and the NCT feature code (9912) before the network number. When this is done, call setup and status information is output to the system terminal as the call tandems through the network. The trace information is output to all the system terminals designated in LD 17 as ADAN = TTY and USER = MTC.

NCT provides useful information such as the following:

- the route used
- the facility accessed
- the routing control imposed
- the call-blocked location

There are two Network Call Trace functions: 01 and 02. They output different information as shown in the following sections.

### Enhanced Trace command output

A time stamp is available to the call trace output. This time stamp appears on the first line of the output.

The Terminal Number (TN) or digital trunk prints out only when there has been a change to the call register. The TN or trunk is printed only once.

Sample time stamp output which appears on the first line:

```
.14:00:02 12/25/1992
```

### Configure Network Call Trace

To configure Network Call Trace, log into the system and do the following:

- Enter NCT in response to prompt RCAP in LD 17 for each D-channel.
- Enter CLTA in response to prompt CLS in LD 10 or LD 11 to allow a telephone to trace calls.

### Trace a call

A call can be traced from any attendant console or a telephone with CLTA class of service. To trace a call, dial the following:

```
SPRE + 9912 + xx + yyy...
```

where

**SPRE** = special function access code (defined in LD 15)

**9912** = NCT feature code

**xx** = call trace function (01, 02)

Dial tone is provided after "xx" is dialed.

**yyy . . .** = digits normally dialed for the network call

### Trace function 01

This function provides the common information related to Electronic Switched Network (ESN) routing. It is the recommended function. The following is the call trace data for function 01:

```
**** NCT xx ****  
<switch specific data>  
--- OUT ---  
<outgoing data>  
--- IN ---  
<incoming data>  
--- STATE ---  
<call state>
```

Where xx is the call trace ID for a traced call. The output data depends on the type of call and can be the following:

CAUSE xxxx—call reject cause  
CREF xxxx—call reference number  
DCH—D-channel number  
DGT xxxxx...—outgoing: digits outpulsed  
DGT xxxxx...—state: digits received (NODE=TBD), or digits dialed when  
the call is rejected (STAT=REJ)  
DN xxx—DN of ringing set  
ENT xx—entry in the outgoing route list  
FCI x—free calling area index  
FRL x—facility restriction level

IFC xxx—outgoing D-channel interface (LD 17 prompt IFC)

D100 = Meridian DMS-100  
D250 = Meridian DMS-250  
ESS4 = AT&T ESS4  
ESS5 = AT&T ESS5  
SL1 = Meridian SL-1  
S100 = Meridian SL-100  
SS12 = Norwegian SYS-12  
AXEA = AXE-10 (Australia)  
UNKN = unknown data received

LOC xxxx—call reject software location

MODE xxx—outgoing termination

ALOG = analog trunk  
DTI = digital trunk interface—1.5 Mb/s  
DTI = digital trunk interface—2.0 Mb/s  
ISL = ISDN Signaling Link  
PRI = Primary Rate Interface  
UNKN = unknown data received

NCOS xx—Network class of service

NODE xxxx—type of node

ORIG = originating node  
TAND = intermediate node (tandem)  
TERM = terminating node  
TBD = node undetermined

RLI xxx—ESN outgoing route list index

RLS xx xx—software release, issue number of node switch

RTE xxx—incoming or outgoing route number

SID xxxx—system identification (LD 17)

STAT xxxx—call state, where xxxx can be

ANS = call answered  
BUSY = termination busy  
DIAL = call state is dialing (mainpm)  
ERR = error detected in this message  
OPULSE = digit outpulsing  
PROC = call proceeding through this node (tandem)  
REJ = call rejected or blocked  
REOR = call state is dialing (mainpm)  
RING = call ringing  
SEIZ = trunk seized

STYP xx—terminating station type

500 = single line telephone (LD 10)  
BCS = multi-line telephone (LD 11)  
ATT = attendant console (LD 12)

TKTP TIE,COT,WAT...—incoming or outgoing trunk type

TKTN loop ch, l s c u—incoming or outgoing B-channel, ISL trunk TN

TN l s c u

TN of originating telephone

TOD x—time of day schedule

TYP I,E —Initial/Extended set

XLT NPA,NXX,LOC...—ESN translation type

### Example 1: Successful call with trace function 01

In this example, the following digits are dialed from a telephone at TN 0 0 5 1.

1+9912++01+78+6000

where

1 = SPRE (defined in LD 15)

9912 = NCT feature code

01 = call trace function 01

78 = PRI route access code (ACOD)

6000 = remote extension

The resulting trace information is output on the maintenance terminal:

```
**** NCT # 22 ****  
NODE ORIG (SL1)  
SID 0 RLS 17 53  
--- OUT ---  
TNS 0 0 5 1  
DCH 5  
IFC SL1  
CREF 22  
MODE PRI  
RTE 24
```

```
TKTP TIE
TKTN 18 22
DGT 6000
--- STATE ---
STAT PROC
```

```
**** NCT # 22 ****
NODE ORIG (SL1)
SID 0
RLS 17 53
--- OUT ---
DCH 5
RTE 24
TKTP TIE
TKTN 18 22
DGT 6000
--- STATE ---
STYP BCS
DN 6000
STAT RING
```

### Example 2: Unsuccessful call with trace function 01

In this example, the same call is made as in example 1, but in this case the D-channel is down.

The resulting trace information is output on the maintenance terminal:

```
**** NCT # 22 ****
NODE ORIG (SL1)
SID 0
RLS 17 53
--- OUT ---
TNS 0 0 5 1
MODE UNKN
--- STATE ---
DGT 786000
STAT REJ
LOC 99
```

### Trace function 02

Call trace function 02 provides the information from the active (main) call register, the incoming call state, and the outgoing call state (if any). Trace function 02 is intended as a debugging tool for system designers.

The information output by function 02 includes the following:

```
NODE ORIG,TAND,TERM,TBD
```

SID xxxx—system identifier  
RLS xx xx—release of software, issue number of node  
TNS l s c u—TN of the originating set  
CREf xxxx—call reference number

Incoming call:

ISTATPM x—incoming state progress mark  
ITRKPM x—incoming trunk progress mark  
LOC xxxx—call reject software location

Outgoing call:

OSTATPM x—outgoing state progress mark  
OTRKPM x—outgoing trunk progress mark  
LOC xxxx—call reject software location

Main call register:

Word 0—MainPM/AuxPM  
Word 1—CRlink  
Word 2—Queue\_In  
Word 3,4—Son\_Types/Processes  
Word 5—Aux\_CRlink  
Word 6—OrigType/TerType  
Word 7—TTR\_TN  
Word 8—OrigTN  
Word 9—TerTN  
Word 10—CallFwdTN  
Word 11—DISA\_Call/XFER\_indication  
Word 12,13—CR\_Dialed\_DN  
Word 14—Digitload/Digitunload  
Word 15-20—digits

### Feature requirements

Network Call Trace is limited to basic ISDN PRI/ISL calls across system private networks.

NCT collects information only during initial call setup. It does not report on further call modification, such as Call Transfer.

Network call information is lost and the call trace ceases when any of the system nodes in which the call is being traced is initialized or any of the D-channels fails.

Although NCT requires PRI or ISL, calls can be traced to nodes that do not support Network Call Trace. Calls can also be traced to DTI or analog trunks. However, only the local node information is provided. These are the trunk types that are not supported: ADM, AWU, DIC, MDM, MUS, PAG, RAN, RLM, and RLR.

Call trace information is still output if the call is blocked before the trunk is seized. If queuing (Ring Again, CBQ or OHQ) is available, then the original call trace function is activated when the call is offered to the user.

When a remote system without NCT capability receives a Call Trace message, no call trace information is returned.



---

# Primary Rate Interface maintenance

---

## Contents

This section contains information on the following topics:

- "PRI commands (LD 60)" (page 40)
- "PRI alarm commands" (page 42)
- "PRI test commands" (page 44)
- "PRI tests" (page 44)
  - "PRI self-test" (page 44)
  - "PRI automatic loop test" (page 45)
  - "PRI midnight routines" (page 46)
  - "Link diagnostic and remote loop-back tests" (page 46)
- "PRI error detection" (page 48)
  - "Bit error rate" (page 48)
  - "Bit error rate thresholds" (page 48)
  - "Frame slip" (page 50)
  - "Frame alignment" (page 52)
- "TN-to-channel number conversion" (page 53)
- "Use the error counter" (page 54)
- "Replace the PRI" (page 56)
- "Pulsed E and M DTI2 signaling" (page 57)
  - "Error messages" (page 57)
  - "Diagnostics" (page 58)

## PRI commands (LD 60)

Primary Rate Interface (PRI) diagnostic commands are used to maintain both PRI and clock-controller operation. See [Table 7 "PRI card and channel commands in LD 60" \(page 40\)](#) for a list of the PRI card and channel commands in LD 60. The commands are organized as follows:

- PRI card and channel commands
- Alarm and counter commands
- Test commands

**Table 7**  
**PRI card and channel commands in LD 60**

Command	Description
DISI L	PRI loop L is disabled only when all the channels are idle. The network and PRI cards are then disabled and status LEDs are lit. <b>Channel status is set to busy</b> . Enter END to abort.
DISL L	Disables network and PRI circuit packs of loop L. Active calls are automatically disconnected by on-hook simulation. <b>All channels are disabled</b> and status LEDs are lit.
DSCH L CH	All channels of loop L are disabled.
ENCH L CH	All channels of loop L are enabled.
ENLL L	Enables PRI loop L. Channel CH of PRI loop L is enabled. The channel is placed into the idle state and made available for calls.
STAT	Prints the status of all digital loops.
STAT loop	Get status of digital loop. Sample output:  AAA TRK LOOP x - BBBB SERVICE RESTORE: YES/NO YEL ALM PROCESS: YES/NO ALARM STATUS: NO ALARM/RED(local) ALARM  Where: AAA may be:  DTI  DTI2  PRI  PRI

Command	Description
	<p>TIE</p> <p>DID</p> <p>DTI LINK (DTI link loop = DLI) Where: BBBB may be:</p> <p>DSBL = Hardware of specified digital loop is disabled</p> <p>ENBL = Hardware of specified digital loop is enabled</p> <p>RLBK = Hardware of specified digital loop is in remote loop back mode</p> <p>DISI PENDING = DSI command is in progress</p> <p>TRACKING = System clock is tracked to this loop</p> <p>IDLE = Hardware of specified digital loop is idle</p> <p>When AAA = TIE, IDLE ISPC indicates that the channel is an established ISPC link ready to be used by any end users having access to the associated ISPC route.</p> <p>SERVER RCVY = server has not recovered status of DTI LINK loop. Channels will not be allocated for call processing until this status is removed by the server</p> <p>BUSY = Hardware of specified digital loop is busy</p> <p>When AAA = TIE, BUSY ISPC indicates that the channel is an established ISPC link which is used by end users on the PBXs.</p> <p>When AAA = DID, BUSY ISPC indicates that the ISPC link is established to the Central Office. The status "BUSY" is independent to ISL feature usage of the ISPC link.</p> <p>MBSY = Hardware of specified digital loop is in make busy mode</p>

Command	Description
	<p>When AAA = TIE, MBSY ISPC indicates that the configured ISPC link is one of the following:</p> <ul style="list-style-type: none"> <li><b>a</b> not established yet</li> <li><b>b</b> established, but the ISL D-channel which controls its usage not established</li> </ul> <p>Where: SERVICE RESTORE may be:</p> <p>YES = restore service automatically if alarm is removed</p> <p>NO = loop can only be manually enabled</p> <p>Where: YEL ALARM PROCESS may be:</p> <p>YES = Yellow alarm processing is enabled</p> <p>NO = Yellow alarm processing is disabled</p> <p>Where: ALARM STATUS may be:</p> <p>NO ALARM = no alarm active</p> <p>RED = Red (local) alarm active</p>

## PRI alarm commands

See [Table 8 "PRI alarm commands in LD 60" \(page 42\)](#) for a list of PRI alarm commands and descriptions of these commands. These commands appear in LD 60.

**Table 8**  
**PRI alarm commands in LD 60**

Command	Description
CDSP	Clears the maintenance display on active CPU to 00 or blank.
CMIN C	Clears the minor alarm indicator for customer C.
CMIN ALL	Clears the minor alarm indicators for all customers.
LCNT	Prints content of all alarm counters of all PRI loops.

Command	Description
LCNT L	<p>Prints content of all alarm counters of PRI loop L. The counters are:</p> <p>BPV Bipolar violation bit error rate counter. Indicates the number of times the loop has entered state due to excessive bipolar violations.</p> <p>FAP Number of times the loop has entered state due to excessive frame bit errors.</p> <p>SLP Frame slip repetition counter. The number of times the loop has entered state due to excessive frame slips.</p> <p>CRC Cyclic Redundancy Check (CRC) bit error rate counter. The number of times the loop has entered state due to CRC frame errors.</p> <p>G2 The number of times the loop has entered state due to excessive group 2 errors.</p> <p>TOTAL 24 HOUR BPV 24-hour bit error rate count</p> <p>TOTAL 24 HOUR FAP 24-hour frame bit error rate count</p> <p>TOTAL 24 HOUR SLP 24-hour slip count</p> <p>TOTAL 24 HOUR CRC 24-hour CRC error count</p> <p>TOTAL 24 HOUR G2 AIS 24-hour alarm indication signal count</p> <p>TOTAL 24 HOUR G2 LFAS 24-hour loss of frame alignment count</p> <p>TOTAL 24 HOUR G2 LMAS 24-hour loss of multiframe alignment count</p> <p>TOTAL 24 HOUR G2 RAI 24-hour remote alarm indication count</p> <p>TOTAL 24 HOUR G2 LOS 24-hour loss of signal count</p>
RSET L CH	Resets the thresholds for PRI loop L, trunk channel CH.

Command	Description
RCNT	Resets all alarm counters of all PRI loops.
RCNT L	Resets all alarm counters of PRI loop L.

## PRI test commands

See [Table 9 "PRI test commands in LD 60" \(page 44\)](#) for a list of the PRI test commands and a corresponding description of these commands. The PRI test commands are in LD 60.

**Table 9**  
**PRI test commands in LD 60**

Command	Description
ATLP (0) 1	Automatic loop test enable (= 1) or disable (= 0) default.  1 = Loop test enable; this will cause far end to raise and clear remote alarm.  0 = Run the partial loop test; there is no interaction for the far-end loop (default value).
SLFT L	Invokes PRI self-test on loop L. The loop must be disabled because the test disrupts call processing.
SLFT L CH	Invokes partial PRI hardware self-test using channel CH of loop L.
RLBK L	Closes the loop at the carrier interface point of the PRI so the far end can perform an external loopback test. PRI loop L must be disabled because the test disrupts call processing.
DLBK L	Disables the remote loopback test per RLBK L. The loop remains disabled.
DLBK L CH	Disables the remote loopback test per RLBK L CH. The channel remains disabled.
RLBK L CH	Per RLBK L, but performed on channel CH. This channel must be disabled prior to issuing the request.
RMST L	Performs self-test on loop L, providing the far end is in the remote loopback mode.
RMST L CH	Performs self-test on channel CH, providing the far end is in the remote loopback mode.

## PRI tests

### PRI self-test

The self-test checks speech-path continuity, zero-code suppression, and remote-alarm detection. This test is performed manually on a per-channel or a per-frame basis.

The DCHI and PRI must be disabled before performing the self-test, or call processing will be disrupted. To perform the self-test on a specific loop, follow [Procedure 3 "PRI self-test" \(page 45\)](#).

### Procedure 3

#### PRI self-test

---

Step	Action
------	--------

---

- |   |                                                                                |
|---|--------------------------------------------------------------------------------|
| 1 | Disable the DCHI using:<br>LD 96<br>DIS DCH N                                  |
| 2 | Disable the PRI loop and run the self-test using:<br>LD 60<br>DISL L<br>SLFT L |
- 

—End—

---

### PRI automatic loop test

The automatic loop test checks the same functions as the self-test. Unlike the self-test, the loop test can be run automatically, as part of the midnight routines.

With the ATLP command set to one, follow Procedure 7.

### Procedure 4

#### PRI automatic loop test

---

Step	Action
------	--------

---

- |   |                                                                                                                                                |
|---|------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | If all 30 channels are idle at midnight, SL-1 software disables the card and performs a self-test on all channels.                             |
| 2 | If any of the 30 channels are busy at midnight, software disables one idle channel, chosen at random, and checks it while the card is enabled. |
- 

—End—

---

With the ATLP command set to zero, only one channel is tested. The channel tested is randomly selected by software; it cannot be specified.

To perform the remote loopback test, use:

```
LD 60
```

```
ATLP 1 or 0
```

### **PRI midnight routines**

The following PRI maintenance routines should be included in midnight routines:

- Overlay 45: Background signaling and switching diagnostic
- Overlay 95: Automatic trunk maintenance diagnostic
- Overlay 48: Link diagnostic

### **Link diagnostic and remote loop-back tests**

The remote loopback test and the link-diagnostic test are performed manually on a per-channel or a per-frame (30 channels) basis.

#### **Link diagnostic test**

The link-diagnostic test, also called the far-end loopback test, does not test the local PRI. It puts the PRI in loopback mode so a remote loopback test can be performed on equipment at the far end.

The PRI channel or frame being tested must be disabled.

#### **Remote loopback test**

The remote loopback test, also called the near-end loop-back test, checks the integrity of the PRI from the near end to the far end. The far end must be in loopback mode before this test can be performed.

The PRI channel or frame tested must be disabled.

### **Coordinating the tests**

When a technician at the far end asks for loopback mode on the PBX:

Disable the DCHI using:

```
LD 96
```

```
DIS DCH N
```

Disable the PRI loop and activate loopback mode using:

```
LD 60
```

```
DISL L
```

```
RLBK L
```

To run the remote loopback test on the PBX, follow [Procedure 5 "Remote loopback test"](#) (page 47).

**Procedure 5**  
**Remote loopback test**

---

**Step Action**

---

- 1 Call a technician at the far end.
- 2 Ask for loopback mode at that facility.
- 3 When loopback mode at the far end is confirmed:  
 Disable the DCHI using:  

```
LD 96
DIS DCH N
```

 Disable the PRI loop and run loopback test using:  

```
LD 60
DISL L
RMST L
```


---

—End—

---

"PRI link-diagnostic and remote loopback tests" (page 47) shows the relationship between the remote loop-back test and the link-diagnostic test.

**PRI link-diagnostic and remote loopback tests**

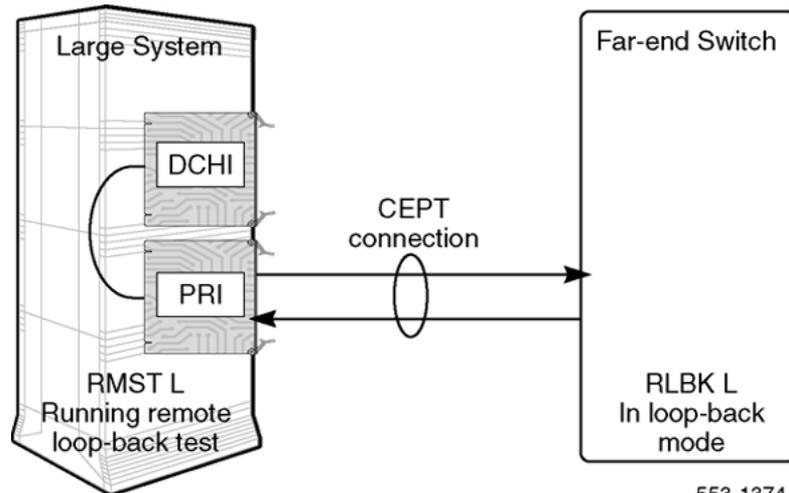

## PRI error detection


### Bit error rate

Bit-error-rate monitoring detects errors in transmission. See [Figure 2 "Bipolar violations"](#) (page 48).

### Bipolar violation (BPV) tracking

In a bipolar pulse stream, pulses alternate in polarity. A bipolar violation has occurred if, after transmission, two pulses of the same polarity are received in succession (this could be caused by an electrical disturbance such as noise).

**Figure 2**  
**Bipolar violations**

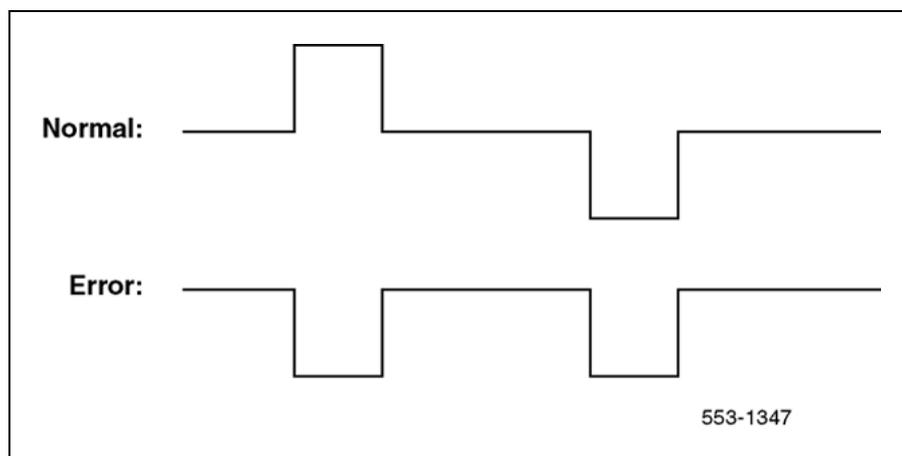

### Cyclic redundancy check (CRC)

The Extended Superframe Format (ESF) contains a checksum of all the data in the frame. The receiving side uses the checksum to verify the data.

The primary difference between BPV and CRC is that bipolar violation tracking indicates errors on the local span, while CRC indicates errors on an end-to-end span. For example, on a satellite link, BPV only detects errors in the span between the system and the satellite connection. Since CRC traverses the entire span, it indicates an end-to-end bit error rate.


The CRC error counter is displayed with the LCNT L command in LD 60 provided that loop L has been defined with ESF as a framing format. The framing format (D2, D3, D4, or ESF) is selected in LD 17 when the loop is configured.

### Bit error rate thresholds

There are three bit error rate thresholds set in LD 73. When a threshold is reached, a DTA message is output. See [Figure 3 "BIPV and BIPC thresholds"](#) (page 49).

- DTA011: Bit error rate maintenance threshold.  
 DTA012: Bit error rate out-of-service limit.  
 DTA013: Too many bit error rate out-of-service occurrences in 24 hours.

**Figure 3**  
**BIPV and BIPC thresholds**

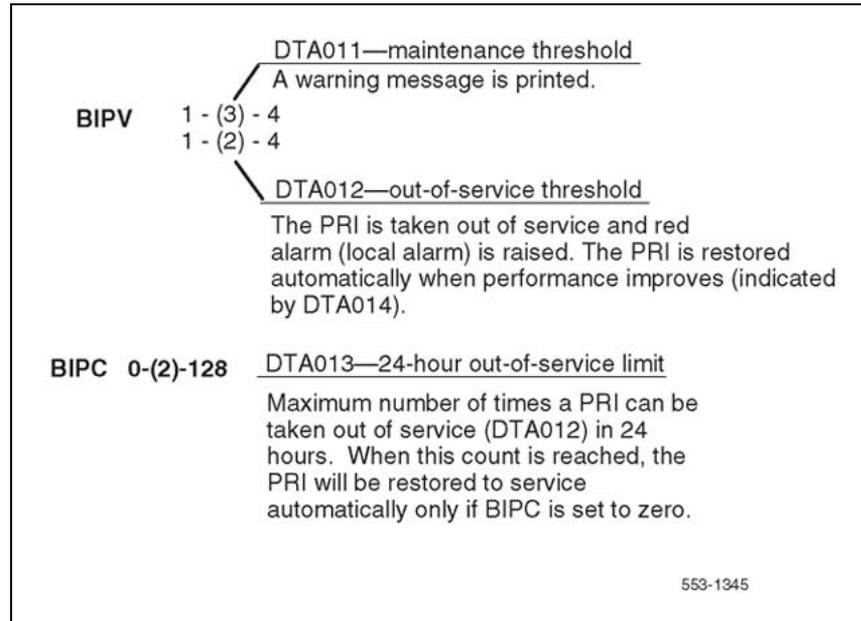

The BIPV thresholds are based on the number of errors in a given time. The threshold levels are shown in [Table 10 "BIPV thresholds" \(page 49\)](#).

For example, if the default BIPV thresholds are used, DTA011 is output when the number of errors exceed 15.4 per second. DTA012 is output when the number of errors exceeds 154 per second.

When the error rate improves two levels, the PRI is restored to service unless the 24-hour out-of-service counter was exceeded.

**Table 10**  
**BIPV thresholds**

Level	Error rate	Elapsed time (seconds)	Number of BPV allowed during elapsed time
least tolerant			
1	>10-3 (1544 BPV per s)	0.6639	1025
2	>10-4 (154 BPV per s)	6.639	1025
3	>10-5 (15.4 BPV per s)	66.39	1025

Level	Error rate	Elapsed time (seconds)	Number of BPV allowed during elapsed time
4 most tolerant	>10 <sup>-6</sup> (1.54 BPV per s)	663.9	1025

### Frame slip

Digital signals must have accurate clock synchronization for data to be interleaved into or extracted from the appropriate timeslot during multiplexing and demultiplexing operations. Frame slip monitoring detects frame deletion and repetition errors in clock synchronization. See [Figure 4 "DTA messages" \(page 50\)](#).


Clock synchronization can be either tracking, on the primary or secondary reference clock, or free run (non-tracking). In LD 73 (prompts PREF and SREF), one PRI may be defined as the primary clock reference. Another may be defined as the secondary clock reference. All others are defined as free run.

PRI hardware detects frame slips in tracking and free run modes. For tracking mode, running the midnight routines prints the number of overflows and clears the counter. For free run mode, running the midnight routines prints the number of frame deletions and repetitions and clears the counters.

**Tracking mode** There are two thresholds set in LD 73. When a threshold is reached, a DTA message is, as follows:

- DTA015: Maintenance limit for frame slips in tracking mode.
- DTA016: Out-of-service limit for frame slips in tracking mode.

**Figure 4**  
DTA messages

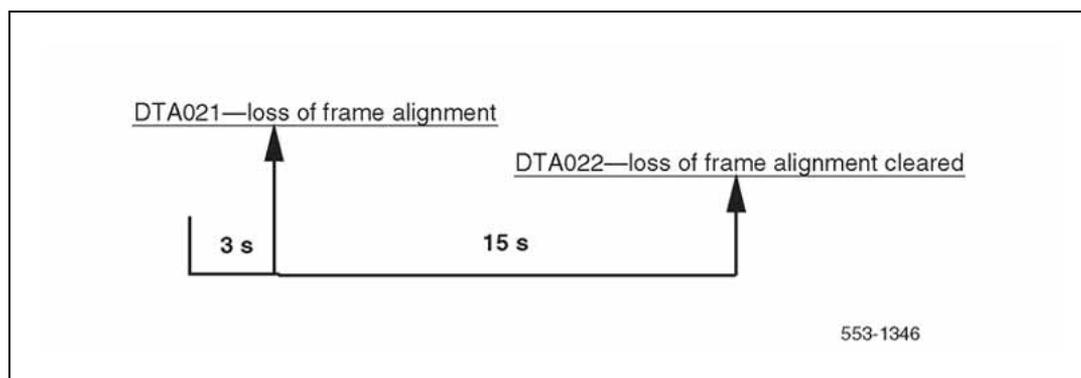


**Free run (non-tracking) mode** A maintenance threshold and an out-of-service threshold are set in LD 73. When these thresholds are reached, DTA messages are output. An option in LD 73 can enable

automatic recovery after the out-of-service limit has been reached. Related DTA messages are described below. See [Figure 5 "DTA thresholds" \(page 51\)](#).

DTA017:	Maintenance limit for frame slips in free run (non-tracking) mode. The default is 10 slips in 15 seconds.
DTA018:	Out-of-service limit for frame slips in free run (non-tracking) mode without automatic recovery selected. The default is 10 slips in three seconds.
DTA026:	Non-tracking frame slip out-of-service threshold reached while monitoring frame slip rate for improvement. Trunks remain out of service. Reset improvement timer.
DTA028:	Slip rate improvement criterion is met. Trunks are brought back into service. Reset improvement timer. (Duration of timer selected in LD 73.)
DTA029:	Slip rate improvement criteria is met. Trunks being returned to service.

**Figure 5**  
**DTA thresholds**

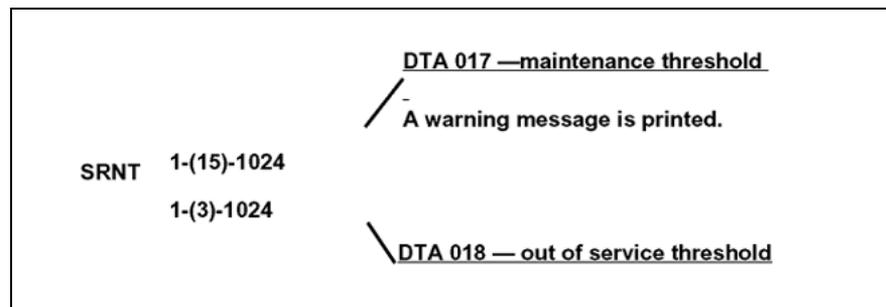

**Automatic recovery** After the tracking mode or non-tracking mode out-of-service thresholds are exceeded, the slip rate is monitored for improvement. When the slip rate has improved, the trunks are returned to service.

There are two parameters set in LD 73:

SRIM	(1) - 127	improvement timer in minutes
SRMM	1 - (2) - 127	improvement criteria

If the non-tracking mode maintenance threshold is exceeded SRMM or fewer timers in the duration of SRIM, then the trunks are returned to service. If not, the timer is restarted and monitoring continues.

Frame slippage is considered less important than alarms for loss of frame alignment persisting for three seconds, remote alarm, and bipolar violations exceeding the out-of-service threshold. If any of these alarms are reported while the slip rate is being monitored for improvement, then the monitoring stops. The trunks are returned to service only when the more serious alarms clear.

### Frame alignment


Loss of frame alignment monitoring detects out-of-frame conditions on the DS-1 bit stream. See [Figure 6 "Frame alignment" \(page 52\)](#).

**Loss of frame alignment thresholds** PRI hardware detects out-of-frame conditions. Running the midnight routines prints the number of occurrences when frame alignment was lost and clears the counters.

There are three frame alignment thresholds set in LD 73. When a maintenance or out-of-service threshold is reached, a DTA message is output as follows:

DTA019:       Frame alignment maintenance limit  
DTA020:       Frame alignment out-of-service limit

**Figure 6**  
**Frame alignment**

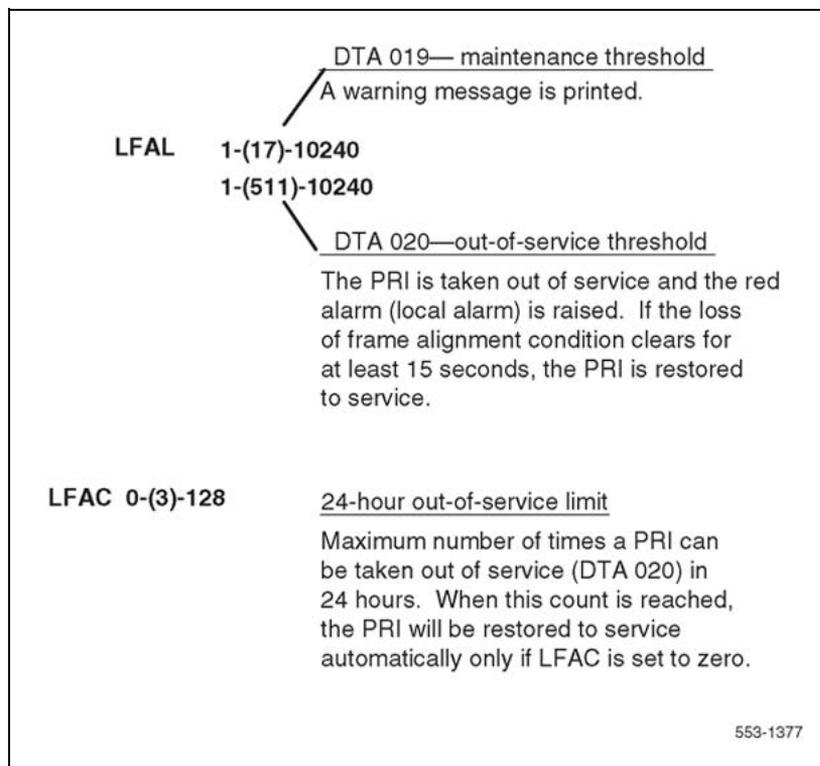


If a loss of frame alignment condition persists for three seconds, the affected PRI loop is taken out of service and a Red alarm (local alarm) is raised. See [Figure 7 "Frame alignment loss"](#) (page 53).

If the loss of frame alignment condition clears for at least 15 seconds, the PRI is automatically restored to service. The following DTA message is generated:

DTA021: Loss of frame alignment has persisted for 3 seconds.

**Figure 7**  
**Frame alignment loss**

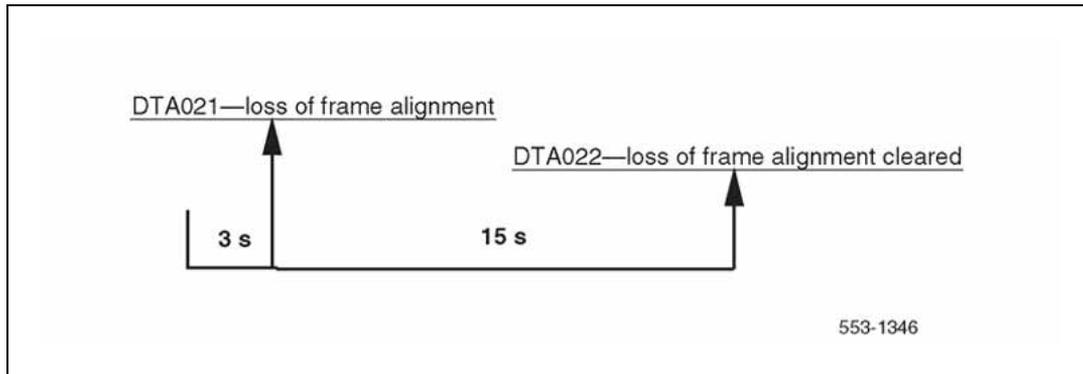

## TN-to-channel number conversion

PRI channel numbers have an equivalent Terminal Number (TN). The TN is output instead of the channel number in some system messages. The TN-to-channel number translation is shown in [Table 11 "PRI channel numbers and equivalent terminal numbers"](#) (page 53). Note that the translation is different for the D2 framing format than formats for D3, D4 or ESF.

Terminal numbers are identified in software by Loop (L), Shelf (S), Card (C), and Unit (U) numbers. Each TN is applied to an individual channel on the PRI card. See [Table 11 "PRI channel numbers and equivalent terminal numbers"](#) (page 53).

**Table 11**  
**PRI channel numbers and equivalent terminal numbers**

Channel number	D2 format TN (S C U)	D3, D4,E SF format TN (S C U)
1	1 4 0	0 1 0
2	1 5 0	0 2 0
3	0 1 0	0 3 0

Channel number	D2 format TN (S C U)	D3, D4,E SF format TN (S C U)
4	2 1 0	0 4 0
5	0 5 0	0 5 0
6	2 5 0	0 6 0
7	1 1 0	0 7 0
8	1 7 0	1 8 0
9	0 3 0	1 1 0
10	2 3 0	1 2 0
11	0 7 0	1 3 0
12	2 7 0	1 4 0
13	1 3 0	1 5 0
14	1 6 0	1 6 0
15	0 2 0	1 7 0
16	2 2 0	2 8 0
17	0 6 0	2 1 0
18	2 6 0	2 2 0
19	1 2 0	2 3 0
20	2 8 0	2 4 0
21	0 4 0	2 5 0
22	2 4 0	2 6 0
23	1 8 0	2 7 0
24	3 8 0	3 8 0

### Use the error counter

The error counter detects bipolar violations or no-signal periods. It counts, stores, and displays these occurrences to a maximum of 9999.

The PRI fault detection and isolation procedures described in this section are performed using a portable test package, which consists of one each of the following items:

- the TTT2028 Mini-Error Counter, plus operation instruction card
- a cord equipped with a bantam plug at one end and minihooks at the other
- a loopback plug (shorts pins 3 to 1 and 11 to 9 of a 15-pin D connector)

**Procedure 6**  
**Using the error counter**

**Step Action**



**CAUTION**

To prevent injury from voltage on the span, always connect the patch cord into the test set before connecting the other end to the external signal source.

- 1 Plug one end of a patch cord into the input jack of the test set.
- 2 Plug the other end of the patch cord into one of the monitor jacks (RCV and XMT) of the PRI card being tested.
- 3 Monitor the error counter LED indicators as described in [Table 12 "Error counter switch functions" \(page 55\)](#) and [Table 13 "Error counter display functions" \(page 55\)](#).

**Table 12**  
**Error counter switch functions**

Switch	Function
Display Enable	When held down, the switch enables the counter display and the GOOD and O/R LED displays.
Reset	Used to zero the counter.
Error/Error	Used to select error counting seconds for bipolar violations or error-seconds.

**Table 13**  
**Error counter display functions**

Display	Function
GOOD	Indicates the presence of an acceptable bipolar signal. (If bipolar violations, missing pulses, or an oscillating line are detected, the indicator is off.)
ERR	Flashes when bipolar violations are detected.
W/M	Indicates no input (absence of pulse) or an oscillating line.
O/R	Over range display turns on when the counter input has exceeded 9999 (the counter resets to 0000).

Display	Function
CNTR	With Error/Error-Second switch in the Error position, the unit counts errors at a maximum rate of 200 per second.  With Error/Error-Second switch in the Error-Second position, the unit counts error seconds at a rate of one per second.

---

—End—

---

## Replace the PRI

### Procedure 7

#### Replacing the PRI circuit card

Step	Action
 <p><b>CAUTION</b> Firmly touch the metal frame of the cabinet to discharge static electricity from your body before handling circuit cards.</p>	
1	Disable the D-channel using the following:  LD 96 DIS DCH x
2	Disable the PRI loop using the following:  LD 60 DISL loop
3	Disconnect cables on PRI faceplate.
4	Remove the PRI card.
5	Make sure that the new PRI card switch settings are the same as the faulty PRI card.
6	Install the new PRI card in the appropriate slot.
7	Connect the network loop cable, the carrier interface cable, and the echo canceller cable. If the PRI card is defined as a primary or secondary clock source, connect the Clock Controller cable(s).



- 8 Test the PRI card using the following:
- ```
LD 60
SLFT loop
```
- If an error message results, see PRI fault clearing, beginning on page 15.
- 9 Enable the PRI using the following:
- ```
LD 60
ENLL loop
```

---

—End—

---

## Pulsed E and M DTI2 signaling

### Error messages

**DTA322** loop channel start-bits pulsed-bits end-bits duration

An invalid pulsed signal has been received from the DTI.

loop = the loop number the signal was received on

channel = the channel number the signal was received on

start-bits = the bit pattern before analysis of the pulse

pulsed-bits = the ABCD bit pattern which was possibly part of a pulsed signal


end-bits = the ABCD bit pattern received after the pulse

duration = the length of the pulse in msec.

[Figure 8 "Loop channel start-bits pulsed-bits end-bits duration"](#) (page 57) illustrates loop channel start-bits, pulsed-bits, and end-bits duration.

**Figure 8**

**Loop channel start-bits pulsed-bits end-bits duration**

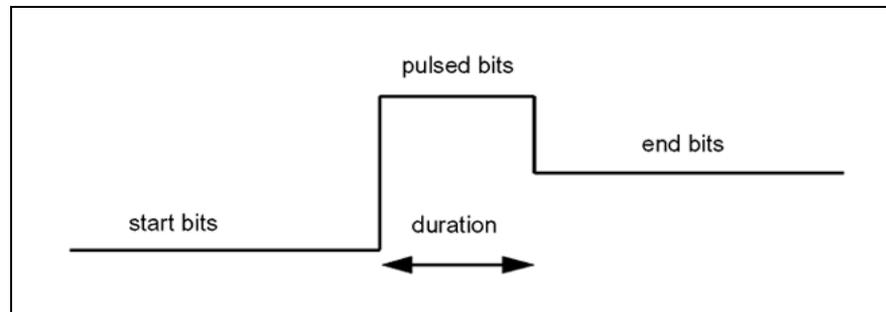

**DTRK500** loop channel

A forward release message has been sent but not acknowledged by a backward release. Check the configuration of the trunk at each end.

loop = the loop number of the trunk which sent the forward release

channel = the channel number of the trunk which sent the forward release.

**DTA205** loop e

The CI-1 firmware has encountered a problem. Refer to DTIOO9 for CI-1 microprocessor error codes (e).

**DTA205** loop 128

This error message may result from an attempt to use the software with DTI2 cards prior to QPC915C or QPC536E. New functionality has been introduced in the DTI2 cards. The old cards ignore attempts to use the functionality introduced in these new cards.

**Diagnostics**

To print the last sent and received signal, use Overlay 80 - Call Trace. The following print format is used:

```
ACTIVE TN DTI 008 03
ORIG DTI 008 03 DID RMBR 33 1 CALL TYPE VOD
SICA 3
SENT CONN 0101 RECV CONN 0001
PDCA 1 PAD 15 2 PCML A A
TERM 004 0 03 01 0 SCR 0 401 2317
DIAL DN 401
MAIN PM ESTD
TALKSLOT ORIG 15 TERM 15
QUEU NONE
```

The SENT bits indicate the steady state on the line once the pulse is complete. The RECV bits indicate the last bit pattern received on the trunk channel.

---

# D-channel maintenance

---

## Contents

This section contains information on the following topics:

- "DCH commands (LD 96)" (page 59)
- "DCH tests" (page 62)
  - "DCH tests 100 and 101" (page 63)
  - "DCH tests 200 and 201" (page 64)
- "DCH traffic (LD 2)" (page 66)
  - "TFS009 D-channel" (page 67)
- "MSDL local loopback test (NT6D80)" (page 70)
- "MSDL remote loopback tests (NT6D80)" (page 71)
- "Protocol log (PLOG)" (page 73)
- "Replace the DCHI" (page 76)
- "LD 60 - Loop Maintenance for SYS-12, AXE-10, SWE, SWISSNET, NUMERIS, EuroISDN, NEAX-61, Asia-Pacific" (page 77)

## DCH commands (LD 96)

Table 14 "D-channel commands, LD 96" (page 59) contains the basic D-channel (DCH) commands in LD 96.

**Table 14**  
**D-channel commands, LD 96**

Command	Description
DIS AUTO x	Disable automatic recovery for DCH x.
DIS DCH x	Disable DCH x.
DIS MSGI x (options)	Disable the monitoring of incoming messages on D-channel x.
DIS MSGI <dch> debg CH <loop><channel>	

Command	Description
	Disable the debugging of all monitored incoming messages from D-channel card. A maximum of 5 channels are monitored at a time. Only one channel number can be entered in one command.
DIS MSGI x FEAT CPNW	Disable incoming monitoring for the Network CPNW ISDN messages on D-channel x.
DIS MSGI <dch> debg MSG msg1 msg2 msg3	
	Disable the debugging of all monitored incoming messages from D-channel. This command can be entered more than once. Only 3 message mnemonics can be given in one command.
DIS MSGI <dch> debg SET	
	Disable debug SET on all incoming messages from D-channel. This set-based filtering is enhanced for UIPE proprietary messages.
DIS MSGO x (options)	Disable the monitoring of outgoing messages on D-channel x
DIS MSGO <dch> debg CH <loop><channel>	
	Disable the debugging of all monitored outgoing messages from D-channel card. A maximum of 5 channels are monitored at a time. Only one channel number can be entered in one command.
DIS MSGO x FEAT CPNW	Disable outgoing monitoring for the Network CPNW ISDN messages on D Channel x.
DIS MSGO <dch> debg MSG msg1 msg2 msg3	
	Disable the debugging of all monitored outgoing messages from D-channel. This command can be entered more than once. Only 3 message mnemonics can be given in one command.
DIS MSGO <dch> debg SET	
	Disable debug SET on all outgoing messages from D-channel. This set-based filtering is enhanced for UIPE proprietary messages.
DIS SERV x	Disable service messages on D-channel x
DLIF DCH x	Force download of D channel x (For PRI UIPE application).
ENL AUTO x	Enable automatic recovery for DCH x.
ENL DCH x (FDL)	Enable DCH x and attempt to establish the link, and force download to MSDL.

Command	Description
ENL MSGI x (options)	Enable the monitoring of incoming messages on D-channel x.
ENL MSGI <dch> debug CH <loop><channel>	
	Enable the debugging of all monitored incoming messages from D-channel card. A maximum of 5 channels are monitored at a time. Only one channel number can be entered in one command.
ENL MSGI x FEAT CPNW	Enable incoming monitoring for the Network CPNW ISDN messages on D-channel x.
ENL MSGI <dch> debug MSG msg1 msg2 msg3	
	Enable the debugging of all monitored incoming messages from D-channel. This command can be entered more than once. In one command, only 3 message mnemonics can be given.
ENL MSGI <dch> debug SET	
	Enable debug SET on all incoming messages from D-channel. This set-based filtering is enhanced for UIPE proprietary messages.
ENL MSGO x (options)	Enable the monitoring of outgoing messages on D-channel x.
ENL MSGO <dch> debug CH <loop><channel>	
	Enable the debugging of all monitored outgoing messages from D-channel card. A maximum of 5 channels are monitored at a time. Only one channel number can be entered in one command.
ENL MSGO x FEAT CPNW	Enable outgoing monitoring for the Network CPNW ISDN messages on D-channel x.
ENL MSGO <dch> debug MSG msg1 msg2 msg3	
	Enable the debugging of all monitored outgoing messages from D-channel. This command can be entered more than once. Only 3 message mnemonics can be given in one command.
ENL MSGO <dch> debug SET	
	Enable debug SET on all outgoing messages from D-channel. This set-based filtering is enhanced for UIPE proprietary messages.
ENL SERV x	Enable service messages on D-channel x.
EST DCH x	Establish multiple frame operation on D-channel x.

Command	Description
EST ISPC I ch (N)	Start the data interface establishment process at the ISPC slave side an ISPC link (where "N" = the "number of tries" counter).
FDIS NCAL <DCH#> <conn_ID>	Force disconnect the specified call-independent connection.
PLOG DCH x	Print protocol error log on D-channel x.
RLS DCH x	Release D-channel x.
RLS ISPC I ch	Stop the data interface establishment process.
RST DCH x	Reset D-channel x, inhibit signaling.
RST MON	Reset or reactivate monitoring on D-channels with enabled monitors.
SDCH DCH x	Switch to the standby D-channel x.
SET MSGI x MON (0)-2	Set monitor output format level for incoming messages on D-channel x.
SET MSGO x MON (0)-2	Set monitor output format level for outgoing messages on D-channel x.
SLFT TMDI x	Invoke self-test x
STAT DCH (x)	Get status of one or all D-channels
STAT ISPC I ch	Get status of data interface establishment process at ISPC slave side ISPC link which has been configured to convey D-channel signaling.
STAT NCAL <DCH#>	List all current call-independent connections on a given PRI D-channel.
STAT NCAL <DCH#> <conn_ID>	
	List information pertaining to a specific call-independent connection.
STAT MON (x)	Display the incoming and outgoing monitoring status of one or all D-channels.
STAT SERV (x)	Get the enable/disable status of services messages for one or all D-channels.
STAT TMDI (x FULL)	Get TMDI status x.

## DCH tests

There are four types of DCH tests. They are:

- DCH test 100
- DCH test 101
- DCH test 200

- DCH test 201

The DCH tests 100 and 101 are hardware tests, while the 200 and 201 test the DCH software.

### DCH tests 100 and 101

DCH tests 100 and 101 are isolated hardware tests. See [Figure 9 "DCH tests 100 and 101" \(page 64\)](#). Test 100 checks interrupt generation on the DCHI. Test 101 checks the DCHI loopback capability. If either test fails, either a faulty DCHI or a contention problem is indicated. A test failure initiates DCH error messages.

Tests 100 and 101 must be run in sequential order (tests 200 and 201 may follow). Established calls stay up, but new calls cannot be placed.


#### Procedure 8

#### Testing DCHI hardware

Step	Action
1	Log in to the overlay system. Then, enter LD 96 by entering the command.  LD 96
2	If the DCHI link is disabled, it must be enabled by entering the commands.  STAT DCH N (responds <b>DSBL</b> )  ENL DCH N (if a problem caused the disabled state, RLS will occur; if the disabled state is cleared, status will be EST).  RST DCH N
3	Place the DCHI link in the reset state (from either the established or Released state) by entering the commands.  STAT DCH N (responds either <b>EST</b> or <b>RLS</b> )  RST DCH N
4	Activate the first hardware test by entering the command.  TEST 100 N
5	Activate the second hardware test by entering the command.  TEST 101 N

—End—

**Figure 9**  
**DCH tests 100 and 101**

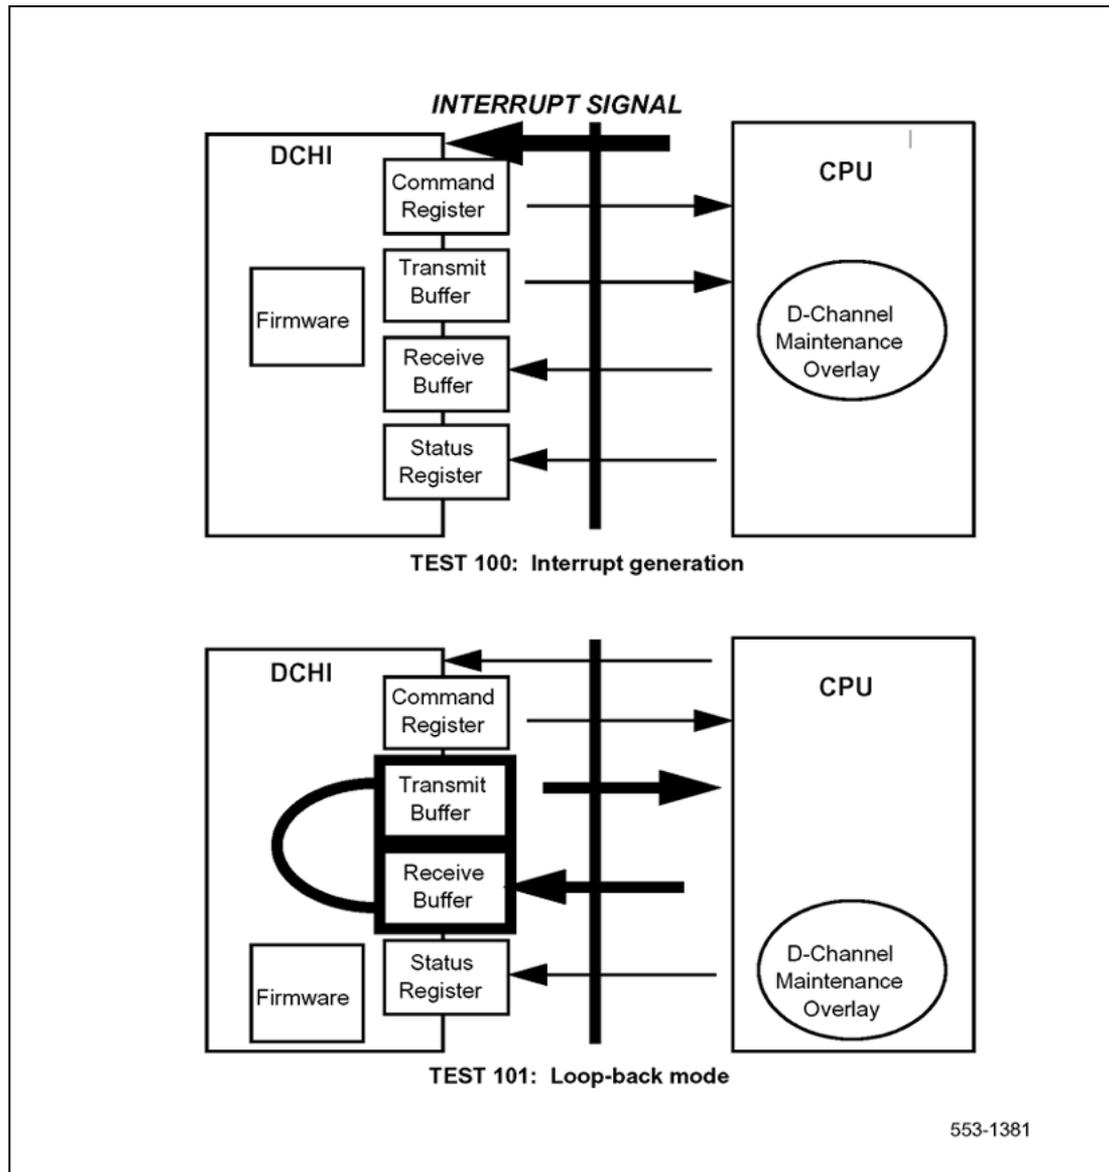

### DCH tests 200 and 201

DCH tests 200 and 201 are software tests. See [Figure 10 "DCH tests 200 and 201" \(page 66\)](#). Test 200 monitors the DCHI interrupt handler. Test 201 checks the interrupt handler-to-link interface path. If either test fails, software problems are indicated. A test failure initiates DCH error messages.

Tests 200 and 201 must be run sequentially after tests 100 and 101. Established calls stay up, but new calls cannot be placed

---

**Procedure 9**  
**Testing DCHI software**

---

**Step Action**

---


- 1** Log in to the overlay system. Then, enter overlay program 96 by entering the command  
`LD 96`
- 2** If the DCHI link is disabled, it must be enabled by entering the commands  
`STAT DCH N` (responds `DSBL`  
`ENL DCH N`(if a problem caused the disabled state, RLS will occur; if the disabled state is cleared, status will be EST)  
`RST DCH N`
- 3** Place the DCHI link in the reset state (from either the established or Released state) by entering the commands  
`STAT DCH N` (responds either `EST` or `RLS`)  
`RST DCH N`
- 4** Activate the first software test by entering the command  
`TEST 200 N`
- 5** Activate the second software test by entering the command  
`TEST 201 N`

---

—End—

---

**Figure 10**  
**DCH tests 200 and 201**

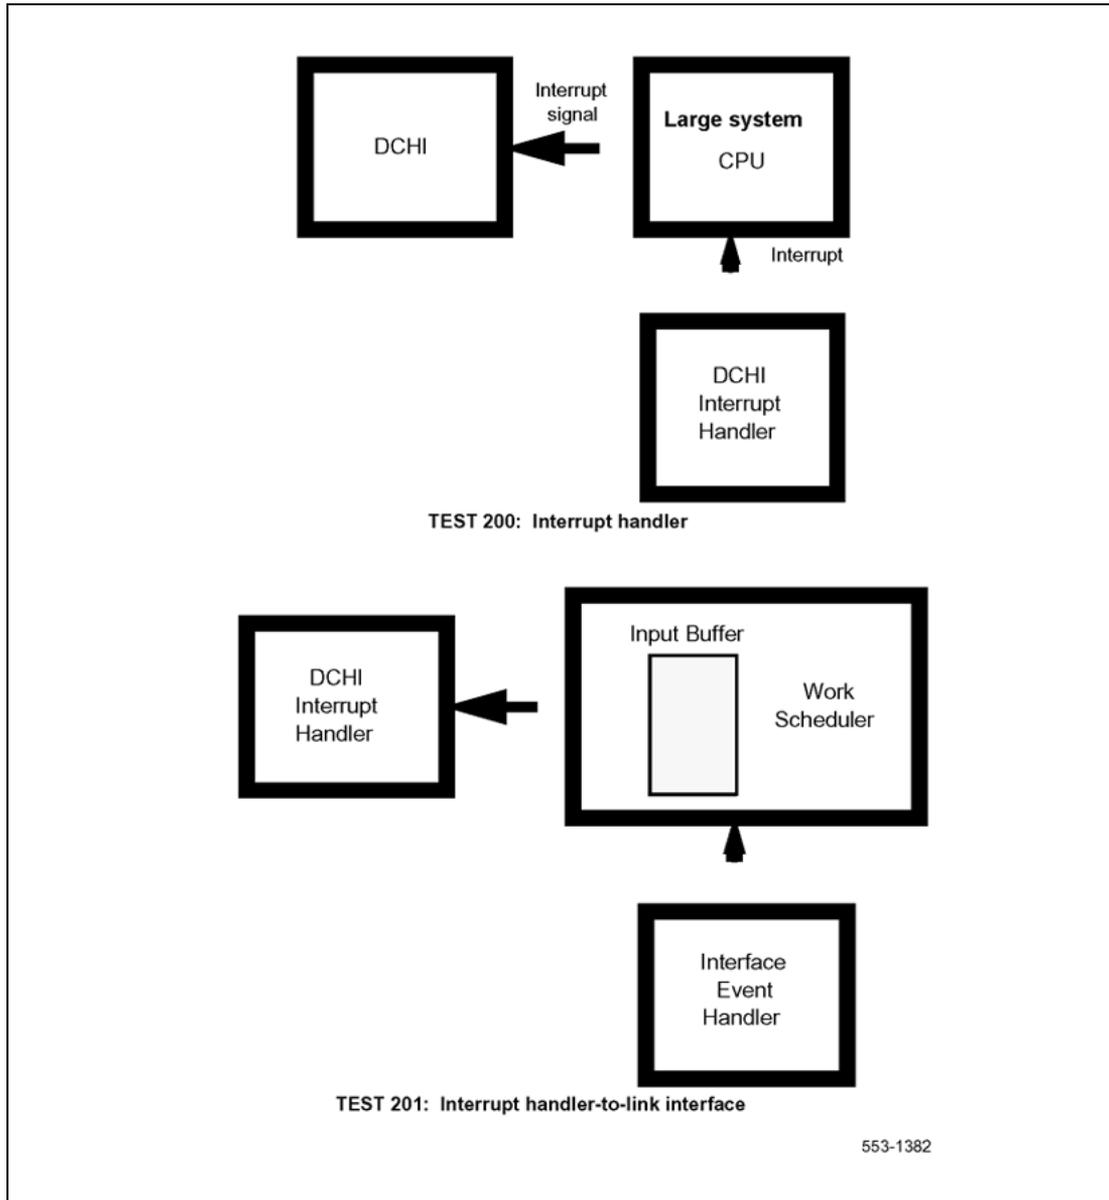

## DCH traffic (LD 2)

Traffic report TFS009 provides accumulated D-channel statistics. This report can be included in the scheduled traffic report, or printed on demand as described below.

To enable D-channel measurement in the scheduled traffic reports, use the Set System Traffic Options (SOPS) command. For example, to enable option 9 for D-channel use:

LD 2

SOPS 9

To print current D-channel measurement use the Invoke System Traffic (INVS) command. For example, to enable option 9 for D-channel use:

LD 2

INVS 9

### TFS009 D-channel

TFS009 reports traffic activity for D-channels. Eight fields report activity on the Multi-purpose Serial Data Link (MSDL) D-channel. Nine fields report activity associated with the QSIG Path Replacement feature. See [Table 15 "TFS009 D-channel report format" \(page 67\)](#) for TFS009 D-channel report format and [Table 16 "Legend for TFS0009 report" \(page 68\)](#) for report legend.

**Table 15**  
**TFS009 D-channel report format**

System ID DCH x	TFS009	
aaaa		nnnn
bbbb		oooo
cccc		pppp
dddd		qqqq
eeee		rrrr
ffff		ssss
gggg		
hhhh		tttt
iiii		
jjjj		uuuu
yyyy		
kkkk (MSDL only)		vvvv (MSDL only)
llll (MSDL only)		wwww (MSDL only)
mmmm (MSDL only)		xxxx (MSDL only)
tat1 (MSDL only)		tat2 (MSDL only)
DIV_NB	DIV_NEW	DIV_OLD
CNG_NB	CNG_NEW	CNG_OLD
CON_NB	CON_NEW	CON_OLD
FLOW	FLOWa	FLOWb
		FLOWc
		FLOWd

**Table 16**  
**Legend for TFS0009 report**

SYSTEM	
aaaa	number of all incoming messages received on the D-channel
bbbb	number of all incoming call processing messages received on the D-channel
cccc	number of all incoming management messages received on the D-channel
dddd	number of all incoming maintenance messages received on the D-channel
eeee	average number of incoming bytes per message
ffff	accumulated real time a D-channel was busy transferring incoming messages in half-millisecond units (Divide the reported number by 2 for a result in milliseconds. For example: divide a reported number of 200 by 2 for a result of 100 milliseconds.)
gggg	running average of the number of requests queued in request output message buffer
hhhh	number of times when no request output message buffer was available
iiii	number of PRA layer-3 protocol errors since the last traffic report
jjjj	number of times the D-channel was down
yyyy	number of established call-independent connections
kkkk	average incoming link usage (given as a percentage of the link capacity)
llll	average outgoing link usage (given as a percentage of the link capacity)
mmmm	number of connected calls
tat1	total number of anti-tromboning operations attempted since the D-channel traffic was last cleared
	number of optimization requests with the diversion trigger
nnnn	number of all outgoing messages sent on the D-channel
oooo	number of all outgoing call processing messages sent on the D-channel
pppp	number of all outgoing management messages sent on the D-channel
qqqq	number of all outgoing maintenance messages sent on the D-channel
rrrr	average number of outgoing bytes per message
ssss	accumulated real time a D-channel was busy transferring outgoing messages in half-millisecond units (Divide the reported number by 2 for a result in milliseconds. For example: divide a reported number of 200 by 2 for a result of 100 milliseconds.)
tttt	number of times a message with no End of Message (EOM) mark was received

uuuu	accumulated real time the D-channel was down since the last report in units of 2 seconds. For example, if the value is 10, the down time is 20 seconds.
vvvv	peak incoming link usage (given as a percentage of the link capacity) over a 5-second period
wwww	peak outgoing link usage (given as a percentage of the link capacity) over a 5-second period
xxxx	time (in seconds) since the MSDL D-channel traffic was last cleared
tat2	total number of successful anti-tromboning operations since the D-channel traffic was last cleared
CNG_NB	number of optimization requests with the congestion trigger
CNG_NEW	number of optimization successful with the congestion trigger: a new path is used
CNG_OLD	number of optimization successful with the congestion trigger but the old path has been retained
CON_NB	number of optimization requests with the connected trigger
CON_NEW	number of optimization successful with the connected number trigger: a new path is used
CON_OLD	number of optimization successful with the connected number trigger but the old path has been retained
DIV_NB	number of optimization requests with the diversion trigger
DIV_NEW	number of optimization successful with the diversion trigger: a new path is used
DIV_OLD	number of optimization successful with the diversion trigger but the old path has been retained
FLOW	To prevent any application from tying up buffer resources due to its abnormal conditions or misbehavior, a flow control mechanism is defined in the system and at the card level. This flow control mechanism applies only to the normal interface (receive and transmit ring buffers, not the expedited interface).
FLOWa	This flow control mechanism is based on a common "window" mechanism. The basic concept is that the number of outstanding messages that are associated with a Socket ID in the transmit or receive ring cannot exceed a predefined number, "application threshold". Note that the mechanism is based on the number of messages per application rather than the number of buffers per application.
FLOWb	first flow control hit starts a 128ms timer to allow one more try second flow control hit requests the sending of OK_TO_SEDN_REQ message via a logged SSD message to MSDL loadware. Start the 128ms timer

FLOWc	third flow control hit asks the data socket to be resynchronized by MSDL loadware. Start the 128ms timer
FLOWd	fourth flow control hit starts a 128ms timer such that the link is forced to disable after time out

### MSDL local loopback test (NT6D80)

Before beginning this test, the D-channel must be in test state:

**ENL TEST x**, where **x** is the logical DCH number.

To start the local loopback test on the Multi-purpose Serial Data Link (MSDL) card, use the **ENL LLB x** command, where **x** is the logical DCH number.

Then perform the following test:

**TEST LLB x**

The test checks both MSDL expedited and normal (ring) interfaces.

The response for the expedited interface that carries urgent signaling and maintenance messages between the system CPU and the MSDL MPU follows:

**DCH : X XDU TEST CONFIRM TIME : <time of day>**

**TEST : PASS (or FAIL)**

**X** is the DCH logical number

**XDU** is the expedient message sent around the loop.

The response for the ring interface that transmits operation data between the system CPU and the MSDL MPU follows:

**DCH : X DU TEST CONFIRM TIME : <time of day>**

**TEST : PASS (or FAIL)**

1. If the test fails, check the status of the MSDL card, used by this DCH link, with the **STAT MSDL y FULL** command, where **y** is the physical port (DNUM) of the MSDL card.
2. If the MSDL card may be faulty, disable the card and perform a reset self-test.

**DIS MSDL y**

**RST MSDL y**

**SLFT MSDL x**


3. If the card passed the test, the problem may lie in incompatible software.

After completing the test, remove the D-channel from the test state:

**DIS TEST x.**

Refer to *Circuit Card Reference (NN43001-311)*. See "Local loopback test (NT6D80)" (page 71).

### Local loopback test (NT6D80)

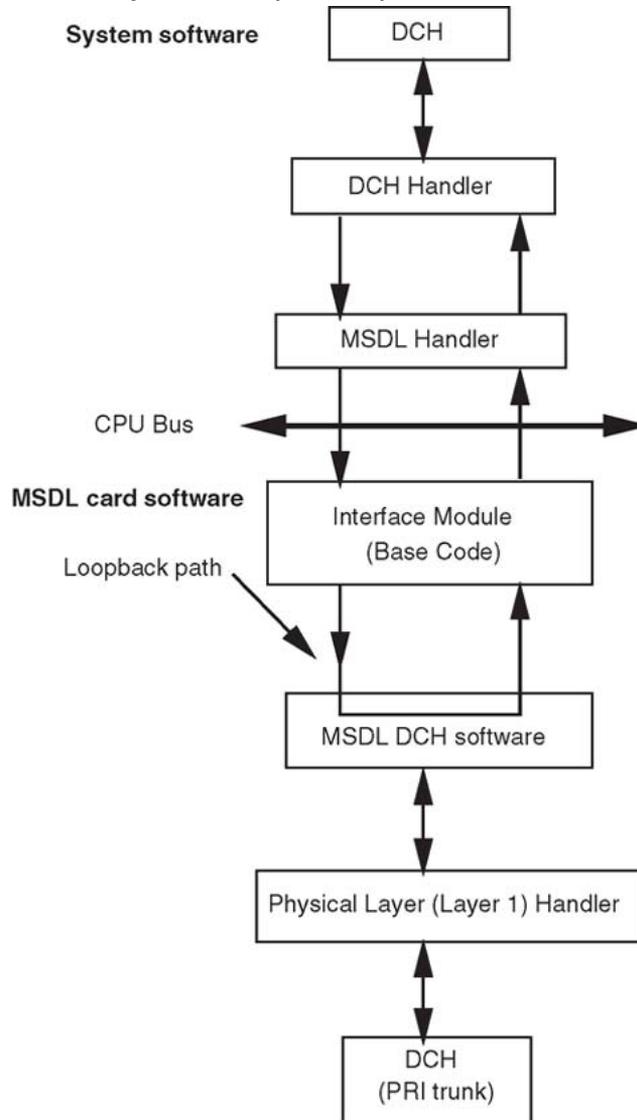

553-5436

### MSDL remote loopback tests (NT6D80)

Before beginning this test, verify the following:

- D-channels on both switches are configured on MSDL cards
- DCH links on both switches are set to TEST mode
- DCH at Switch B is in remote loopback mode (RLB)

- remote capability (RCAP) is MSDL

**Procedure 10****Performing remote loopback tests****Step Action**

- 1 Place DCH links on both systems in TEST mode. Enter **ENL TEST x** on Switch A and **ENL TEST y** on Switch B for the same DCH link. The DCH links on both switches are automatically placed in idle state (IDLE).
- 2 Place the Switch B DCH link in remote loopback state (RLB) with **ENL RLB DCH x**. The DCH link in Switch A must stay in idle.
- 3 From Switch A, perform the loopback test with **TEST RLB DCH x**.  
The result of the remote loopback test is displayed on Switch A's console in the following format:  
  
**DCH : X RLB TEST CONFIRM TIME : <time of day>**  
**TEST : PASS**  
**TEST : FAIL - NO DATA RCV FAR END**  
**TEST : FAIL - CORPT DATA RCV FAR END**  
**TEST : FAIL - REASON UNKNOWN**  
  
**TEST : FAIL** may indicate a problem in the physical link between the two switches, or faulty equipment in either switch. Check the connections, and verify the status of the MSDL and PRI trunk cards used for this link.
- 4 Place the Switch B DCH link back to the idle state, with the **DIS RLB y** command.
- 5 If you think the MSDL card used in either switch has failed, check the status of the DCH link and the status of the MSDL card by entering **STAT MSDL x FULL**.
- 6 If the MSDL card is faulty, disable the card and perform a self-test:  
  
**DIS MSDL x**  
**SLFT MSDL x**
- 7 If the card passed the test, the problem may lie in incompatible software. Refer to *Circuit Card Reference (NN43001-311)*.
- 8 After the test is complete, remove both sides from the test state:  
  
**DIS TEST x**  
**DIS TEST y**


---

—End—

---

See Figure 11 "Remote loopback tests (NT6D80)" (page 73).

**Figure 11**  
Remote loopback tests (NT6D80)

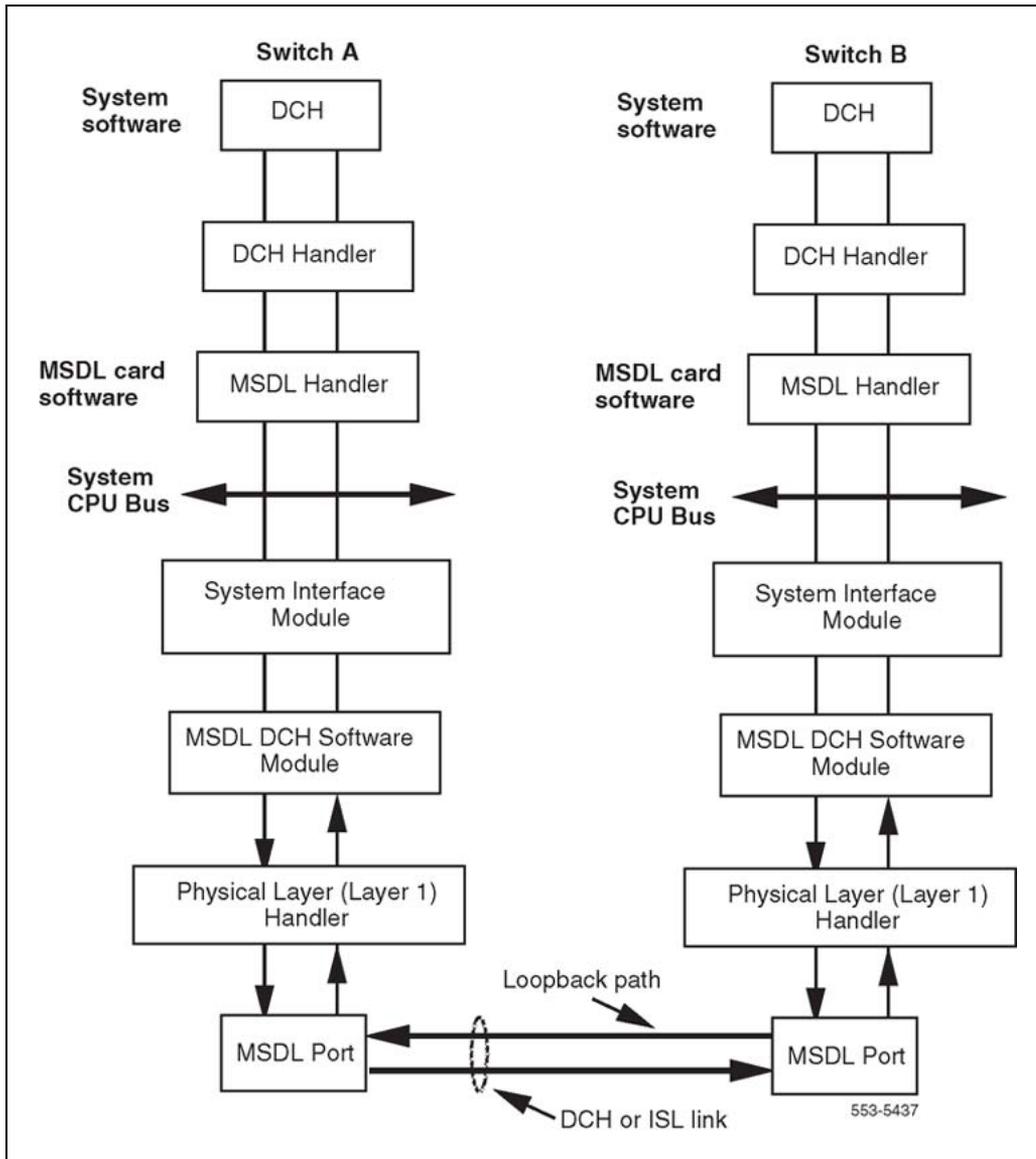

### Protocol log (PLOG)

The count of D-channel errors is stored in the Protocol Log (PLOG). The PLOG is printed by using LD 96 as shown in the PLOG status check below.

Protocol errors can be the result of:

- PRI transmission problems and re-start procedures, or
- a protocol mismatch with the far end

The PLOG counters are cleared after:

- the PLOG is printed, or
- the DCHI card is enabled

**Note:** When a protocol counter overflows, the PLOG is printed automatically and the counters are cleared.

When the PLOG has non-zero counters, check the PRI status and alarms as shown in [Procedure 11 "Checking the PLOG status" \(page 74\)](#). See [Table 17 "Protocol log" \(page 75\)](#) for the PLOG.

#### **Procedure 11** **Checking the PLOG status**

---

<b>Step</b>	<b>Action</b>
-------------	---------------

---

- |          |                                                                                                                                                                                                    |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1</b> | Check the contents of the PLOG using the following:<br><br>LD 96<br>PLOG DCH x<br><br>Response:<br>DCH : XX MAINT CONFIRM TIME: <time of day><br>COUNTERVALUE<br>1: 12<br>12: 8<br>20: 15<br>N: XX |
| <b>2</b> | If there are PRI bit rate or frame errors, assume there is a PRI problem.                                                                                                                          |
| <b>3</b> | If there is no problem with the PRI but there are a large number of protocol errors, report a protocol problem.                                                                                    |
- 

—End—

---

**Table 17**  
**Protocol log**

<b>Format</b>	
DCH : XX MAINT CONFIRM TIME: <time of day>	
COUNTERVALUE	
<b>Protocol counters</b>	
1	count of missing PRI handshakes
2	count of peer-initiated re-establishment link
3	count of unsuccessful retransmit N200 of SABME
4	count of unsuccessful retransmit N200 of DISC
5	count of N(R) errors
6	count of information fields with length greater than N201
7	count of undefined frames
8	count of information fields that are not allowed to contain information
9	count of FRMR frames received from the far end
10	count of CRC error frames received from the far end
11	count of REJ frames received from the far end
12	count of layer 3 messages with less than 4 octets
13	dummy counter, always zero
14	count of undefined layer 3 message types
15	count of layer 3 messages missing one or more mandatory information elements
16	count of layer 3 messages missing one or more undefined information elements
17	count of layer 1 reports of no external clock being received
18	count of aborted frames
19	count of SABME frames received with incorrect C/R bit
20	count of supervisory frames received with F = 1
21	count of unsolicited DM responses with F = 1
22	count of unsolicited UA responses with F = 1
23	count of unsolicited UA responses with F = 0
24	count of DM responses with F = 0
25	count of times that no response was received from the far end after N200 transmissions retransmissions of RR or RNR
26	count of frames received with incorrect header length
27	number of times owner receiver busy condition was entered
28	number of times peer receiver busy condition was entered

29	count of messages with call reference length greater than 2
30	count of optional IEs received with invalid contents
31	count of mandatory IEs received with invalid contents
32	count of messages received with IEs not ordered correctly
33	count of IEs which were repeated in received messages, but are only allowed to appear once per message
34	count of IEs received with length exceeding the specified maximum length for the IE
35	count of layer 3 messages from far end with invalid call reference flag value of 0
36	count of layer 3 messages from far end with invalid call reference flag value of 1
37	count of layer 3 messages from far end with invalid global call reference
38	count of layer 3 messages from system that are too short
39	count of layer 3 messages from system containing an undefined message type
40	count of layer 3 messages from system missing mandatory IE(s)
41	count of layer 3 messages from system containing unsupported IE(s)
42	count of layer 3 messages from system containing invalid operational IE(s)
43	count of layer 3 messages from system containing invalid mandatory IE(s)
44	count of layer 3 messages from system with IE(s) out of order
45	count of layer 3 messages from system containing repeated IE(s)
46	count of layer 3 messages from far end with an invalid call reference length
47	count of layer 3 messages from system with an invalid call reference flag value of 0
48	count of layer 3 messages from system with an invalid call reference flag value of 1
49	count of layer 3 messages from system with an invalid global call reference
50	count of unexpected layer 3 messages received from the far end
51	count of unexpected layer 3 messages received from the system
52	count of unexpected layer 3 timer expirations
53	count of protocol messages received when D-channel is not in service or waiting for a Service Acknowledge message

## Replace the DCHI



### CAUTION

Firmly touch the metal frame of the cabinet to discharge static electricity from your body before handling circuit packs.

**Procedure 12**  
**Replacing the DCHI**

---

**Step Action**

---

- 1 Disable the D-channel using:  
LD 96  
DIS DCH N
  - 2 Disable the asynchronous port on the DCHI card (if equipped) using:  
LD 48  
DIS ESDI N
  - 3 Set the ENB/DIS switch to DIS.
  - 4 Disconnect cables on DCHI faceplate.
  - 5 Remove the DCHI from the shelf.
  - 6 Make sure that the new DCHI card switch settings are the same as the faulty DCHI card. See *ISDN Primary Rate Interface Installation and Commissioning (NN43001-301)* and *Circuit Card Reference (NN43001-311)* for switch-setting information.
  - 7 Install the new DCHI card in the appropriate slot.
  - 8 Connect the faceplate cables to the new DCHI card.
  - 9 Set the ENB/DIS switch to ENB.
  - 10 Enable the D-channel using:  
LD 96  
ENL DCH N
- 

—End—

---

**LD 60 - Loop Maintenance for SYS-12, AXE-10, SWE, SWISSNET, NUMERIS, EuroISDN, NEAX-61, Asia-Pacific**

If there is a loop configured with a SYS-12, AXE-10, SWE, SWISSNET, NUMERIS, EuroISDN, NEAX-61, or Asia-Pacific D-channel, LD 60 adds the D-channel type to the printout displayed upon entering the overlay. This printout alerts the technician to the relationship of the difference of the timeslot-to-channel mapping between the system and the D-channel type. See [Table 18 "Meridian 1SYS- 12, AXE- 10 SWE, NUMERIS, SWISSNET, EuroISDN, NEAX-61 channel timeslot mapping" \(page 78\)](#)

**Table 18**  
**Meridian 1SYS- 12, AXE- 10 SWE, NUMERIS, SWISSNET, EuroISDN, NEAX-61 channel timeslot mapping**

Channel	Meridian 1	Network	Timeslot
B-channel	1-15 16-30	1-15 17-31	1-15 17-31
D-channel	31	16	16

---

# Clock controller maintenance

---

## Contents

This section contains information on the following topics:

- "Clock operation" (page 79)
  - "Tracking mode" (page 79)
  - "Free run (non-tracking) mode" (page 80)
  - "Reference clock errors" (page 80)
  - "Automatic clock recovery" (page 81)
  - "Automatic clock switching" (page 81)
- "Clock controller commands (LD 60)" (page 81)
- "Replace the clock controller" (page 82)
  - "Task summary list" (page 82)
  - "Set switches" (page 84)
- "Clock controller cabling" (page 85)


## Clock operation

### Tracking mode

In tracking mode, the PRI loop supplies an external clock reference to a clock controller (CC). See "[Clock controller primary and secondary tracking](#)" (page 80). Two PRI loops can operate in tracking mode, with one defined as the primary reference source for clock synchronization, the other defined as the secondary reference source. The secondary reference acts as a backup to the primary reference.

As shown in "[Clock controller primary and secondary tracking](#)" (page 80), a system with a dual CPU can have two clock controllers (CC0 and CC1). One clock controller acts as a backup to the other. The clock controllers should be locked to the reference clock.

### Clock controller primary and secondary tracking

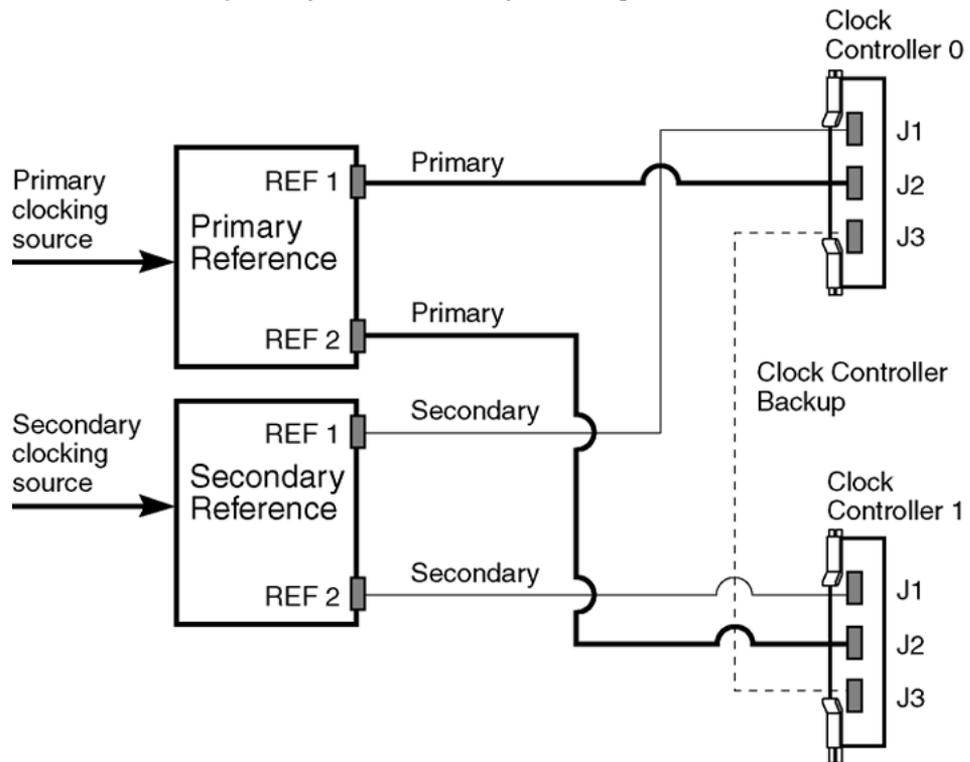

553-7401

### Free run (non-tracking) mode

The clock synchronization for a PRI loop can operate in free-run mode if

- the loop is not defined as the primary or secondary clock reference
- the primary and secondary references are disabled
- the primary and secondary references are in local alarm

### Reference clock errors

System software checks every 0-15 minutes (programmable) to see if a clock-controller or reference-clock error has occurred.

In tracking mode, at any one time, there is one active clock controller which is tracking on one reference clock. If a clock-controller error is detected, the system switches to the backup clock controller, without affecting which reference clock is being tracked.

A reference-clock error occurs when there is a problem with the clock driver or with the reference system clock at the far end. If the clock controller detects a reference-clock error, the reference clocks are switched.

### Automatic clock recovery

An option for automatic clock recovery can be selected in LD 60 with the command EREF.

A PRI loop is disabled when it enters a local alarm condition. If the local alarm is cleared, the loop is enabled automatically. When the loop is enabled, clock tracking is restored in the following conditions:

1. If the loop is assigned as the primary reference clock but the clock controller is tracking on the secondary reference or in free run mode, it is restored to tracking on primary.
2. If the loop is assigned as the secondary reference clock but the clock controller is in free run mode, it is restored to tracking on secondary.

If the 15-minute clock check indicates the system is in free-run mode:

1. Tracking is restored to the primary reference clock, if defined.
2. If the primary reference is disabled or in local alarm, tracking is restored to the secondary reference clock, if defined.

**Note:** If the system was put into free-run mode intentionally by the craftsperson, it resumes tracking on a reference clock at this time. This occurs unless the clock-switching option has been disabled (LD 60, command MREF), or the reference clock has been "undefined" in the database.

### Automatic clock switching

If the EREF option is selected in LD 60, tracking on the primary or secondary reference clock is automatically switched in the following manner:

1. If software is unable to track on the assigned primary reference clock, it switches to the secondary reference clock and sends appropriate DTC maintenance messages.
2. If software is unable to track on the assigned secondary reference clock, it switches to free-run mode.

See [Table 19 "Clock controller commands in LD 60" \(page 81\)](#) for clock controller commands in LD 60.

## Clock controller commands (LD 60)

**Table 19**  
Clock controller commands in LD 60

Command	Description
DIS CC x	Disable specified system clock controller x (0 or 1).
DSCK L	Disables the clock for loop L.

Command	Description
DSYL L	Disables remote alarm processing for loop L.
ENL CC x	Enable specified system clock controller x (0 or 1).
ENYL L	Enables remote alarm processing for loop L.
EREF	Enables automatic switching and recovery of primary and secondary reference clocks when loops associated with these clocks are automatically enabled.
MREF	Disables automatic switching and recovery of the primary and secondary reference clocks when loops associated with these clocks are automatically disabled or in local alarm.
SSCK x	Provides status of system clock x (0 or 1). Indicates the active controller as well as active primary or secondary reference-clock source or free run.
SWCK	Switches the system clock from the active to the standby clock. The reference-clock source remains unchanged.
TRCK xxx	Set clock-controller tracking where xxx represents one of the following mnemonics:  <b>PCK</b> track primary clock  <b>SCLK</b> track secondary clock  <b>FRUN</b> free-run mode

## Replace the clock controller

### Task summary list

The following is a summary of the tasks in this section:

1. Replace the clock controller. Refer to [Procedure 13 "Replacing the clock controller"](#) (page 83).



#### CAUTION

Firmly touch the metal frame of the cabinet to discharge static electricity from your body before handling circuit packs.



#### CAUTION

Do not deviate from this procedure. Deviation will not cause the system to SYSLOAD or initialize, but will stop call processing.

**Procedure 13**  
**Replacing the clock controller**

---

<b>Step</b>	<b>Action</b>
1	Make sure that the clock controller card being replaced is associated with an inactive CPU. Switch, if necessary, using: LD 35 SCPU
2	Disable the clock controller card being replaced using: LD 60 DIS CC x
3	On the clock controller card being replaced, set the ENB/DIS switch to DIS.
4	Disconnect cables from clock-controller card being replaced.
5	Remove card from shelf.
6	Set the ENB/DIS switch to DIS on the clock-controller card being added.
7	Make sure that the switch settings are correct.
8	Install new clock-controller card in same slot as the defective card.
9	Reconnect cable(s) to clock-controller faceplate.
10	Set ENB/DIS switch on new clock controller to ENB.
11	Enable new clock-controller card using: LD 60 ENL CC x
12	Verify normal service level; first, switch the active clock to standby using: LD 60 SWCK x  If an error message results, refer to <i>Communication Server 1000M and Meridian 1 Large System Maintenance (NN43021-700)</i> for the interpretation.  <b>Note:</b> Switching clock controllers using LD 60 will generate ERR20 messages.

These can usually be ignored, but avoid excessive switching, especially when counters are near the maintenance or out-of-service thresholds. Excessive switching can generate maintenance or out-of-service threshold messages, or cause the PRI to be disabled.

Check the counters in LD 60. If necessary, reset the counters using the RCNT command.

---

—End—

---

### Set switches

Before installing a clock controller, set the switches as shown in [Table 20 "Clock controller switch settings for QPC471 vintage H" \(page 84\)](#) and [Table 21 "Clock controller switch settings for QPC775" \(page 84\)](#). [Table 20 "Clock controller switch settings for QPC471 vintage H" \(page 84\)](#) displays the settings for different vintages of the QPC471. [Table 21 "Clock controller switch settings for QPC775" \(page 84\)](#) shows the settings for the QPC775.

**Table 20**  
**Clock controller switch settings for QPC471 vintage H**

System		SW1				SW2				SW4			
51C, 61C		on	on	on	on	off	off	off	off	off	on	*	*
Cable length between the J3 faceplate connectors:													
0-4.3 m	(0-14 ft.)									off		off	
4.6-6.1m	(15-50 ft.)									off		on	
6.4-10.1m	(21-33 ft.)									on		off	
10.4-15.2 m	(34-50 ft.)									on		on	
<ul style="list-style-type: none"> <li>• If there is only one clock controller card in the system, set to OFF. If there are two clock controller cards, set to match the cable length between the J3 faceplate connectors. Determine the total cable length (no single cable can exceed 25 ft.) between the J3 connectors. Both cards must have the same setting.</li> </ul>													


**Table 21**  
**Clock controller switch settings for QPC775**

System	SW2	SW3	SW4
51C, 61C	ON	OFF	ON
81C	OFF	OFF	ON


## Clock controller cabling

The clock-controller cabling for system configurations is shown in Figures 15 to 17, beginning on page 105.


**Figure 12**  
**Clock controller cabling: Half Group systems**

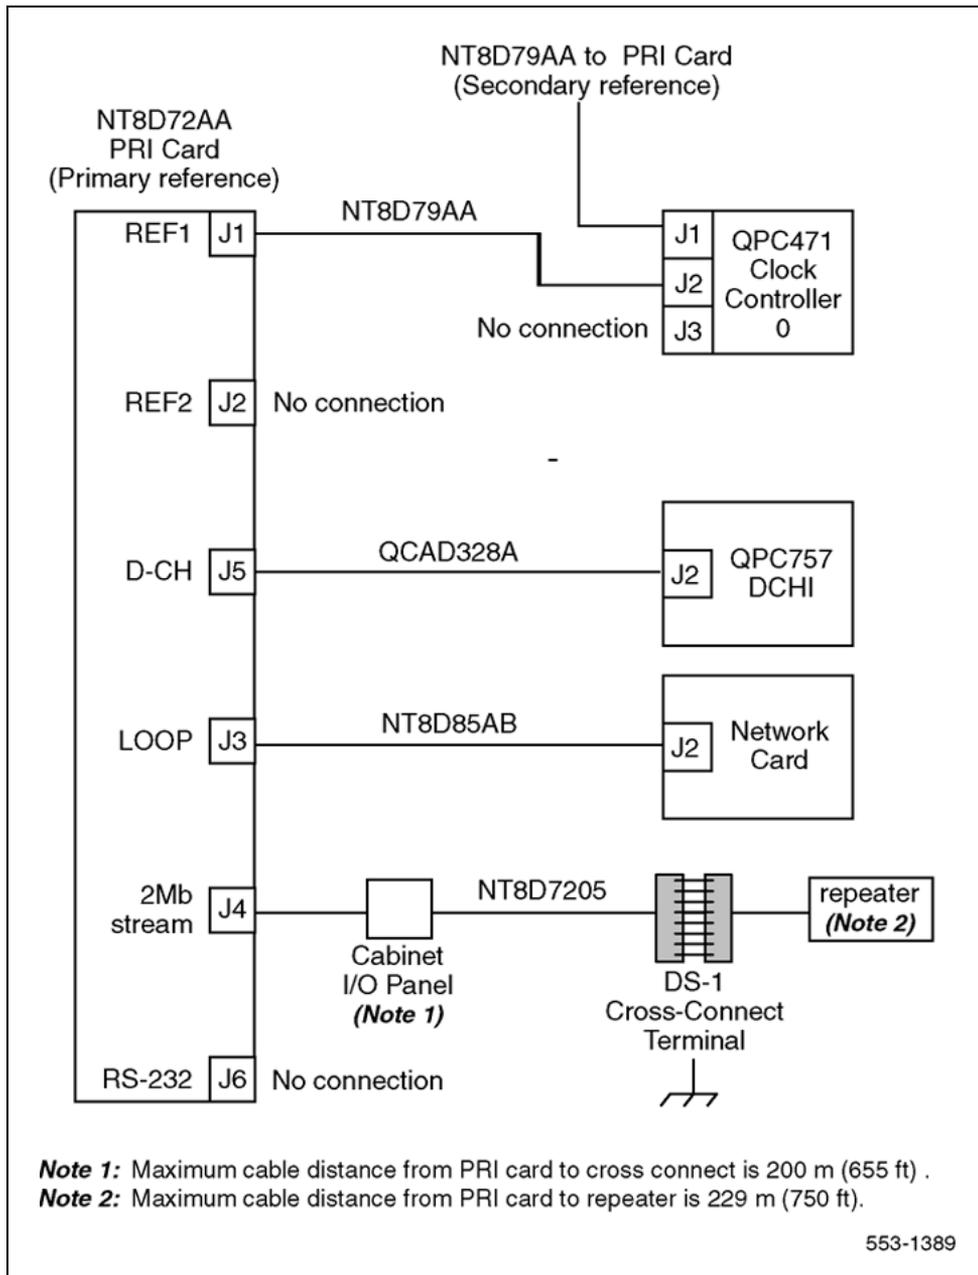

**Figure 13**  
**Clock controller cabling: Single Group systems**

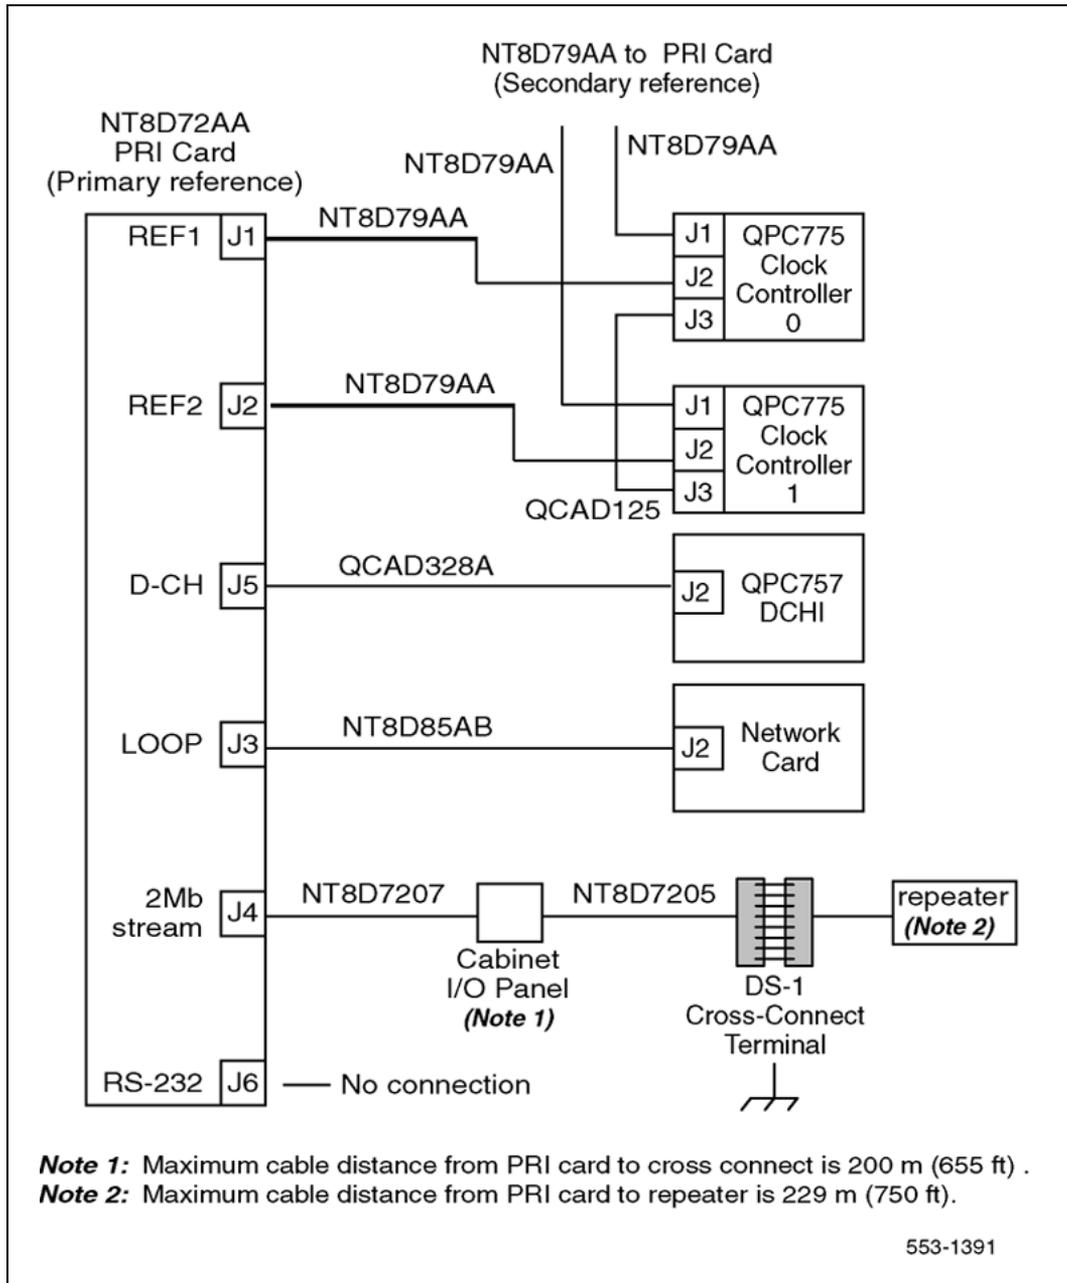

**Figure 14**  
**Clock controller cabling**  
**Multi Group systems**

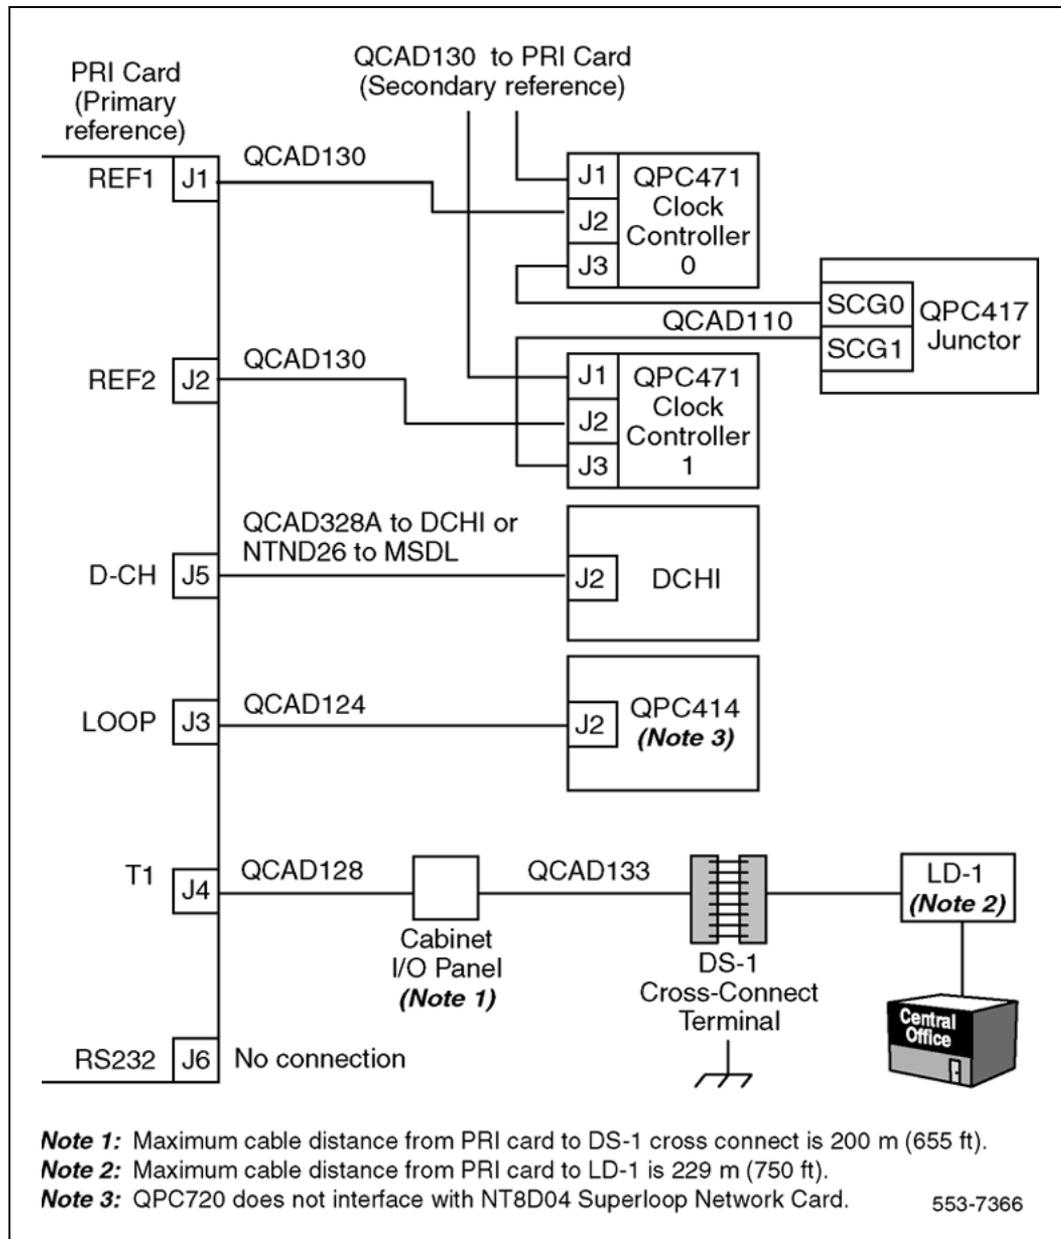



---

# ISDN Signaling Link maintenance

---

## Contents

This section contains information on the following topics:

- "ISL status formats" (page 89)
  - "Print programs (LD 20, 21, 22)" (page 90)
- "ISL startup" (page 91)
  - "Dedicated D-channel using DTI or PRI" (page 91)
- "ISL recovery" (page 91)

## ISL status formats

If a trunk unit is controlled by the ISL feature, the STAT commands in LD 32 and LD 36 will do the following:

- indicate the trunk is an ISL trunk, and
- display the status of the D-channel

The display format is the same for both programs. See [Table 22 "ISL status check in LD 32 and 36"](#) (page 89).

**Table 22**  
**ISL status check in LD 32 and 36**

Command	Response
STAT L S C	UNIT 00 = IDLE ISL TRK D-CH <ch #> <status> UNIT 01 = IDLE ISL TRK D-CH <ch #> <status>
STAT L S C U	IDLE ISL TRK D-CH <ch #> <status>

When a trunk unit is controlled by ISL, the STAT L command in LD 60 indicates the trunk is an ISL trunk. The STAT L CH command indicates the trunk is an ISL trunk and displays the status of the D-channel. The display format is shown in [Table 23 "ISL status check in LD 60" \(page 90\)](#).

**Table 23**  
**ISL status check in LD 60**

Command	Response
STAT L	CH 1 = IDLE ISL TIE CH 2 = UNEQUIP
STAT L CH	CH 1 = IDLE ISL TIE?D-ch <ch #> <status>

### Print programs (LD 20, 21, 22)

Print programs LD 20, LD 21, and LD 22 (see [Table 24 "ISL prompts in LD 20, LD 21, and LD 22" \(page 90\)](#)) provide the following ISL information:

- LD 20 prints trunk information
- LD 21 prints route information
- LD 22 prints configuration record information

**Table 24**  
**ISL prompts in LD 20, LD 21, and LD 22**

Program	Prompt	Description
LD 20	CHID nn	Channel ID
LD 21	MODE ISL/PRI DCHI x	ISL or PRI service route DCHI port number (printed if MODE = ISL)
LD 22	USR PRI/ISL/SHA  ISLM x	D-channel for PRI only, ISL D-channel for (dedicated mode), or SHA= D-channel shared between PRI and ISL  maximum number of ISL trunks

LD 21 also lists the ISL trunk terminal numbers (TNs) configured in the system and counts the number of ISL trunks controlled by the DCH (see [Table 25 "Additional ISL information provided in LD 21" \(page 91\)](#)). To list ISL trunk TNs, use the following prompts:

```
REQPRT
TYPEISLL
```

**Table 25**  
**Additional ISL information provided in LD 21**

Cust #	ISL Trunk TN	Channel ID	DCH #	Route #
XX	I s c u	xxx	xx	xxx
XX	I s c u	xxx	xx	xxx

## ISL startup

In general, the procedures for bringing up the D-channel are the same as the ISDN PRI interface (see the PRI startup section). However, some additional procedures are required when ISL is configured in the dedicated mode using DTI or PRI trunks.

### Dedicated D-channel using DTI or PRI

When the D-channel is configured in the dedicated mode using a DTI or PRI trunk, an Asynchronous Data Module (ADM), an Asynchronous/Synchronous Interface Module (ASIM), or a High Speed Data Module (HSDM) is required between the DCHI or MSDL cards and the Data Line Card (DLC).

**Note:** The configuration with a DTI or PRI meets Radio Frequency Interference (RFI) requirements. The RFI filter connectors are attached to the QCAD42A cable. To install the RFI filters, see the instructions for installing the EMI filters in the system installation documents.

The following signaling sequence is required between the DCHI or MSDL cards and the ADM, HSDM, or ASIM to establish the D-channel:

1. The ADM, ASIM, or HSDM is already powered up.
2. The ADM, ASIM, or HSDM raises clear to send (CTS) and data set ready (DSR) signals to the DCHI or MSDL.
3. The DCHI or MSDL raises the data terminal ready (DTR) signal to the ADM, ASIM, or HSDM.
4. The ADM, ASIM, or HSDM makes the hotline call (the programmed auto-dial DN) to the far-end switch using a DTI or PRI trunk line, depending on the DN configured.
5. The call is established and the CONNECT lamp on the ADM, ASIM, or HSDM is lit.
6. The D-channel is established.

## ISL recovery

The D-channel goes down if the following occurs:

- the modem, ADM, ASIM, or HSDM power is off

- the hotline call between the system and the modem, ADM, ASIM, or HSDM is dropped

The system handles these possibilities in the following way:

1. The system CPU schedules a data link diagnostics program, which runs in background mode.
2. If this program finds that the link is not established, it requests the maintenance program to reestablish the data link by reinitializing the hotline connection.
3. The hotline call is brought up as it is during installation.

The ASIM can automatically reinitiate the hotline call with the Forced DTR option set to ON.

A modem with auto-dial capability is required to automatically bring up the D-channel in the configuration below.

**Note:** The Radio Frequency Interference (RFI) filter connectors are attached to the QCAD42 cable. To install the RFI filters, see the instructions for installing the EMI filters in the system installation documents.

---

# 1.5 Mb DTI/PRI maintenance

---

## Contents

This section contains information on the following topics:

"Overview" (page 93)

"Monitor DTI/PRI operation" (page 93)

"DTI/PRI maintenance tools" (page 97)

## Overview

From a maintenance perspective, DTI/PRI operation consists of these major elements:

- hardware and software states
- near-end and far-end status
- link and/or span integrity
- clocking status
- frame alignment

PRI operation is monitored and reported on through maintenance messages, out-of-service alarms, and circuit card faceplate LEDs. Bantam monitor jacks are located on the faceplate of the NTAK09.

System maintenance provides several tools, either manual or automatic, for maintaining effective PRI operation. These tools are service change and maintenance commands that are accessible through the software overlays and resident diagnostic routines.

## Monitor DTI/PRI operation

### Maintenance messages

The following sections describe the maintenance messages that may appear on the system maintenance TTY as a result of DTI or PRI operation.

D-channel status and error conditions are reported as DCH messages. PRI status and error conditions are shown in [Table 26 "Maintenance messages" \(page 94\)](#). Additional information on PRI and DCH messages can be found in the *Software Input Output Reference - System Messages (NN43001-712)*.

**Table 26**  
**Maintenance messages**

Message	Meaning
DTA	Digital Trunk Alarms (Resident Monitor)
DTC	Resident CC Monitor
DTI	Digital Trunk Interface and CC (LD60)
PRI	Primary Rate Interface

### Message descriptions

Maintenance messages provide near-end and far-end switch status. Both service and service acknowledge messages are supported on PRI B-channels and ISL channels.

Service and service acknowledge messages for B-channels and ISL channels are supported between:

- System to system: ISL and PRI
- System to DMS-100: PRI only
- System to DMS-250: PRI only
- System to AT&T ESS4 and ESS5: PRI only

The status reported by the service and service acknowledge messages for B-channels and ISL channels are:

- in-service
- maintenance
- out-of-service

Near-end and far-end sub-categories are defined for each maintenance status. See [Table 27 "Maintenance message and status combinations" \(page 95\)](#) for possible combinations of near-end and far-end statuses, and the channel capability for each status. When the near-end and far-end status does not match, the more severe maintenance status takes effect over the less severe maintenance status.

**Table 27**  
**Maintenance message and status combinations**

Near-end status	Far-end status	B or ISL channel capability
In-service	In-service	Incoming and outgoing call allowed
In-service	Maintenance	Incoming calls allowed only
In-service	Out-of-service	Not allowed to use
Maintenance	N/A	Not allowed to use
Out-of-service	N/A	Not allowed to use

**Note:** Enabling/Disabling of Service Messages must be coordinated between the two ends. Enabling Service Messages at one end and not the other results in B-channels being placed out-of-service.

### Message functions

Service messages are used to monitor the following:

- D-channel establishment
- D-channel sanity polling
- B-channel or ISL channel status change
- Channel status audit

**D-channel establishment** When the D-channel establishes, the B-channel status is supported by sending service messages for each B-channel controlled by a D-channel. This messaging allows the far end to synchronize its channel states. The service messages are sent when the system brings up the D-channel automatically or an administrator brings up the D-channel manually by using LD 96.

**D-channel sanity polling** If a D-channel has been idle for 30 seconds, a service message is sent to poll the sanity of the link. The service message is sent regardless of whether the near end is configured as master or slave.

**B-channel or ISL channel status change** Whenever there is a status change for a B-channel or an ISL channel, the new status is reported to the far end through a service message. Status change can occur through service change or maintenance operations, such as the addition or deletion of a channel in LD 14, or disabling of the associated loop, shelf, card or unit in LD 30, LD 32, LD 36, LD 41, or LD 60.

**Channel status audit** LD 30 is enhanced to allow channel status audit to be initiated. The channels associated with each D-channel are examined and their status is reported to the far end through service messages.

**Activating service messages** Activate the service messages in LD 96 on a per D-channel basis. The backup D-channel (if equipped) automatically operates in the same mode as the primary D-channel. The commands are listed in [Table 28 "D-channel messages" \(page 96\)](#).

**Table 28**  
**D-channel messages**

Command	Description
ENL SERV N	Turns on the support of service and service acknowledge messages for DCH link N.
DIS SERV N	Turns off the support of service and service acknowledge messages for DCH link N.
STAT SERV (N)	Displays the current service and service acknowledge message SERV setting for individual DCH N or DCH.

**Note:** D-channels on each side of the link must be disabled to enable service messages.

## Alarms

### DTI/PRI Yellow alarm (remote alarm)

A Yellow alarm on the system, indicated by the state of the YELLOW LED on the PRI/DTI circuit card, is notification of a Red alarm at the far end (remote end). The fact that the PRI/DTI circuit card is receiving the Yellow alarm pattern indicates that there is a T1 connection, but the far end is not ready.

It is possible, however, that the T1 connection is one-way only — that is, receiving only, since this end is receiving the alarm. The Yellow alarm is transported in one of two ways: using digit-2 or the facility data link (DG2 or FDL).

When the PRI/DTI circuit card receives a Yellow alarm, the channels are placed into the maintenance busy state.

Each time a Yellow alarm is generated, a counter is incremented. When the Yellow alarm 24-hour threshold (prompt RALM in LD 73) is reached, the PRI/DTI circuit card must be restored to service manually.

### DTI/PRI Red alarm (local alarm)

A Red alarm (local alarm) indicates that the digital trunks or B-channels have been taken out-of-service (OOS) due to a loss of frame alignment lasting more than three seconds, or due to some facility performance OOS threshold being exceeded.

Maintenance and OOS messages are discussed later in this chapter.

## DTI/PRI maintenance tools

### Maintenance commands

Table 29 "DTI/PRI commands (LD 60)" (page 97) through Table 31 "Downloadable D-channel (DDCH) commands (LD 96)" (page 98) provide quick-reference lists of important DTI/PRI commands. Table 32 "TMDI maintenance commands" (page 99) and Table 33 "D-channel monitoring commands" (page 100) pertain to the NTRB51 TMDI card.



#### WARNING

The user must disable the D-channel and clock-controller daughterboards before unseating circuit cards. Otherwise, the system performs INIT and momentarily interrupts call processing.



#### WARNING

Extreme care must be taken when enabling the D-channel message monitoring option due to the possible heavy volume of messages during normal traffic. Use this command only during very light or no traffic conditions for trouble-shooting purposes. Remember to disable the monitoring tool when you are finished — it does not time-out. Monitor enabled status is saved by EDD and remains enabled even after a SYSLOAD.

The port (TTY) performing the monitoring **must** have MTC and BUG programmed.

**Table 29**  
**DTI/PRI commands (LD 60)**

Command	Action
DISI C	Disable DTI/PRI card when idle.
DISL C	Force disable DTI/PRI card.
ENLL C	Enable DTI/PRI card.
LCNT (C)	List alarm counters.
RCNT (C)	Reset alarm counters.
SLFT (C)	Do DTI/PRI self-test.
STAT (C)	List DTI/PRI status.
RLBK	Remote loopback.

**Table 30**  
**D-channel commands (LD 96)**

Command	Action
DIS DCH N	Disable DCHI port N.

Command	Action
DIS MSGI N	Disable monitoring of incoming D-channel messages on link N. Monitor remains active until disabled.
DIS MSGO N	Disable monitoring of outgoing D-channel messages on link N. Monitor remains active until disabled.
DIS AUTO N	Disable autorecovery of the D-channel. Hardware may still respond to recovery initiated from the far end.
ENL AUTO N	Enable autorecovery of the D-channel. Software periodically commands hardware to establish the layer 2 link.
ENL DCH N	Enable DCHI port N.
ENL MSGI N	Enable monitoring of incoming D-channel messages on link N. Use only under light traffic.
ENL MSGO N	Enable monitoring of outgoing D-channel messages on link N. Use only under light traffic.
EST DCH N	Establish D-channel N.
PLOG DCH N	Print D-channel statistics log N.
RLS DCH N	Release D-channel N.
SDCH	Release a D-channel and switch D-channels.
RST DCH N	Reset D-channel N.
STAT DCH (N)	Print D-channel status (link status).
STAT MSGI (N)	Print incoming message monitor status.
STAT MSGO (N)	Print outgoing message monitor status.
TEST-100/101/200/201	See DCH tests in technical document.
STAT SERV	Print the current service and service acknowledge message for DCHI N.
ENL SERV N	Enable service messages for DCHI N.
DIS SERV N	Disable service messages for DCHI N.

**Table 31**  
**Downloadable D-channel (DDCH) commands (LD 96)**

Command	Action
DIS MSDL X (ALL)	Disable DCHI card X.
ENL MSDL X (FDL, ALL)	Enable DCHI card X, with or without Force Download.
RST MSDL X	Reset MSDL card X.

Command	Action
STAT MSDL X (X (full))	Get MSDL status X, or a "FULL STATUS".
SLFT MSDL X	Execute a self-test on MSDL card X.
DIS LLB X	Disable local loop back on MSDL DCH X.
DIS RLB X	Disable remote loop back on MSDL DCH X.
DIS TEST X	Disable Test mode on MSDL DCH X.
ENL LLB X	Enable local loop on MSDL DCH X.
ENL RLB X	Enable remote loop on MSDL DCH X.
ENL TEST X	Enable Test mode on MSDL DCH X.
PCON DCH X	Print configuration parameters on MSDL DCH X.
PMES DCH X	Print incoming layer 3 messages on MSDL DCH X.
PTRF DCH X	Print traffic report on MSDL DCHX.
TEST LLB X	Start local loop back test on MSDL DCH X.
TEST RLB X	Start remote loop back test on MSDL DCH X.

**Note:** "X" represents the D-channel device number.

### TMDI maintenance commands

The Maintenance Overlays for the TMDI card have been enhanced. LD 60 is no longer used for TMDI card and loop maintenance. Only LD 96 is used to handle enabling and disabling of TMDI cards and their associated loop. Following are the descriptions of LD 96 command enhancements for TMDI:

**Table 32**  
**TMDI maintenance commands**

Command	Description
DIS TMDI x	Disable TMDI card x.
DIS TMDI x ALL	Disables the TMDI card and various applications on the TMDI. If a DCH is configured on the TMDI, the DCH is released and the DCH application is disabled. The TMDI associated loop is also disabled. Active calls are force disconnected. All channels are disabled.

Command	Description
ENL TMDI x (FDL)	Enable TMDI card x and force a download. This command only works if TMDI is disabled (loop also disabled). It attempts to force download all required applications to TMDI card and then re-enable the card. When download is completed without error, ENL TMDI x ALL or ENLL x in Overlay 60 is required to re-enable the TMDI L1 application and the loop. Under normal conditions, option FDL to force download f/w to the TMDI card is not required. If the TMDI card does not have the latest f/w, the f/w is automatically downloaded after ENLTMDI x command is enabled. Force download f/w to the TMDI is only required if a new PSDL file is created for TMDI f/w. Once the f/w is downloaded, it burns into the flash on the card. If this card is disabled and re-enabled again, force download to the card is not necessary.
ENL TMDI x ALL	Enable the TMDI card and various applications on the card. Also enables the associated loop. If a DCH is configured on the TMDI, a background audit enables and establishes the DCH, once the loop is up. DCH layer 3 should be established within about 30 seconds.
RST TMDI x	Reset TMDI card x.
SLFT TMDI x	Invoke self-test on TMDI card x.
STAT TMDI (x FULL)	Get TMDI status.

## D-channel monitoring on the TMDI card

**Table 33**  
**D-channel monitoring commands**

Command	Action
DIS TMDI x MSGI	Disable monitoring of incoming D-channel messages on TMDI card x.
DIS TMDI x MSGO	Disable monitoring of outgoing D-channel messages on TMDI card x.
ENL TMDI x ALL MSGI	Enable monitoring of incoming D-channel messages on TMDI card x.
ENL TMDI x ALL MSGO	Enable monitoring of outgoing D-channel messages on link TMDI card x.
ENL TMDI x ALL DBG	Enable debugging on TMDI card x.
DIS TMDI x DBG	Disable debugging on TMDI card x.

Command	Action
PSWD TMDI	Print passwords.
STAT TMDI x MON	Print monitoring commands for TMDI card x.

D-channel status and error conditions are reported as DCH messages. These messages can be found in the *Software Input Output Reference - System Messages (NN43001-712)*.

**Table 34**  
**Clock controller commands (LD 60)**

Command	Action
DIS CC N	Disable clock controller N.
ENL CC N	Enable clock controller N.
SSCK N	Status of clock controller N.
TRCK XXXX N	Set clock controller tracking.
	Where xxxx =
	PCK = Track primary clock reference source.
	SCLK = Track secondary clock reference source.
	FRUN = Free run mode.

### NTAK09 DTI/PRI power on self-test

When power is applied to the NTAK09 DTI/PRI circuit card, the card performs a self-test. The LEDs directly associated with the NTAK09 circuit card are DIS, ACT, RED, YEL, and LBK. The clock controller LED is also included in the power on self-test. See [Table 35 "NTAK09 LED states during self-test" \(page 102\)](#).

[Table 35 "NTAK09 LED states during self-test" \(page 102\)](#) provides the state of the NTAK09 LEDs during the self-test procedure.

**Table 35**  
**NTAK09 LED states during self-test**

Action	LED State
Power up system Self-test in progress	Top five LEDs on for eleven seconds. Top five LEDs go off for one second.  If the self-test passes, the top five LEDs flash on and off three times.  If the self-test detects a partial failure, the top five LEDs flash on and off five times.  When the self-test is completed, the LEDs are set to their appropriate states.

### **NTAK20 power on self-test**

The clock controller daughterboard LED is the second LED from the bottom on the faceplate of the NTAK09 DTI/PRI card.

When power is applied to the NTAK20 clock controller, the LED is initially off for two seconds. If the self-test passes, the LED turns Red and flashes on and off twice.

When the self-test completes, the LED remains Red until the clock controller is enabled. When enabled, the clock controller LED turns green or flashes green.

### **NTAK93 self-test**

The NTAK93 DCHI daughterboard LED is the bottom LED on the faceplate of the NTAK09 DTI/PRI card.

The NTAK93 DCHI daughterboard does not perform a self-test when power is applied to it. When power is applied, it turns Red and remains steadily lit, indicating the D-channel is disabled. When the D-channel is enabled, the LED turns green and remains steadily lit.

Self-tests of the NTAK93 daughterboard are invoked manually by commands in LD 96.

### **DTI/PRI local self-test**

The local self-test, also called a local loopback test, checks speech path continuity, zero code suppression, remote alarm detection, and A and B bit signalling. This test is performed manually on a per-loop (or link 24

channels) or per-channel basis. The local loopback test performs a local logical loopback and does not require any external loopback of the T-1 signal.

### Restrictions and limitations

Disable the DCHI and DTI/PRI before performing the self-test on the entire DTI/PRI card. Individual channels must be disabled before performing a self-test on a particular channel.

#### Procedure 14

##### Self-testing the DTI/PRI card

Step	Action
------	--------

*To perform a self-test on the entire DTI/PRI card:*

- |   |                                                                                                                                                            |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Enter the following command in LD 96 to disable the DCHI:<br><br>DIS DCH N                                                                                 |
| 2 | Enter the following command in LD 60 to disable the DTI/PRI card and run the self-test:<br><br>DISL C<br><br>SLFT C (entire card)                          |
| 3 | To self-test individual channels, follow the same procedure as above, but use the following commands:<br><br>DSCH C CH<br><br>SLFT C CH (specific channel) |

---

—End—

---

### DTI/PRI automatic local loopback test

There are two types of automatic local loopback tests:

- ATLP 0 (disable auto loopback test in daily routine: LD 60)
- ATLP 1 (enable auto loopback test in daily routine: LD 60)

The automatic loop test checks the same functions as the manual self-test, but runs automatically as part of the midnight routines.

ATLP 0 disables one idle channel at random and performs a single channel self-test. This channel cannot be specified; it is selected by software.

ATLP 1 attempts to test the whole DTI/PRI loop. If ATLP 1 finds all channels in the target link idle, it takes the whole link down and tests it. The node where the self-test is performed sends out a Yellow alarm while the link is down.

Ensure that LD 73 TRSH RALM is not exceeded at the far end due to the automatic loop test. If TRSH RALM (default = 3) is exceeded at the far end, trunks remain out of service.

### Remote loopback and remote self-test

The remote loopback and the remote self-test are performed manually per loop (or per system card).

#### Remote loopback

The RLBK C command puts the DTI/PRI into loopback toward the far end so a remote self-test can be performed on equipment at the far end.

**Note:** The DTI/PRI loop (card) being tested must be disabled.

#### Remote loopback test

The remote self-test, also called the external loopback test, checks the integrity of the DTI/PRI through an external T-1 loopback. If the Remote Loopback command (RLBK) is executed at the far-end system prior to executing the Remote self-test command (RMST) at the near end, the integrity of the DS-1 facility is tested from end-to-end.

**Note:** The DTI/PRI channel or loop (card) being tested must be disabled.

### Procedure 15

#### Coordinating the tests

Step	Action
1	When a technician at the far end requests a remote loopback on the local system: <ol style="list-style-type: none"> <li>Enter the following command in LD 96 to disable the DCHI (for PRI DCHL or BCHL):               <pre>DIS DCH N</pre> </li> <li>Enter the following command in LD 60 to disable the DTI/PRI card and activate remote loopback mode:               <pre>DISL C</pre> <pre>RLBK C</pre> </li> </ol>
2	To run the remote self-test (external loopback test) through a loopback on the far-end system:

- a. Call a technician at the far end. Ask for remote loopback mode on the facility to be tested.
- b. When loopback mode at the far end is confirmed, enter the following command in LD 96 to disable the DCHI (for PRI DCHL or BCHL):

```
DIS DCH N
```

- c. Enter the following command in LD 96 to disable the DTI/PRI card and run loopback test:

```
DISL C
```


```
RMST C
```

**Note:** The Remote self-test (external loopback test) can be run through any loopback that is external to the DTI/PRI card. The loopback can range from a loopback connector plugged into the NTBK04 cable to a remote loopback on the far-end DTI/PRI, or at any point in between on the DS-1 facility.

Figure 15 "DTI/PRI link diagnostic and remote loopback tests" (page 105) shows the relationship between the remote loopback test and the link diagnostic test.

—End—

**Figure 15**  
DTI/PRI link diagnostic and remote loopback tests

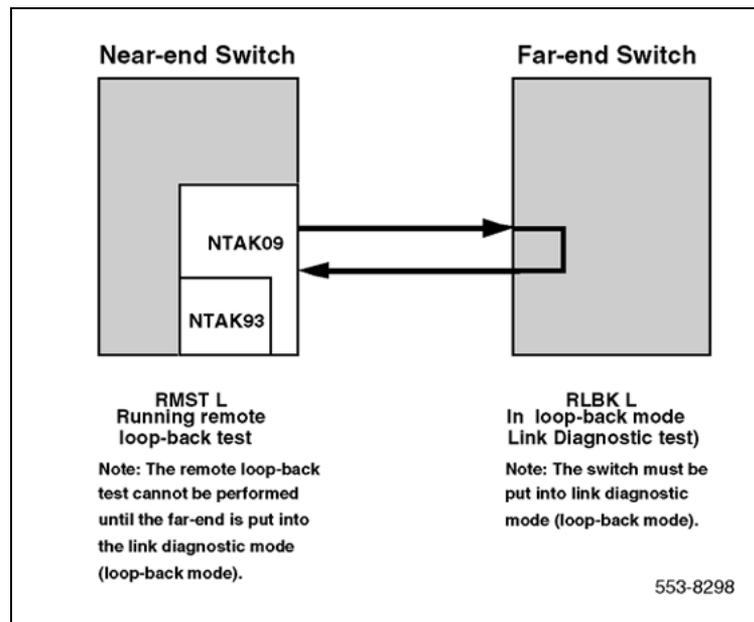

## DTI/PRI error detection

### Bit error rate

Bit error rate monitoring detects errors in transmission (see [Figure 16 "Bipolar violations"](#) (page 106)). There are two methods of bit error monitoring: bipolar violation tracking and Cyclic Redundancy Check (CRC).


If the D2, D3, or D4 framing format is selected in LD 17 prompt DLOP, then bipolar violation tracking is implemented. If the Extended Superframe (ESF) format is selected, CRC is implemented.

### Bipolar Violation tracking

In a bipolar pulse stream, pulses alternate in polarity. A bipolar violation (BPV) has occurred if, after transmission, two pulses of the same polarity are received in succession (this could be caused by an electrical disturbance such as noise).

**Note:** Bipolar 8 Zero Substitution (B8ZS) introduces intentional bipolar violations. The T1 equipment must treat them as such and disregard them. This explains why B8ZS can be used only if all the equipment on the T1 span (end-to-end) supports it. Otherwise, the intentional BPVs take the link down.

**Figure 16**  
**Bipolar violations**

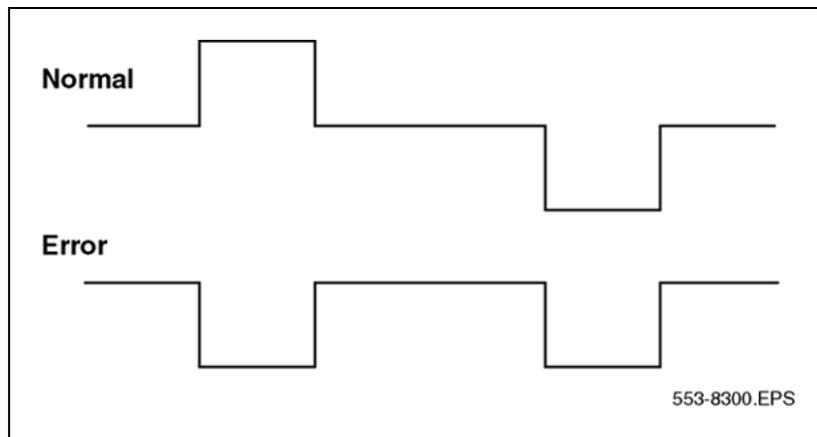

### Cyclic Redundancy Check

The ESF contains a checksum of all data in the frame. The receiving side uses the checksum to verify the data.

The primary difference between BPV and cyclic redundancy check (CRC) is that bipolar violation tracking indicates errors in the local span, while CRC indicates errors on an end-to-end span. For example, on a satellite link,

BPV detects errors only in the span between the system and the satellite connection. Since CRC traverses the entire span, it indicates an end-to-end bit error rate.

DTI/PRI hardware detects BPV or CRC errors. It sends an overflow (OVFL) message to the system CPU each time 1024 BPV or CRC errors are detected. Running the midnight routines prints the number of overflows and clears the counter.

### Bit error rate threshold messages


There are three bit error rate thresholds set in LD 73, using one of two prompts: BIPV or BIPC. When a threshold is reached, a DTA message is produced. See [Table 36 "Bit error rate messages" \(page 107\)](#).

**Table 36**  
**Bit error rate messages**

Message	Explanation
DTA011	Bit error rate maintenance threshold has been reached.
DTA012	Bit error rate out-of-service limit has been reached.
DTA013	Too many bit error rate out-of-service occurrences in the last 24 hours.

Refer to [Figure 17 "BIPV and BIPC thresholds" \(page 108\)](#) for BIPV and BIPC thresholds.

**Figure 17**  
**BIPV and BIPC thresholds**

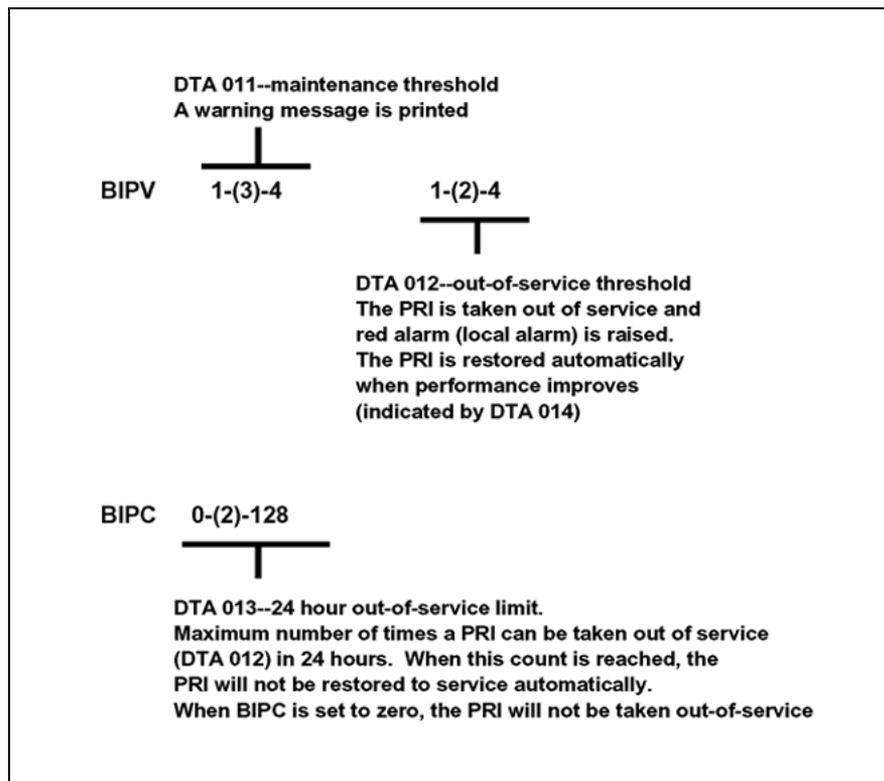

### Frame slip

Digital signals must have accurate clock synchronization for data to be interleaved into, or extracted from, the appropriate timeslot during multiplexing and de-multiplexing operations. A frame slip is defined as the repetition or deletion of the 193 data bits of a DS-1 frame due to a sufficiently large discrepancy in the read and write rates at the buffer (clocks aren't operating at exactly the same speed).

When data bits are written into (added to) a buffer at a slightly higher rate than that at which they are being read (emptied), sooner or later the buffer overflows. This is a slip-frame deletion.

In the opposite situation, when data bits are written (added) into a buffer at slightly lower rate than that at which they are read (emptied), eventually the buffer runs dry or underflows. This is also a slip-frame repetition.

Either occurrence is called a slip (or a controlled slip). The system contains a buffer large enough to hold about 2 full DS-1 frames ( $193 * 2 = 386$ ). It is normally kept half-full (1 frame). Slippage impacts data transfer as shown

in Table 37 "Impact of slip on service types" (page 109). The degradations shown in Table 37 "Impact of slip on service types" (page 109) can be controlled or avoided with proper clock (network) synchronization.

**Table 37**  
**Impact of slip on service types**

Service	Potential Impact
Encrypted Text	Encryption key must be resent.
Video	Freeze frame for several seconds. Loud pop on audio.
Digital Data	Deletion or repetition of Data. Possible Misframe.
Facsimile	Deletion of 4-8 scan lines. Drop Call.
Voice Band Data	Transmission Errors for 0.01 to 2 s. Drop Call.
Voice	Possible Click.

### Types of synchronization

Clock synchronization can be either tracking on the primary or secondary reference clock or free run (non-tracking). In LD 73 (prompts PREF and SREF), the DTI/PRI which supports the clock controller daughterboard is defined as the primary clock reference.

Another DTI/PRI may be defined as the secondary clock reference. The clock controller synchronizes from the primary or secondary's incoming pulse stream. The clock controller supplies clocking to all the other DTI/PRI loops.

DTI/PRI hardware detects frame slips in tracking and free-run modes. For tracking mode, running the midnight routines prints the number of overflows and clears the counter. For free-run mode, running the midnight routines prints the number of frame deletions and repetitions and clears the counters.


### Tracking mode

There are two thresholds set in LD 73 the SRTK prompt. Refer to the description in LD 73. Also see [Figure 18 "Frame slip tracking thresholds" \(page 110\)](#).

**LD 73 - SRTK prompt**

Prompt	Response	Description
SRTK	1-(5)-24 1-(30)-3600	<p>Slip rate maintenance (in hours) and out-of-service threshold (per hour).</p> <p>These are the frame slip rate thresholds for the tracking mode. The first value is the maintenance threshold; the elapsed time (in hours) in which 2 frame slips occur (default is two slips in five hours). The second value is the out-of-service threshold; or the number of slips allowed in one hour (default is 30 slips in 1 hour).</p> <p>When a threshold is reached, a DTA messages is output as follows:</p> <p>DTA015:Frame slip — tracking — maintenance limit.</p> <p>DTA016:Frame slip — tracking — out of service limit.</p>

**Figure 18**  
**Frame slip tracking thresholds**

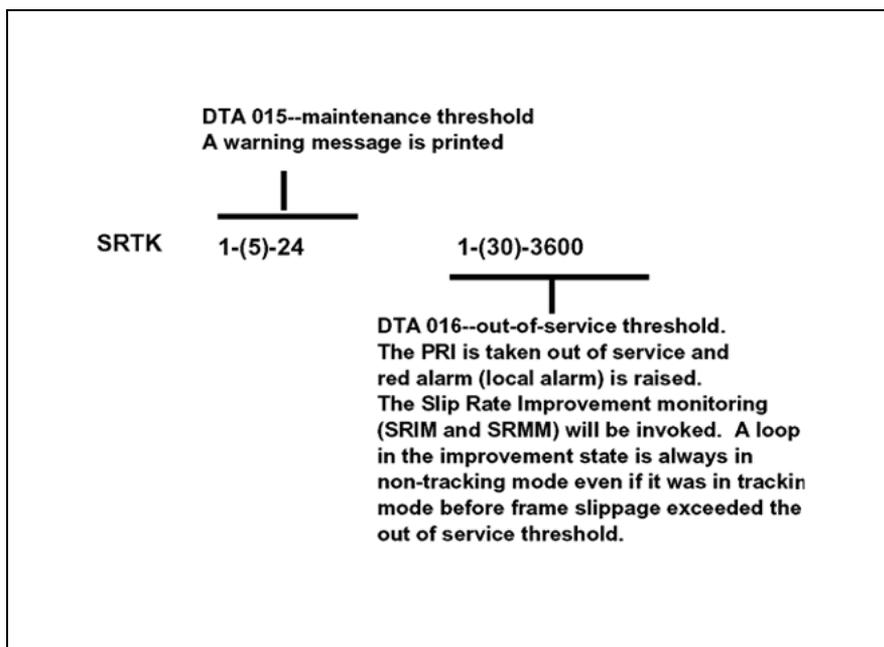


**Free run (non-tracking) mode**

A maintenance threshold and an out-of-service threshold are set in LD 73 as described below. Also, see [Figure 19 "Frame slip non-tracking thresholds"](#) (page 111) for additional information.

## LD 73 - SRNT prompt

Prompt	Response	Description
SRNT	1-(15)-1024 1-(3)-1024	<p>Non-tracking slip rate maintenance and out-of-service thresholds.</p> <p>These are frame slip rate thresholds for the non-tracking mode. The first value is the maintenance threshold in seconds, the amount of time in which 10 slips occur (default is 10 slips in 15 seconds). The second value is the out-of-service threshold in seconds, the amount of time in which 10 slips occur (default is 10 slips in three seconds).</p> <p>When these thresholds are reached, DTA messages are output. Related DTA messages are described below. See <a href="#">Figure 19 "Frame slip non-tracking thresholds"</a> (page 111).</p> <p>DTA017:Frame slip — free run (non-tracking) — maintenance limit.</p> <p>DTA018:Frame slip — free run (non-tracking) — out-of-service limit.</p>

**Figure 19**  
**Frame slip non-tracking thresholds**

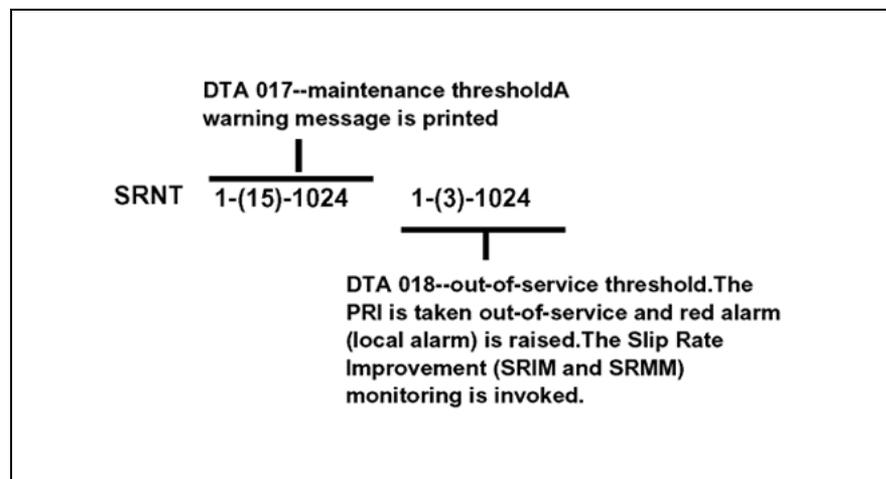

### Frame slippage improvement timers

Once the frame slip out-of-service threshold has been reached, the DTI/PRI software invokes a Slip Rate Improvement mechanism to monitor the slippage and return the DTI/PRI card to service if a specific criterion has been met. The criterion used to determine that the slip rate has improved

enough to return a DTI/PRI card to service is that the maintenance threshold is exceeded less than M (the LD 73 prompt SRMM defines M) times in N (the LD 73 prompt SRIM defines N).

It is important to realize that this monitoring applies to both tracking and non-tracking modes. Note that a DTI/PRI card in the Slip Rate Improvement state is always in non-tracking mode, even if it was in tracking mode before frame slippage exceeded the out-of-service threshold.

There are two thresholds set in LD 73 as described in [Table 38 "Frame slip improvement timers"](#) (page 112).

**LD 73 - SRIM and SRMM prompts**

Prompt	Response	Description
SRIM	(1)-127	Slip Rate Improvement time in minutes.  After the tracking or non-tracking mode frame slippage out-of-service threshold is exceeded, the slip rate is monitored for improvement. If the non-tracking maintenance threshold exceeds SRMM or fewer times in the duration of this timer, then the trunks are returned to service. Otherwise, this timer is reset and monitoring continues.
SRMM	1-(2)-127	Slip Rate exceeded maintenance limit.  Number of times the Slip Rate exceeds the maintenance limit while waiting for Slip Rate Improvement during the time window specified at the SRIM prompt.  While waiting for Slip Rate Improvement one of three DTA messages is output as shown in <a href="#">Table 38 "Frame slip improvement timers"</a> (page 112).

**Table 38**  
**Frame slip improvement timers**

<b>SRIM</b>	<b>(1)-127</b>  DTA 026 - Frame slip out-of-service limit has been reached while monitoring frame slip improvement. Trunks remain out-of-service, and improvement timer is restarted.  DTA 028 - Frame slip maintenance limit has been reached while monitoring frame slip improvement. Trunks remain out-of-service, and improvement timer is restarted.
-------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>SRIM</b>	<b>(1)-127</b>
	DTA 029 - Frame slip improvement timer has expired, Slip Rate Improvement Criteria has been met. Trunks are being returned to service.
<b>SRMM</b>	<b>1-(2)-127</b>

### Frame alignment

Loss of frame alignment occurs when the DTI/PRI card stops receiving the framing pattern on the DS-1 byte stream for a pre-defined period of time (three seconds). See "[Frame alignment thresholds](#)" (page 114) and "[Loss of frame alignment](#)" (page 115). This condition can occur as a result of the far end of the T1 span going completely out-of-service or any other reason resulting in losing the incoming DS-1 pulse stream.

#### Loss of frame alignment thresholds


DTI/PRI hardware detects out-of-frame conditions. Running the midnight routines prints the number of occurrences when frame alignment was lost and clears the counters.

There are three frame alignment thresholds set in LD 73. When a maintenance or out-of-service threshold is reached, a DTA message is output as shown in "[Frame alignment thresholds](#)" (page 114).

**Table 39**  
**DTA message output**

DTA019	Frame alignment maintenance limit.
DTA020	Frame alignment out of service limit.

### Frame alignment thresholds

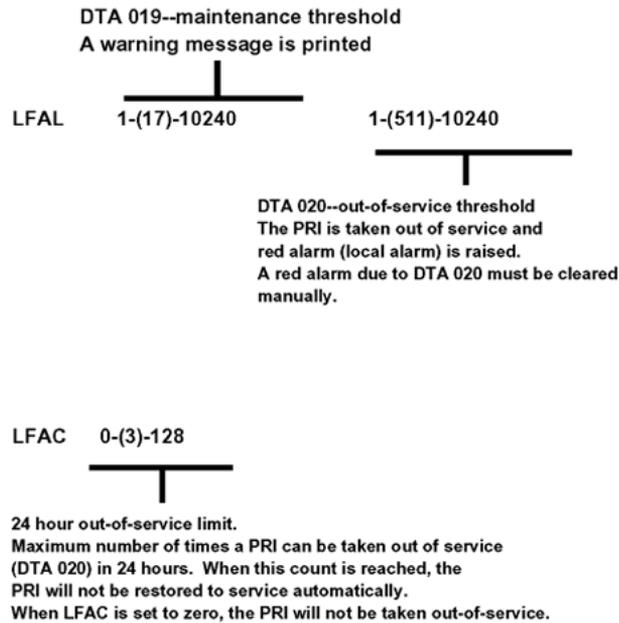

If a loss of frame alignment condition persists for three seconds, the affected DTI/PRI card is taken out-of-service and a Red alarm (local alarm) is raised. See "[Loss of frame alignment](#)" (page 115).

If the loss of frame alignment condition clears at least 15 seconds, the DTI/PRI is automatically restored to service. The following DTA message is generated:

**Table 40**  
**DTA message output**

DTA021	Loss of frame alignment has persisted for 3 seconds.
--------	------------------------------------------------------

## Loss of frame alignment



## Alarm threshold recommendations for digital trunks

If a digital trunk is present in an IP expansion cabinet, link outages due to data network performance degradation between the main cabinet and the expansion cabinet causes alarms on the far end of the digital trunk. If link outages are frequent, alarm thresholds on the far end may need to be increased to prevent the trunk from being placed in a state requiring manual intervention to recover.

## Clock operation

The system supports a single clock controller that can operate in one of two modes: tracking or non-tracking (also known as free-run).

## Tracking mode

In tracking mode, one or possibly two DTI/PRI cards supply a clock reference to a clock controller daughterboard. When operating in tracking mode, one DTI/PRI is defined as the primary reference source for clock synchronization, while the other is defined as the secondary reference source (PREF and SREF in LD 73).

There are two stages to clock controller tracking:

- tracking a reference, and
- locked onto a reference.

When tracking a reference, the clock controller uses an algorithm to match its frequency to the frequency of the incoming clock. When the frequencies nearly match, the clock controller locks onto the reference. The clock controller makes small adjustments to its own frequency until both the incoming and system frequencies correspond.

If the incoming clock reference is stable, the internal clock controller tracks it, locks onto it, and matches frequencies exactly. Occasionally, however, environmental circumstances cause the external or internal clocks to drift.

When this happens, the internal clock controller briefly enters the tracking stage. The green LED flashes momentarily until the clock controller locks onto the reference again.

If the incoming reference is unstable, the internal clock controller remains in the tracking stage, with the LED flashing green all the time. This condition does not present a problem, rather, it shows that the clock controller continually attempts to lock onto the signal. If slips occur, however, there is a problem with the clock controller or the incoming line.

### **Free-run (non-tracking)**

In free-run mode, the clock controller does not synchronize on any source. It provides its own internal clock to the system. This mode can be used when the system serves as a master clock source for other systems in the network. Free-run mode is undesirable if the system is intended to be a slave. It can occur, however, when both the primary and secondary clock sources are lost due to hardware faults or when invoked by software commands.


### **Reference clock errors**

System software checks every 15 minutes to see if a clock controller or reference clock error has occurred.

In tracking mode, the clock controller tracks on one reference clock. If a clock controller error is detected, or if there is a problem with the reference clocks, the system switches to free-run mode.

A reference clock error occurs when there is a problem with clock driver or with the reference system clock at the far end. If the clock controller detects a reference clock error, with only one of the reference clocks, the reference clock switches to the usable clock.

**Figure 20**  
**Clock controller primary and secondary tracking**

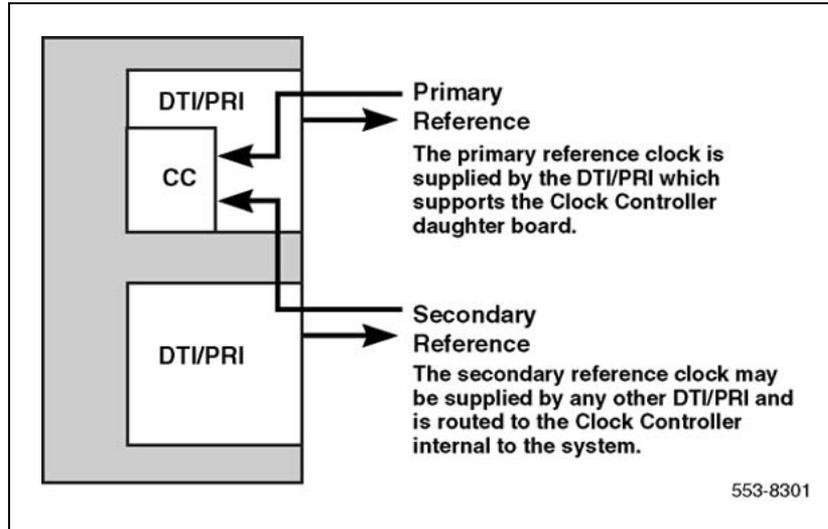

### Automatic clock recovery

Automatic switchover of the primary and secondary reference clocks is always *enabled* in the system.

**Note:** EREF and MREF commands in LD 60, which control the enabling and disabling of automatic clock recovery, are not supported on the system.

### Procedure 16

#### Replacing equipment

Step	Action
------	--------

*Use the following procedure before reseating any one or more of the following: the NTAK09, the NTAK20, or the NTAK93.*

- |   |                                                                                                                                                                                                                                       |
|---|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | If the NTAK93 DCHI daughterboard is installed, enter the following command in LD 96 to software disable the D-channel (DCHI):<br><br><b>DIS DCH x</b><br><br>where<br><br><b>x</b> is the DCHI port number that was assigned in LD17. |
| 2 | If the NTAK20 Clock Controller daughterboard is installed, enter the following command in LD 60 to software disable it:<br><br><b>DIS CC 0</b><br><br>where                                                                           |

CC is the card slot number of the NTAK09 that supported the NTAK20 Clock Controller.

- 3 Enter the following command in LD 60 to software disable the DTI/PRI card:

```
DISL x
```


where

x is the card slot number of the NTAK09 DTI/PRI.

- 4 To replace the NTAK09 by the lock latches, unlock the latches and slide the card out of the cabinet. Once out of the slot you can remove any of the daughterboards.

**Note:** To avoid damage to the circuit cards from electrostatic discharge, wear the wrist strap connected to the inside of your cabinet when you handle the circuit cards. "[Wrist strap connection to the cabinet](#)" (page 118) shows the connection point for the wrist strap.

#### Wrist strap connection to the cabinet

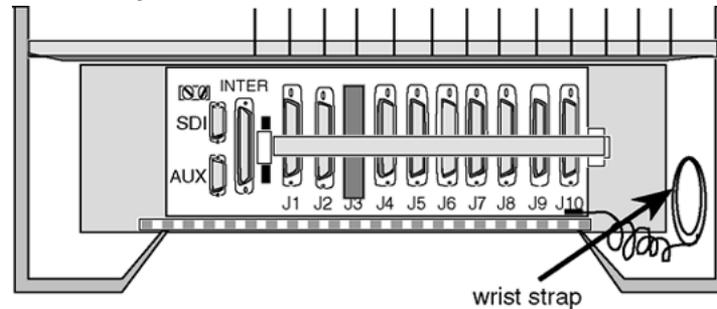

553-8289.EPS

- a. To remove the NTAK20 Clock Controller daughterboard, grasp the NTAK20 at opposite corners and gently "wiggle" it back and forth until all four corners are free. Do not bend the connector pins.
  - b. To remove the NTAK93 Clock Controller daughterboard, grasp the NTAK93 at opposite corners and gently "wiggle" it back and forth until all four corners are free. Once the corners are free of the stand-off, grasp the NTAK93 by its upper and lower right corners and slowly lift the right side of the NTAK93 up and away from the NTAK09 connectors, being careful not to bend any of the pins.
- 5 To replace the NTAK09 DTI/PRI card, NTAK20 Clock Controller or NTAK93 DCHI, refer to PRI implementation and DTI implementation

in *ISDN Primary Rate Interface Installation and Commissioning (NN43001-301)*. Be sure to set any switches and install any daughterboards as required.

- 6 Tag any defective or damaged equipment with a description of the problem and package it for return to a repair center.

---

—End—

---



---

## 1.5 Mb ISL maintenance

---

### Contents

This section contains information on the following topics:

"Overview" (page 121)

"ISL maintenance tools" (page 124)

### Overview

From a maintenance perspective, ISL operation consists of these elements:

- hardware and software states
- near-end and far-end status
- link and/or span integrity

ISL operation is monitored and reported on through service messages.

System maintenance provides several tools, manual or automatic, for maintaining effective ISL operation. These tools are service commands (accessible through the software overlays) and diagnostic routines.

### Maintenance messages

The following sections describe service messages that can appear on the system maintenance TTY as a result of ISL operation.

D-channel status and error conditions are reported as DCH messages. PRI status and error conditions are reported in the messages found in [Table 41 "Status messages" \(page 121\)](#). Additional information on DCH and PRI messages can be found in the *Software Input Output Reference - System Messages (NN43001-712)*.

**Table 41**  
**Status messages**

Message	Meaning
DTA	Digital Trunks

Message	Meaning
DTI	Digital Trunk Interface
PRI	Primary Rate Interface

### Message descriptions

Service messages provide near-end and far-end switch status. Both service and service acknowledge messages are supported on PRI B-channels and ISL channels.

Service and service acknowledge messages for B-channels and ISL channels are supported:

- System to system: ISL and PRI
- System to DMS-100: PRI only
- System to DMS-250: PRI only
- System to AT&T ESS4 and ESS5: PRI only

Service and service acknowledge messages for B-channels and ISL channels report the following status types:

- in-service
- maintenance
- out-of-service

Near-end and far-end sub-categories are defined for each maintenance status. See [Table 42 "Maintenance message and status combinations" \(page 122\)](#) for possible combinations of near-end and far-end status and the channel capability for each status. When near-end and far-end status do not match, the more severe maintenance status takes effect.

**Table 42**  
**Maintenance message and status combinations**

Near-end status	Far-end status	B or ISL channel capability
In-service	In-service	Incoming and outgoing call allowed
In-service	Maintenance	Incoming calls allowed only
In-service	Out-of-service	Not allowed to use
Maintenance	N/A	Not allowed to use
Out-of-service	N/A	Not allowed to use

## Message functions

Service messages are used to monitor the following:

- D-channel establishment
- D-channel sanity polling
- B-channel or ISL channel status change
- Channel status audit

**D-channel establishment** When the D-channel establishes, the B-channel status is supported by sending service messages for each B-channel controlled by a D-channel. This allows the far end to synchronize its channel states. These services messages are sent when the D-channel is brought up automatically by the system or manually in LD 96.

**D-channel sanity polling** If a D-channel has been idle for 30 seconds, a service message is sent to poll the sanity of the link. The service message is sent regardless of whether the near end is configured as master or slave.

**B-channel or ISL channel status change** Whenever there is a status change for a B-channel or an ISL channel, the new status is reported to the far end through a service message. Status change can occur through service change or maintenance operations, such as the addition or deletion of a channel in LD 14, or disabling of the associated loop, shelf, card or unit in LD 30, LD 32, LD 36, LD 41 or LD 60.

**Channel status audit** LD 30 is enhanced to allow channel status audit to be initiated. The channels associated with each D-channel are examined and their status is reported to the far end through service messages.

## Activate service messages

Activate the service messages in LD 96 on a D-channel basis. The commands are listed in [Table 43 "D-channel messages" \(page 123\)](#).

**Table 43**  
**D-channel messages**

Command	Description
ENL SERV N	Turns on the support of service and service acknowledge messages for DCH link N.
DIS SERV N	Turns off the support of service and service acknowledge messages for DCH link N.
STAT SERV (N)	Displays the current service and service acknowledge message SERV setting for individual DCH N or DCH.

## ISL maintenance tools

### Maintenance commands

Table 44 "D-channel commands (LD 96)" (page 124) provides a quick reference list of important ISL commands.



#### WARNING

Ensure that other TTYs and D-channels residing on the NTAk02 are disabled.

#### ATTENTION

#### IMPORTANT!

Extreme care must be taken when enabling D-channel message monitoring option due to the possible heavy volume of messages during normal traffic. Use this command only during very light or no traffic conditions for trouble-shooting purposes. Remember to disable the monitoring tool when you are finished.

The port (TTY) performing the monitoring must have MTTC programmed.

**Table 44**  
**D-channel commands (LD 96)**

Command	Action
DIS DCH N	Disable DCHI port N.
DIS MSGI N	Disable incoming D-channel messages on link N *.
DIS MSGO N	Disable outgoing D-channel messages on link N *.
DIS AUTO ON	Disable the D-channel.
ENL AUTO ON	Auto enable the D-channel after SYSLOAD.
ENL DCH N	Enable DCHI port N.
ENL MSGI N	Enable incoming D-channel messages on link N *.
ENL MSGO N	Enable outgoing D-channel messages on link N *.
EST DCH N	Establish D-channel N.
PLOG DCHI N	Print D-channel statistics log N.
RLS DCH N	Release D-channel N.
SDCH	Release a D-channel and switch D-channels.
RST DCH N	Reset D-channel N.
STAT DCH (N)	Print D-channel status (link status).
STAT MSGI (N)	Print incoming message monitor status.
STAT MSGO (N)	Print outgoing message monitor status.

Command	Action
TEST-100/101/200/201	See DCH tests in technical document.
STAT SERV	Print the current service and service acknowledge message for DCHI N.
ENL SERV N	Enable service messages for DCHI N.
DIS SERV N	Disable service messages for DCHI N.

### Maintenance messages


D-channel status and error conditions are reported as DCH messages. These messages can be found in the *Software Input Output Reference - System Messages (NN43001-712)*.

### Maintenance testing

#### ISL back-to-back (without modems)

For maintenance reasons or testing purposes it is sometimes necessary to connect ISL back-to-back (without modems). Use the diagram shown in [Figure 21 "ISL back-to-back connection" \(page 125\)](#) to accomplish the connection. This connection is normally done within the same system in a lab environment.

**Figure 21**  
ISL back-to-back connection

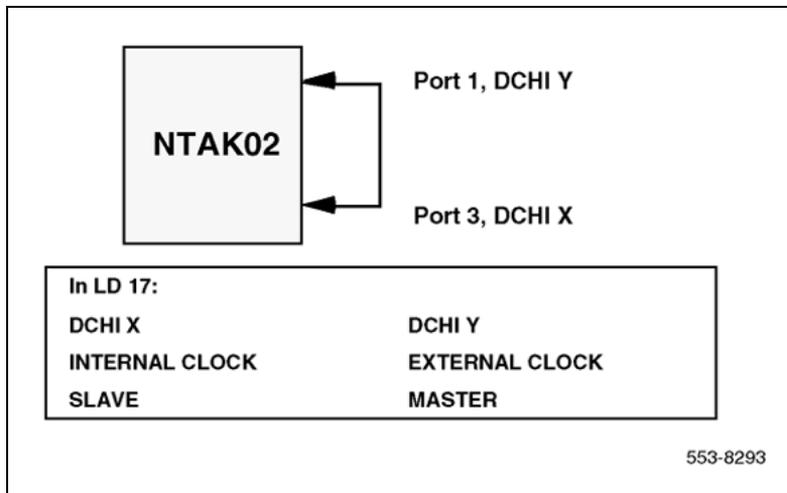



---

## 2.0 Mb DTI maintenance

---

### Contents

This section contains information on the following topics:

"Overview" (page 127)

Procedure 17 "Replacing the NTA10 2.0 Mb DTI circuit card" (page 127)

"Monitor system DTI operation" (page 129)

"System DTI maintenance tools" (page 135)

### Overview

From a maintenance perspective, system Digital Trunk Interface (DTI) operation consists of the following major aspects:

- hardware and software states
- near-end and far-end status
- link and/or span integrity
- clocking status
- frame alignment

System DTI operation is monitored and reported on through maintenance messages, out-of-service alarms, and circuit card faceplate LEDs.

System maintenance provides several tools, either manual or automatic, for maintaining effective DTI operation. These tools are service change and maintenance commands that are accessible through the software overlays and resident diagnostic routines.

#### Procedure 17

#### Replacing the NTA10 2.0 Mb DTI circuit card

---

Step	Action
------	--------

---

*To replace a DTI circuit pack, follow the procedure below:*

- 1 Enter the following command in LD 60 to software disable the NTAk10 2.0 Mb DTI card(s):

```
DISL N
```

Where N is the 2.0 Mb DTI card number.


- 2 Enter the following command in LD 60 to software disable the clock controller:

```
DIS CC 0
```

- 3 Hold the NTAk10 by the lock latches, unlock the latches, and slide the card out of the shelf. Once out of the slot, the daughterboards can be removed.

To avoid damage to the circuit cards from electrostatic discharge, wear the wrist strap connected to the inside of the system whenever handling the circuit cards. [Figure 22 "Wrist strap connection to the Small System" \(page 128\)](#) shows the location of the wrist strap in relation to a Small System cabinet.

**Figure 22**  
**Wrist strap connection to the Small System**

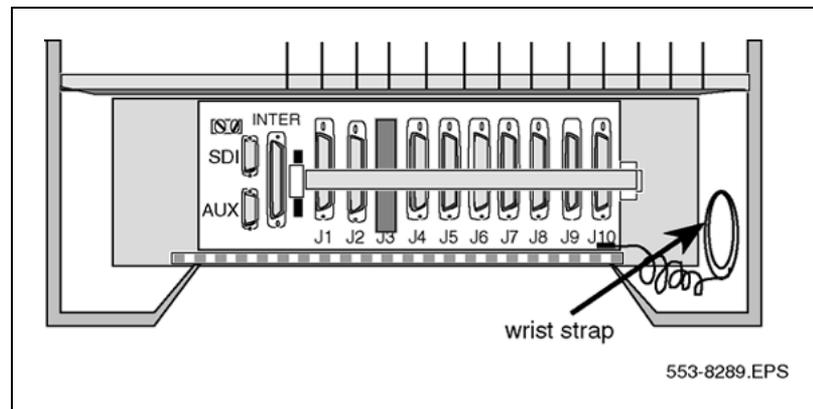

- 4 Slide the new card into the shelf and lock the latches.
- 5 Enter the following command in LD 60 to software-enable all NTAk10 2.0 Mb DTI cards:

```
ENLL N
```

Where N is the 2.0 Mb DTI card number.

- 6 Enter the following command in LD 60 to software enable the clock controller:

```
ENL CC 0
```

- 7 Enable clock tracking on primary digital loop by issuing the following command:

```
TRCK PCK
```

---

—End—

---

## Monitor system DTI operation

### Maintenance messages

The 2.0 Mb DTI status and error conditions are reported in the types of messages, shown in [Table 45 "Maintenance messages" \(page 129\)](#). Additional information on DTI messages is found in the *Software Input Output Reference - System Messages (NN43001-712)*.

**Table 45**  
**Maintenance messages**

Message	Meaning
DTA	Digital Trunk Alarms (Resident Monitor)
DTI	Digital Trunk Interface

### 2.0 Mb DTI error messages

The Digital Trunk Interface diagnostic program (LD 60) is used to maintain the NTA10 2.0 Mb DTI Interface Card.

Comprehensive lists of the self-test failure codes for the NTA10 2.0 Mb DTI follow the self-test description, which starts on ["2.0 Mb DTI tests" \(page 136\)](#).

### Grade-of-service messages

Grade-of-Service messages (DTA XXX) provide near-end and far-end switch status. A summary of these status messages is given in [Table 46 "Grade-of-service messages" \(page 129\)](#).

**Table 46**  
**Grade-of-service messages**

Status	2.0 Mb DTI capability
Acceptable	Both incoming and outgoing calls allowed
Maintenance	Both incoming and outgoing calls allowed
No new data calls	No new outgoing data calls
No new calls	No new outgoing data or voice calls
Out of Service	2.0 Mb DTI is disabled

## 2.0 Mb DTI alarms

There are two groups of alarm indicators monitored by the 2.0 Mb DTI. Within these two alarm groups, there are several individual alarm types.

**Group 1** alarms are event-driven and include indicators that decrement a counter whenever an error is detected. Grade-of-service is changed based on how quickly the threshold of the counter is exceeded. The threshold count is determined in LD 73 and downloaded to the 2.0 Mb DTI. Group 1 alarms are:

1. Bipolar Violations (BPV) — Near-end alarm
2. Slips (SLP) — Near-end alarm
3. Frame Alignment Problems (FAP) — Near-end alarm
4. Cyclic Redundancy Check (CRC-4) — Near-end alarm

**Group II** alarm indicators are either continuous or discontinuous. Grade-of-service is changed based on the duration of the alarm within a defined period of time. A minimum persistence time is defined in LD 73 and downloaded to the 2.0 Mb DTI.


Group II alarm types are listed from high to low priority. A Group II alarm type might not be reported when a greater type is detected.

1. Alarm Indication Signal (AIS) — Far-end alarm
2. Loss of Frame Alignment Signal (LFAS) — Near-end alarm
3. Loss of Multiframe Alignment Signal (LMAS) — Near-end alarm
4. Loss of CRC-4 Multiframe Alignment Signal (CFAS) — Near-end alarm
5. Remote Alarm Indication (RAI, B3) — Far-end alarm
6. Remote Yellow Alarm (B6) — Far-end alarm
7. Alarm Indication Signal, 64 Kilobit (AIS 64) — Far-end alarm

### Group 1

**Bipolar Violation (BPV).** In a bipolar pulse stream, pulses alternate in polarity. A bipolar violation has occurred if, after transmission, two pulses of the same polarity are received in succession (this could be caused by an electrical disturbance such as noise). See [Figure 23 "Bipolar violations" \(page 131\)](#).

**Figure 23**  
**Bipolar violations**

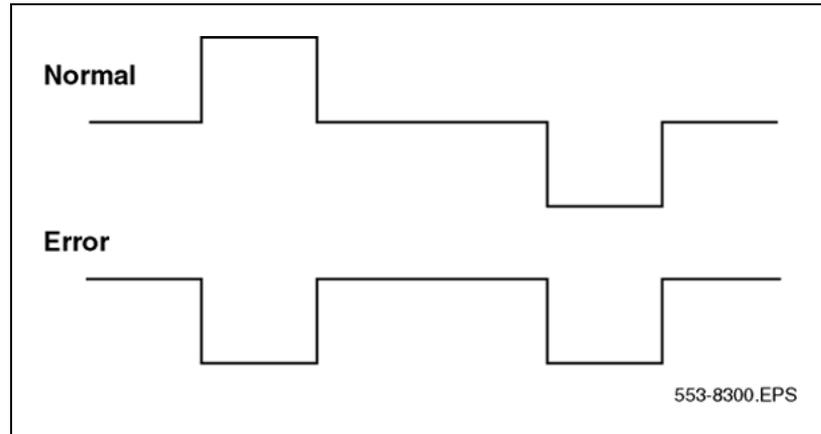

**Cyclic Redundancy Check (CRC-4).** When the 2.0 Mb DTI card runs in CRC-4 mode, the CRC-4 word contains a checksum of all data in the multiframe. The receiving side uses the checksum to verify the data.

The primary difference between BPV and CRC is that bipolar violation tracking indicates errors in the local span, while CRC indicates errors on an end-to-end span. For example, on a satellite link, BPV detects errors only in the span between the system and the satellite connection. Since CRC traverses the entire span, it indicates an end-to-end bit error rate.

**Slip (SLP).** Digital signals must have accurate clock synchronization for data to interleave into, or extract from, the appropriate timeslot during multiplexing and demultiplexing operations. A frame slip is defined as the repetition or deletion of 193 bits (one frame) due to a discrepancy in the read and write rates at the buffer (clocks aren't operating at EXACTLY the same speed).

When data bits write to (add to) a buffer at a slightly *higher* rate than they read (empty), sooner or later the buffer overflows. This is called slip-frame deletion.

In the opposite situation, when data bits write (add) to a buffer at a slightly *lower* rate than they read (empty), eventually the buffer runs dry or underflows. This is called slip-frame repetition.

All degradations shown in [Table 47 "Performance impact of one slip" \(page 132\)](#) can be controlled or avoided by proper clock (network) synchronization.

**Table 47**  
**Performance impact of one slip**

Service	Potential impact
Encrypted Text	Encryption key must be resent.
Video	Freeze frame for several seconds. Loud pop on audio.
Digital Data	Deletion or repetition of Data. Possible Misframe.
Facsimile	Deletion of 4-8 scan lines. Drop Call.
Voice Band Data	Transmission Errors for 0.01 to 2 s. Drop Call.
Voice	Possible Click.

Clock synchronization can be tracking, on the primary or secondary reference clock, or non-tracking (free-run). In LD 73 (prompts PREF and SREF), the 2.0 Mb DTI which supports the active clock controller is defined as the primary clock reference. Another 2.0 Mb DTI can be defined as the secondary clock reference. The clock controller synchronizes from the primary or secondary's incoming pulse stream. The clock controller in turn supplies clocking to all other 2.0 Mb DTI cards.

2.0 Mb DTI hardware detects frame slips in tracking and free-run modes. For tracking mode, running the midnight routines prints the number of overflows and clears the counter. For free-run mode, running the midnight routines prints the number of slips and clears the counters.

**Frame Alignment Problem (FAP).** A Frame Alignment Problem is counted when a bit error occurs within the framing pattern.

## Group 2

**Loss of Frame Alignment Signal (LFAS).** A Loss of Frame Alignment condition occurs when frame alignment is lost on three consecutive frame alignment errors. This condition can occur as a result of the far end of the E1 span going completely out of serviced (due to a power interruption, for example) or any other reason resulting in the loss of the incoming pulse stream. The B3 alarm is sent to the far end after the persistence time expires.

**Loss of Frame Alignment Thresholds.** 2.0 Mb DTI hardware detects out-of-frame conditions. Running the midnight routines prints the number of occurrences when frame alignment was lost and clears the counters.

**Alarm Indication Signal (AIS).** AIS is defined as receiving all "ones" without framing. The detection algorithm for AIS is two or less zeros per two frames. This allows detection of AIS in the presence of a 10E-3 error rate, while not detecting all ones with framing as AIS.

When the AIS is detected, the prompt maintenance alarm indication associated with LFAS and excessive bit error rates are inhibited. B3 alarm is sent to the far end after persistence time expires.

**Alarm Indication Signal 64 Kilobit (AIS64).** There are specific AIS requirements for CNET (France). The first requirement relates to the transmission of AIS in TS16. In that case, all "ones" should be transmitted in the event that abcd signaling is not supported.

With respect to the reception of AIS in TS16, AIS 64 Kbits must be detected when multiframe alignment has been lost and the binary content of TS16 is 95 percent 1, counting on 256 or 512 bits.

When AIS in TS16 is detected, then bit 6 of outgoing TS16 frame 0 should be set. When the fault disappears, it should be cleared. Setting and clearing bit 6 of TRS 16 frame 0 must follow changes in status of the fault by less than 100 msec.

Other requirements when AIS 64 Kbit is detected include setting an LED, printing a TTY message, and updating present status and history files. When a fault is detected, further changes in other error types should continue to be reported.

**Loss of Multiframe Alignment Signal (LMAS).** This condition is sometimes called a multiframe Yellow alarm. An LMAS occurs when two consecutive multiframes contain errors in their Multiframe Alignment Signal, or when all TS16 bits are zero for at least one multiframe.

B6 alarm is sent to the far end after the persistence time expires. If the option is enabled, a B3 alarm is also sent.

**Loss of CRC-4 Multiframe Alignment Signal.** This condition is declared when the CRC-4 multiframe search fails to recognize two valid multiframe alignment words within 8 msec. This category is only relevant however, when the CRC-4 option is selected.

B6 alarm is sent to the far end after persistence time expires. If the option is enabled, a B3 alarm is also sent.

**Remote Alarm Indication (RAI).** Bit 3 of TS0 in non-FAS frames is set to "one". This alarm is sometimes called a Yellow alarm. The far end is receiving AIS.

**Remote Yellow alarm (B6).** Bit 6 of TS16 in Frame 0 is "1". This alarm occurs when the far end has detected a loss of MFA.

### Alarm threshold recommendations for digital trunks

If a digital trunk is present in an IP expansion cabinet/Media Gateway, link outages due to data network degradation between a main cabinet/Call Server and an expansion cabinet/Media Gateway cause alarms on the far end of the digital trunk. If link outages are frequent, increase alarm thresholds on the far end to prevent the trunk from being placed in a state that requires manual intervention to recover.

### NTAK10 faceplate LEDs

The NTAK10 2.0 Mb DTI circuit card has a total of six LEDs on its face. Five of the LEDs are directly associated with the operation of the NTAK10 2.0 Mb DTI circuit card. The remaining LED is associated with the on-board clock controller. [Table 48 "NTAK10 faceplate LEDs" \(page 134\)](#) shows the LEDs found on the NTAK10 2.0 Mb DTI circuit card and the meaning of each.

**Table 48**  
**NTAK10 faceplate LEDs**

LED	State	Definition
DIS	On (Red)	The NTAK10 2.0 Mb DTI circuit card is disabled.
	Off	The NTAK10 2.0 Mb DTI is not in a disabled state.
OOS	On (Yellow)	The NTAK10 2.0 Mb DTI circuit card is in an out-of-service state.
	Off	The NTAK10 is not in an out-of-service state.
NEA	On (Yellow)	A near-end alarm state has been detected.
	Off	No near-end alarm.
FEA	On (Yellow)	A far-end alarm state has been detected.
	Off	No far-end alarm.
LBK	On (Yellow)	NTAK10 2.0 Mb DTI is in loopback mode.
	Off	NTAK10 2.0 Mb DTI is not in loopback mode.
CC	On (Red)	The clock controller is switched on and disabled.
	On (Green)	The clock controller is switched on and either locked to a reference or in free-run mode.
	Flashing (Green)	The clock controller is switched on and locked onto the primary reference.
	Off	The clock controller is switched off.

## System DTI maintenance tools

The LD 60 tables on page 167 provide DTI and clock controller maintenance commands.



### WARNING

Disable the clock controller before unseating circuit cards. Otherwise, the system initializes and momentarily interrupts call processing.

## DTI commands

Below is a quick reference list of important 2.0 Mb DTI commands in LD 60.

### LD 60 - DTI commands

Command	Action
DLBK L	Disable loopback mode for 2.0 Mb DTI.
RLBK L	Enable loopback mode for 2.0 Mb DTI.
DISI L	Disable 2.0 Mb DTI when idle.
DISL L	Force disable 2.0 Mb DTI.
ENLL L	Enable 2.0 Mb DTI.
LCNT (L)	List alarm counters.
RCNT (L)	Reset alarm counters.
SLFT (L)	Do 2.0 Mb DTI self-test.
STAT (L)	List 2.0 Mb DTI status.

## Clock controller commands

Below is a quick reference list of clock controller commands in LD 60.

### LD 60 - Clock controller commands

Command	Action
DIS CC 0	Disable clock controller N.
ENL CC 0	Enable clock controller N.
SSCK 0	Status of clock controller N.

Command	Action
TRCK XXX	Set clock controller tracking. XXX can be:  - PCK = track primary clock - SCLK = track secondary clock - FRUN = free run mode  Track primary clock (PCK) or secondary clock (SCLK) as the reference clock or go to free run (FRUN) mode.
PCK	Track primary clock reference source.
SCLK	Track secondary clock reference source.
FRUN	Free run mode.

## 2.0 Mb DTI tests

### Procedure 18

#### Performing Self-test/local loopback

Step	Action
------	--------

*The NTAK10 self-tests when requested in LD 60. This procedure checks the sanity of the on-board processors, operation of memory, peripheral hardware, and per-channel as well as per-loop loopback.*

*Before this test is run, disable the loop as follows:*

- 1 Enter the following command in LD 60 to disable the NTAK10.

```
LD 60
DISL L CH
```

- 2 Enter the following command in LD 60 to run the self-test.

```
SLFT L (for the entire loop)
SLFT L CH (for a specific channel)
```

Local loopback may also be performed on a per-channel basis without having to disable the entire loop. In this case, only the tested channel must be disabled. The procedure for this test is as follows:

- 3 Enter the following command in LD 60 to disable the 2.0 Mb DTI channel:

```
DISL L CH
```

- 4 Enter the following command in LD 60 to run the self-test:

```
SLFT L CH (for a specific channel)
```

For self-testing individual channels, follow the same procedure as above, but use the following commands:

DSCH C CH  
 SLFT C CH (specific channel)

—End—

The self-test failure codes for NTA10 2.0 Mb DTI are outlined in [Table 49 "Self-test failure codes for NTA10 2.0 Mb DTI" \(page 137\)](#).

**Table 49**  
**Self-test failure codes for NTA10 2.0 Mb DTI**

DTI009 loop ch	<p>DTI/PRI loop or channel failed hardware self-test. For DTI009 L M E, the output data is</p> <p>L = loop  M = N for NI microprocessor  M = C for CI microprocessor  E = error code for debug purposes.</p>
DTI009C ch	<p>DTI Card C or channel ch of Card C failed hardware self-test.</p> <p><b>Error codes for NI microprocessor (M = N):</b></p> <p>00 = NI self-test has finished.  01 = Undefined MESSOUT received.  02 = Problem with group 2 error handling (invalid level).  03 = NI to CI FIFO full (128 messages lost).  04 = CI-1 Micro failed to initialize on power-up.  05 = NI group 1 error handling - undefined condition found.  06 = Bad MESSOUT number 6 encountered.  07 = NI MESSOUT queue is full.  08 = NI MESSIN queue full.  09 = NI priority MESSIN queue is full.  10 = Bad MESSOUT number 10 encountered.  11 = TN = 0 read from regular queue.  12 = TN = 0 read from priority queue.  14 = Bad TN associated with MESSOUT number 14.  15 = Bad TN associated with MESSOUT number 15.  50 = External RAM in range 880h-8EFH failed (MESSIN queue).  51 = Internal RAM test failed.  52 = Pad RAM test failed.</p>

	<p>53 = External RAM test failed.</p> <p>54 = 8253 or DALLAS timer/counter test failed.</p> <p>55 = Slip counter test failed.</p> <p>56 = Loopback of TS16 frame 0 failed.</p> <p>57 = Loopback of non fas TSO failed.</p> <p>58 = Echo test to CI-1 micro failed.</p> <p>60 = A07 device failed.</p> <p>61 = Motorola DUART failed.</p> <p>62 = Multiframe loopback test failed.</p> <p>255 = Loss of NI FIFO synchronization (Stop byte = 0 not found).</p> <p><b>DTI009 error codes for CI microprocessor (M=C):</b></p> <p>03 = A complete message was not received from NI micro.</p> <p>128 = Message received by CI-1 through FIFO requested an undefined task.</p> <p>129 = Request for a timed two-state pulse was received, with the TN of TS 0 or 16.</p> <p>130 = An attempt was made to set the flag to invoke the pulse timer for TS 0.</p> <p>131 = A request for a task defined under MESSOUT 30 has been received with the TN of TS 0.</p> <p>132 = Attempt was made to enable outpulsing TS 0 or TS16.</p> <p>133 = A MESSOUT 31 has been received for TS 0 or TS 16 with the pulse hold time not = 0.</p> <p>134 = An attempt has been made to set the bit to invoke the pulse timer for TS 0 or TS 16.</p> <p>135 = A request for outpulsing was received, but outpulsing data was not downloaded.</p> <p>137 = A request for PPM counting was received, but the was not downloaded.</p> <p>138 = A MESSOUT 30 was received requesting a task to be performed for DTI TS 16 which is not allowed.</p>
<b>DTI009C ch</b>	<p><b>DTI009 error codes for CI microprocessor (M=C):</b></p> <p>139 = The 8031 on CHIP RAM failed self-test.</p> <p>140 = The TS 16 signaling RAM and/or the TS 16 pick up buffer failed self-test.</p> <p>141 = The CI-1 micro external RAM failed self-test.</p> <p>142 = Attempt was made to set/clear the flag used to invoke PPM pulse timing for DTI timeslot 0 or 16.</p>

DTI009C ch	<p>143 = CI-2 micro responded to echo request message but response was in error.</p> <p>144 = CI-2 micro failed to respond to request echo message.</p> <p>145 = The request for self-test received did not have the TN of TS 0.</p> <p>146 = The TN of MESSOUT 26 received was not that of TS 0.</p> <p>147 = The TN of MESSOUT 28 received was not that of TS 0.</p> <p>148 = The TN of MESSOUT 29 received was not that of TS 0.</p> <p>149 = Upon enabling the DTI card, the CI-1 was unable to write Frame 0, TS 16 with '0B'.</p> <p>150 = MESSOUT 26 was received with the PPM counting bit (abcd) all equal to zero.</p> <p>151 = MESSOUT 28 was received with the outpulsing bit (abcd) equal to zero.</p> <p>152 = CI-2 failed to respond to the CI-1 watch dog message.</p> <p>153 = The CI-2 failed to respond to five consecutive watchdog messages and is assumed to be out of service.</p> <p>154 = MESSOUT received requesting the lower nibble of MFAS pattern to be written with something other than '0000'.</p> <p>155 = MESSOUT received requesting '0000' to be written into an 'abcd' state.</p> <p>156 = MESSOUT received with a TN outside the range shelf 0, card 8-1, unit 3-0.</p> <p>DTI009 error codes for CI microprocessor (M=C):</p> <p>157 = CI-1, NI FIFO overflowed, and has been cleared. 128 message were lost.</p> <p>255 = TS16-DS30X FIFO overflowed, and has been cleared. 128 messages were lost.</p> <p>147 = The TN of MESSOUT 28 received was not that of TS 0.</p> <p>148 = The TN of MESSOUT 29 received was not that of TS 0.</p> <p>149 = Upon enabling the DTI card, the CI-1 was unable to write Frame 0, TS 16 with '0B'.</p> <p>150 = MESSOUT 26 was received with the PPM counting bit (abcd) all equal to zero.</p> <p>151 = MESSOUT 28 was received with the outpulsing bit (abcd) equal to zero.</p> <p>152 = CI-2 failed to respond to the CI-1 watch dog message.</p> <p>153 = The CI-2 failed to respond to five consecutive watchdog messages and is assumed to be out-of-service.</p>
------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<b>DTI009C ch</b>	<p>154 = MESSOUT received requesting the lower nibble of MFAS pattern to be written with something other than '0000'.</p> <p>155 = MESSOUT received requesting '0000' to be written into an 'abcd' state.</p> <p>156 = MESSOUT received with a TN outside the range shelf 0, card 8-1, unit 3-0.</p> <p><b>DTI009 error codes for CI microprocessor (M=C):</b></p> <p>157 = CI-1, NI FIFO overflowed, and has been cleared. 128 message were lost.</p> <p>255 = TS16-DS30X FIFO overflowed, and has been cleared. 128 messages were lost.</p>
-------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

### Near-end trunk loopback test

The near-end trunk loopback test checks the integrity of the 2.0 Mb link from the system to the far end. Either a per-loop or per-channel test may be run, with the far-end device placed in the respective mode of remote loopback. Refer to "Near-end trunk loopback" (page 141).

The commands for a near-end per-loop loopback test are shown in Table 50 "LD 60 - Perform a near-end per-loop loopback test." (page 140).

**Table 50**

#### LD 60 - Perform a near-end per-loop loopback test.

Command	Description
Disable the 2.0 Mb DTI card.	DISL L
Run the loopback test.	RMST L


The commands for a near-end per-channel loopback test are shown in Table 51 "LD 6o - Perform a near-end per-channel loopback test." (page 140).

**Table 51**

#### LD 6o - Perform a near-end per-channel loopback test.

Command	Description
Disable the 2.0 Mb DTI channel.	DSCH L CH
Run the loopback test.	RMST L CH

**Near-end trunk loopback**

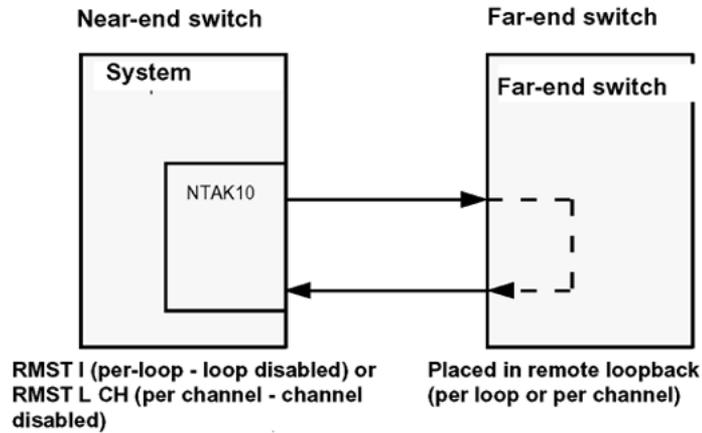

**Far-end trunk loopback test**

The far-end trunk loopback test checks the integrity of the 2.0 Mb link from the far end to the carrier interface of the 2.0 Mb DTI (it does not test the 2.0 Mb DTI card). Either a per-loop or per-channel test may be run, with the near-end device placed in the respective mode of remote loopback. Refer to "Far-end trunk loopback" (page 142).

The commands for a near-end per-loop loopback test are shown in Table 52 "LD 60 - Perform a near-end per-channel loopback test." (page 141).

**Table 52**  
**LD 60 - Perform a near-end per-channel loopback test.**


Command	Description
Disable the 2.0 Mb DTI card.	DISL L
Place the 2.0 Mb DTI card in remote per-loop loopback.	RLBK L

The commands for a far-end per-loop loopback test are shown in Table 53 "LD 60 - Perform a far-end per-channel loopback test." (page 141).

**Table 53**  
**LD 60 - Perform a far-end per-channel loopback test.**

Command	Description
Disable the 2.0 Mb DTI card.	DSCH L CH
Place the 2.0 Mb DTI card in remote per-loop loopback.	RLBK L CH

### Far-end trunk loopback

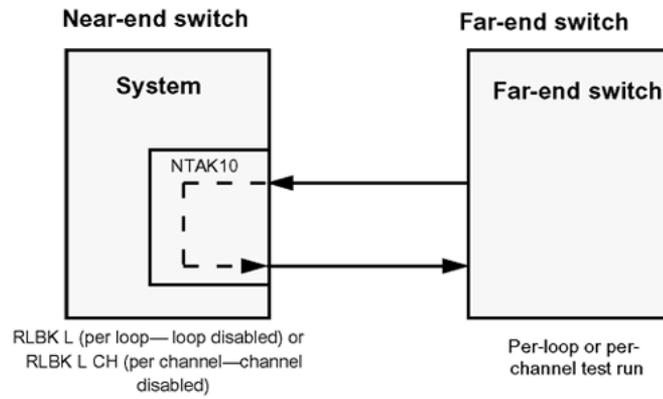

---

## 2.0 Mb PRI maintenance

---

### Contents

This section contains information on the following topics:

- "Overview" (page 143)
- "Enable the 2.0 Mb PRI after installation" (page 143)
- "Disable the 2.0 Mb PRI before removal" (page 145)
- "Monitor system PRI operation" (page 146)
- "System PRI maintenance tools" (page 157)

### Overview

This chapter provides an overview of the maintenance tools available for 2.0 Mb PRI or ISL features:

- Commands used to maintain PRI, DDCH, DCHI and clock controller hardware.
- Tests for 2.0 Mb PRI operation.
- Error detection for 2.0 Mb PRI, including the various thresholds found in the 2.0 Mb PRI loop timers in LD 73.

### Enable the 2.0 Mb PRI after installation

To enable an NTA79 or NTB50 PRI circuit pack, complete one of the following procedures.

#### Procedure 19

#### Enabling the NTA79 PRI

Step	Action
1	Enter the following command in LD 60 to software enable all 2.0 Mb PRI cards:  <code>ENLL N</code>

The DCHI enables automatically.

- 2 Enter the following command in LD 60 to software enable the clock controller:

```
ENL CC 0
```

- 3 Enter the following command to enable clock tracking on primary digital loop:

```
TRCK PCK
```

Within about 30 seconds, the D-channel layer 3 should be established.

- 4 You can request the current status of the D-channel by issuing the command **STAT DCH**. The system should respond **DCH N EST** in LD 96 (meaning that the D-channel is established and operational).

---

—End—

---

#### Procedure 20

#### Enabling the NTBK50 PRI

Step	Action
1	If using the NTBK51 DDCH daughterboard, enter the following command in LD 96 to enable the DDCH:  <pre>ENL MSDL X</pre>
2	Enter the following command in LD 60 to software enable all 2.0 Mb PRI cards:  <pre>ENLL N</pre> The DCHI enables automatically.
3	Enter the following command in LD 60 to software enable the clock controller:  <pre>ENL CC 0</pre>
4	Enter the following command to enable clock tracking on primary digital loop:  <pre>TRCK PCK</pre> Within about 30, seconds the D-channel layer 3 should be established.

- 5 You can request the current status of the D-channel by issuing the command `STAT DCH`. The system should respond `DCH N EST` in LD 96 (meaning that the D-channel is established and operational).

---

—End—

---

## Disable the 2.0 Mb PRI before removal

To disable a PRI circuit pack, follow the appropriate procedure below.

### Procedure 21

#### Disabling the NTA79 PRI

Step	Action
1	Enter the following command in LD 96 to software disable the DCHI: <code>DIS DCH N</code> Where N is the D-channel device number.
2	Enter the following command in LD 60 to software disable the clock controller: <code>DIS CC 0</code>
3	Enter the following command in LD 60 to software disable the PRI card: <code>DISL N</code> Where N is the PRI card number.

---

—End—

---

### Procedure 22

#### Disabling the NTB50 PRI

Step	Action
1	Enter the following command in LD 96 to software disable the DCHI: <code>DIS DCH N</code> Where N is the D-channel device number.
2	If using the NTB51 DDCH daughterboard, enter the following command in LD 96: <code>DIS MSDL N</code>

- 3 Enter the following command in LD 60 to software disable the clock controller:

```
DIS CC 0
```

- 4 Enter the following command in LD 60 to software disable the PRI card:

```
DISL N
```

Where N is the PRI card number.

---

—End—

---

## Monitor system PRI operation

### Maintenance messages

Service messages report on near-end and far-end switch status. Both service and service acknowledge messages are supported on PRI B-channels and ISL channels. These messages are used for backup D-channel and D-channel sanity polling. The status can be in-service and out-of-service.

Service and service acknowledge messages for B-channels and ISL channels are supported between:

- system to system: ISL and PRI
- system to CO: PRI only

The status of these messages is reported by the service and service acknowledge messages for B-channels and ISL channels:

- in-service
- maintenance
- out-of-service

Near-end and far-end subcategories are defined for each maintenance status. See [Table 54 "Maintenance message status" \(page 146\)](#) for possible combinations of near-end and far-end status, and channel capability for each status. When the status of the near-end and far end does not match, the more severe maintenance status takes effect.

**Table 54**  
**Maintenance message status**

Near-end status	Far-end status	B channel capability
In-service	In-service	both incoming and outgoing calls allowed

Near-end status	Far-end status	B channel capability
In-service	Maintenance	only incoming calls allowed
In-service	Out-of-service	not allowed to use
Maintenance	N/A	not allowed to use
Out-of-service	N/A	not allowed to use

### Service message function

Service messages are used to monitor the following:

- D-channel establishment
- D-channel sanity polling
- B-channel or ISL status change
- Channel status audit

### D-channel establishment

When the D-channel establishes, the B-channel status is supported by sending service messages for each B-channel controlled by a D-channel. This enables the far end to synchronize its channel states. The service messages are sent when the system brings up the D-channel automatically or an administrator brings up the D-channel manually by using LD 96.

### D-channel sanity polling

If a D-channel has been idle for 30 seconds, a service message is sent to poll the link sanity. The service message is sent whether or not the near-end is configured as master or slave.

### B-channel status change

Whenever there is a status change for a B-channel or an ISL channel, the new status is reported to the far end in a service message. Status change can occur through service change or maintenance operations, such as the addition or deletion of a channel in LD 14, or the disabling of the associated loop, shelf, card or unit in LD 30, LD 32, LD 36, LD 41 or LD 60.

### Channel status audit

LD 30 is enhanced to allow channel status audit to be initiated. The channels associated with each D-channel are examined, and their status is reported to the far end by service messages.

### Service message commands

Activate the service messages in LD 96 on a per-D-channel basis. The commands are:

- ENL SERV N: Turns on the support of service and service acknowledge messages for DCH link N. The command should only be executed when the specified D-channel is in the disabled state.
- DIS SERV N: Turns off the support of service and service acknowledge messages for DCH link N.
- STAT SERV (N): Displays the current service and service acknowledge message SERV setting for individual DDCH N or for DCHIs.

Two new statuses are added for maintenance messages: FE MbSY = Far-end maintenance and FE DSBL = Far end disabled.

### 2.0 Mb PRI error detection

The PRI categorizes errors and alarm conditions into two main groups, Group 1 and Group 2 errors.

#### Group 1 errors

These are real-time calculated error-rate thresholds. Group 1 errors can include:


- Bipolar Violations (BPV)
- Frame Bit Errors (FBER)
- CRC-4 Word Errors (CRC)
- Controlled Frame Slips

#### Bipolar Violations (BPV)

In an Alternate Mark Inversion (AMI) bipolar pulse stream, pulses alternate in polarity. A bipolar violation has occurred when two pulses of the same polarity are received in succession, as shown in [Figure 24 "Bipolar violations" \(page 149\)](#). This might be caused by an electrical disturbance such as noise, a low signal level or a faulty repeater. Bipolar violations indicate the integrity of the local span from the system to the first repeater.

The PRI card, following the CEPT PCM-30, uses a zero code suppression technique known as HDB3, which introduces intentional bipolar violations onto the carrier. The bipolar violations are recognized by the receiver and disregarded as bipolar violation errors.

**Figure 24**  
**Bipolar violations**

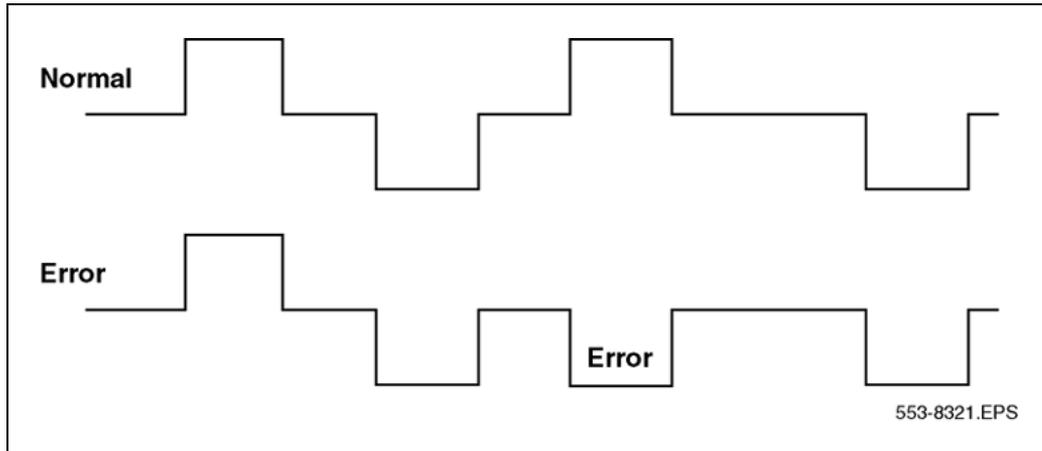

### Frame bit errors

The NTAK79/NTBK50 PRI CEPT PCM-30 stream is structured into a frame of 32 8-bit timeslots. To maintain alignment of this frame structure, alternate timeslot zeros have a specific frame alignment pattern (X0011011).

A frame bit error is acknowledged when any bit in the received pattern is in error. This error rate indicates the integrity of the end-to-end span.

### CRC-4 word errors

When operating in the CRC-4 multiframe format (CRC), frames are bundled into groups of 16. This format includes a specific multiframe alignment pattern in bit 0 of every even frame's timeslot 0 (001011XX).

Each odd frame timeslot 0 includes a CRC-4 cyclic redundancy checksum of the previous 8 frames (sub-multiframe). This transmitted checksum is compared against a calculated checksum at the receiver. If the two checksums do not match, a CRC-4 word error is indicated.

Group I error rates are processed on the PRI card based on software downloadable parameters N1 and N2 (for each BPV, CRC, and FBER). The values for N1 are scaled on the card as follows:

- BPV = N1•16
- CRC = N1•4
- FBER = N1•1

N2 values are not scaled. These parameters can be set in LD 73 on a per-card basis, or they can be left at their default values.

Parameters N1 and N2 provide for the following error rate thresholds reported to the system:

- **Severely errored second:** When the number of occurrences of the error exceeds the value of N1 in the previous second. This error is reported and counted (LCNT), but no action is taken by the system.
- **Unavailable condition:** This is reported when 10 severely errored seconds are received in 10 consecutive seconds. This is equivalent to an error rate worse than  $10^{-3}$  with the default value. When this condition is reached, the 2.0 Mb PRI is put into an out-of-service condition until the Group I OOS guard timer expires and the error condition has ceased or improved.
- **No new call condition:** When the number of occurrences of the error exceeds the value of  $(10 \times N2)$  in the previous minute. This corresponds to an error rate of  $10^{-3}$  to  $10^{-5}$  using the default N2 value. When this condition is reported, the system records the error (LCNT) and places the PRI card into a "no new call" condition, with all idle channels set to MbSY. The card automatically returns to normal state when the condition improves after the Group I NNC guard timer expires.
- **Maintenance condition:** This condition exists when the number of occurrences of the error exceeds the value of N2 in the previous minute. This corresponds to an error rate between  $10^{-5}$  and  $10^{-6}$  based on the N2 default values. When this condition is reported, the system records the error (LCNT) and places the 2.0 Mb PRI card into a maintenance alarm state. This state has no effect on call processing, it simply indicates line degradation. The card automatically returns to normal state when the condition improves after the Group I MAINT guard timer expires.

There is no error report for the error rates below  $10^{-6}$  ( $10 \times N2$ ) as such rates are considered satisfactory.

### Program group I thresholds

To set the LD 73 Group I thresholds, use the following commands.

#### LD 73 - Program group I thresholds

Prompt	Response	Description
REQ	CHG	Request a Change
TYPE	PRI2	Primary Rate Interface 2
FEAT	LPTI	Loop Timer
...		
BPV	N1 N2	Bipolar Violation thresholds Default: 128 122
CRC	N1 N2	Cyclic Redundancy Check thresholds Default: 201 97

Prompt	Response	Description
FBER	N1 N2	Frame Bit Errors Default: 28 1
...		
OOS1	1 - 60 M	Out-of-Service Threshold time Default: 15
NNC1	1 - 60 M	No New Calls Threshold time Default: 15
MNT1	1 - 60 M	Maintenance Threshold time Default: 15

### Frame slips

Digital signals must have accurate clock synchronization for data to be interleaved into, or extracted from, the appropriate timeslot during multiplexing and demultiplexing operations. A frame slip is defined (for 2.0 Mb links) as the repetition or deletion of the 256 data bits of a CEPT frame due to a sufficiently large discrepancy in the read and write rates at the buffer (clocks are not operating at exactly the same speed).

When data bits write (add) to a buffer at a slightly *higher* rate than they read (empty), sooner or later the buffer overflows. This is called slip-frame deletion.

In the opposite situation, when data bits write (add) to a buffer at a slightly *lower* rate than they read (empty), eventually the buffer runs dry or underflows. This is also called slip-frame repetition.

A 2.0 Mb PRI contains a buffer large enough to contain two full frames (256 x 2 = 512 bits), and is normally kept half full (1 frame). See [Table 55 "Performance impact of one slip" \(page 151\)](#) for the impact of one slip on various types of data.

All the degradations shown in [Table 55 "Performance impact of one slip" \(page 151\)](#) can be controlled or avoided by proper clock (network) synchronization.

**Table 55**  
**Performance impact of one slip**

Service	Potential impact
Encrypted Text	Encryption key must be resent.
Video	Freeze frame for several seconds. Loud pop on audio.
Digital Data	Deletion or repetition of Data. Possible Misframe.
Facsimile	Deletion of 4-8 scan lines. Drop Call.

Service	Potential impact
Voice Band Data	Transmission Errors for 0.01 to 2 s. Drop Call.
Voice	Possible Click

Clock synchronization can be either tracking, on the primary or secondary reference clock, or non-tracking (free-run). In LD 73 (prompts PREF and SREF), the 2.0 Mb PRI which supports the clock controller is defined as the primary clock reference. Another 2.0 Mb PRI (or DTI) may be defined as the secondary clock reference. The clock controller synchronizes from the incoming bit stream of the primary or secondary references. The clock controller in turn supplies a synchronized reference for the rest of the system, including all 2.0 Mb PRIs and DTIs.

The 2.0 Mb PRI card detects and reports frame slips (repetitions and deletions) to the system. The count of slips is recorded (LCNT), printed out, and cleared at each midnight routine.

Frame slips have two alarm thresholds as defined in LD 73. They are as follows:

- **Slip — out-of-service threshold.** When this threshold (variable count versus variable time) is reached, the PRI card is placed in an out-of-service state. The card automatically returns to a normal state if the slip rate improves after the Group I OOS guard timer expires.
- **Slip — maintenance threshold.** When this threshold is reached, the PRI card is placed in a maintenance state that has no impact on call processing. The maintenance state is simply an indication that a degraded condition exists. The card automatically returns to a normal state if the slip rate improves after the Group I MAINT guard timer expires.

### Define slip thresholds

To define the slip thresholds, use the following commands in LD 73. Times range from 1M to 24H (one 1 minute to 24 hours). Counts are 1 to 255.

#### LD 73 - Define slip thresholds

Prompt	Response	Description
REQ	CHG	Request a Change.
TYPE	PRI2	Primary Rate Interface 2.
FEAT	LPTI	Loop Timer.
	5 24H	This entry establishes a maintenance threshold of 5 slips in 24 hours.
SLIP	20 1H	This entry establishes an OOS threshold of 20H [32] slips in 1 hour.

## Group 2 errors

Group 2 errors are event-based alarms that can be separated into Red (local) and Yellow (far-end) alarms.

### Yellow (far-end) alarms

A Yellow alarm on the 2.0 Mb PRI card indicates that the card is receiving an alarm indication from the far end.

This type of alarm may be received in two ways:

1. Remote Alarm Indication (RAI) — Bit 3 of non-FAS frame set.
2. Alarm Indication Signal (AIS) — All 1s on the carrier.

Since the 2.0 Mb PRI is receiving a Yellow alarm signal, that indicates that there is a carrier connection, but the far end is not ready. It is possible, however, that the carrier connection is one-way only (2.0 Mb PRI receiving).

When the 2.0 Mb PRI receives a Yellow alarm signal, all channels are placed in a maintenance busy mode (MBSY). Group 2 Yellow alarms are recorded (LCNT) on each occurrence, but the card is not placed into an out-of-service state.

### Red (local) alarms

A Red alarm on the PRI card indicates that the card is having problems synchronizing with the incoming bit stream.

This type of alarm may be caused by the following:

- Loss of Signal (LOS)
- Loss of Frame Alignment (LFAS)
- Loss of CRC-4 Multiframe Alignment (LMAS)

When the 2.0 Mb PRI is in a Red alarm state, RAI is transmitted to the far end.

For both Group 2 Red and Yellow alarm states, action is taken after the condition has persisted for a downloaded persistence (PERS) threshold. The parameter is set in LD 73 in multiples of 2 msec, with  $2 \times 50 = 100$  msec as the default.

For Group 2 Red alarm conditions, there are four definable time thresholds that can be set in LD 73 on a per-loop basis. The first parameter sets an aggregate time in multiples of 128 msec (default 20 = 2.5 sec). The next four parameters provide time thresholds for MAINT, NNDC, NNC, and OOS.

For example, if the total cumulative time that an error has been present reaches the aggregate time (2.5 sec default) in less than the time set in OOS, the card is put into an out-of-service state. If it took more than the preset time for the error condition to register, the card could be put into NNDC, NNC, or MAINT states. The card remains in the alarm condition until the error has improved and after the Group 2 guard timers expire.

### Define group 2 error thresholds

You can define Group 2 error thresholds in LD 73. Only the highest priority Group 2 alarm condition is active at a time. The order of priority (from highest to lowest) is: LOS, AIS, LFAS, LMAS, RAI.

#### LD 73 - Define group 2 error thresholds

Prompt	Response	Description
REQ	NEW	New
TYPE	DTI2	2.0 Mb/s DTI data block
FEAT	LPTI	Loop Timer
...		
GP2	20 100s 12s 12s 4s	<p>where</p> <p>20 = Error count value  100s = Maintenance threshold  12s = NNDC threshold  12s = NNC threshold  4s = OOS threshold</p> <p>(Aggregate count default [20x128ms = 2.5sec])</p>
...		
OOS2	1-(15)-255s	Out-of-Service threshold
NNC2	1-(15)-255s	No New Calls threshold
MNT2	1-(15)-255s	Maintenance Threshold
PERS	50	Alarm persistence timer (in multiples of 2ms)
CLRS	50	Clearance persistence timer (in multiples of 2ms)
OOSC	1-(5)-255	Out of service count limit. After this number is reached, the card does not auto-enable

### Alarm threshold recommendations for digital trunks

If a digital trunk is present in an IP expansion cabinet/Media Gateway, link outages due to data network degradation between a main cabinet/Call Server and an expansion cabinet/Media Gateway cause alarms on the far

end of the digital trunk. If link outages are frequent, you can increase alarm thresholds on the far end to prevent the trunk from being placed in a state that requires manual intervention to recover.

### NTAK79 faceplate LEDs

The NTA79 circuit card has a total of seven faceplate LEDs. Five of the LEDs are directly associated with the operation of the Primary Rate interface (PRI). The remaining two LEDs are associated with the on-board clock controller and the on-board D-channel interface (DCHI). Refer to [Table 56 "NTAK79 faceplate LEDs" \(page 155\)](#).

**Table 56**  
**NTAK79 faceplate LEDs**

LED	State	Definition
OOS	On (Red)	The NTA79 2.0 Mb PRI circuit card is either disabled or out-of-service.
	Off	The NTA79 2.0 Mb PRI is not in a disabled state.
ACT	On (Green)	The NTA79 2.0 Mb PRI circuit card is in an active state.
	Off	The NTA79 2.0 Mb PRI is in a disabled state. The OOS LED is Red.
RED	On (Red)	A Red alarm state has been detected. This represents a local alarm state of Loss of Carrier (LOS), Loss of Frame (LFAS) or Loss of CRC Multiframe (LMAS).
Red	Off	No Red (local) alarm.
YEL	On (Yellow)	A Yellow alarm state has been detected. This represents a remote alarm indication from the far end. The alarm may be either Alarm Indication (AIS) or Remote Alarm (RAI).
	Off	No Yellow (remote) alarm.
LBK	On (Green)	NTA79 2.0 Mb PRI is in loopback mode.
	Off	NTA79 2.0 Mb PRI is not in loopback mode
CC	On (Red)	The clock controller is switched on and software disabled.
	On (Green)	The clock controller is enabled and either locked to a reference or in free-run mode.
	Flashing (Green)	The clock controller is enabled and is locking onto a reference.
	Off	The clock controller is switched off (by switch SW3).

LED	State	Definition
DCH	On (Red)	DCHI is switched on and disabled.
	On (Green)	DCHI is switched on and enabled, but not necessarily established.
	Off	DCHI is switched off (by switch SW1).

### NTBK50 faceplate LEDs

The NTBK50 circuit card has a total of seven faceplate LEDs. Five of the LEDs are directly associated with the operation of the Downloadable D-channel handler and D-channel interface. The remaining two LEDs are associated with the clock controller. Refer to [Table 57 "NTBK50 faceplate LEDs" \(page 156\)](#).

**Table 57**  
**NTBK50 faceplate LEDs**

LED	State	Definition
OOS	On (Red)	The NTBK50 2.0 Mb PRI circuit card is either disabled or out-of-service. Also, the state of the card after power-up, completion of self-test, and exiting remote loopback.
	Off	NTBK50 is not in a disabled state.
ACT	On (Green)	NTBK50 PRI circuit card is in an active state.
	Off	NTBK50 2.0 Mb PRI is in a disabled state. The out-of-service LED is Red.
RED	On (Red)	A Red alarm state has been detected. This represents a local alarm state of Loss of Carrier (LOS), Loss of Frame (LFAS), or Loss of CRC Multiframe (LMAS).
	Off	No Red (local) alarm.
YEL	On (Yellow)	A Yellow alarm state has been detected. This represents a remote alarm indication from the far end. The alarm may be either Alarm Indication (AIS) or Remote Alarm (RAI).
	Off	No Yellow (remote) alarm.
LBK	On (Green)	NTBK50 2.0 Mb PRI is in loopback mode.
	Off	NTBK50 2.0 Mb PRI is not in loopback mode.
CC	On (Red)	The clock controller is software-disabled.
	On (Green)	The clock controller is enabled and either locked to a reference or in free-run mode.

LED	State	Definition
DCH	Flashing (Green)	NTAK20 is equipped and attempting to lock (tracking mode) to a reference. If the LED flashes continuously over an extended period of time, check the CC STAT in LD 60. If the CC is tracking, this may be an acceptable state. Check for slips and related clock controller error conditions. If none exist, then this state is acceptable, and the flashing is identifying jitter on the reference.
	Off	The clock controller is not equipped.
	On (Red)	DCH is disabled.
	On (Green)	DCH is enabled, but not necessarily established.
	Off	DCH is not equipped.

## System PRI maintenance tools

**Table 58**  
**2.0 Mb PRI commands (LD 60)**

Command	Action
DISI L	Disable 2.0 Mb PRI when idle.
DISL L	Force disable PRI.
ENLL L	Enable PRI.
LCNT (L)	List alarm counters.
RCNT (L)	Reset alarm counters and clear alarms.
SLFT (L)	Do 2.0 Mb PRI self-test (2.0 Mb PRI must be disabled first).
STAT (L)	List 2.0 Mb PRI status.
RLBK L (C)	Enable remote loopback.
DLBK L (C)	Disable remote loopback.
RMST L (C)	Perform remote loopback.

PRI status and error conditions are reported in the Primary Rate Interface messages in *Software Input Output Reference - System Messages (NN43001-712)*.

### DCHI commands

D-channel commands are found in LD 96. [Table 59 "DCHI commands" \(page 158\)](#) provides a quick-reference list of D-channel commands.

**Table 59**  
**DCHI commands**

Command	Action
DIS DCHI N	Disable DCHI port N.
ENL DCHI N	Enable DCHI port N.
EST DCH N	Establish D-channel N.
PLOG DCHI N	Print D-channel statistics log N.
RLS DCH N	Release D-channel N.
SDCH DCH N	Release a D-channel and switch D-channels.
RST DCH N	Reset D-channel N.
STAT DCH (N)	Print D-channel status (link status).
TEST 100/101	DCH tests.
STAT SERV	Print the current service and service acknowledge message for DCHI N.
ENL SERV N	Enable service messages for DCHI N.
DIS SERV N	Disable service messages for DCHI N.

D-channel status and error conditions are reported as DCH messages. These messages can be found in the *Software Input Output Reference - Maintenance (NN43001-711)*.

### DDCH commands

Downloadable D-channel commands are found in LD 96. [Table 60 "DDCH commands" \(page 158\)](#) provides a quick-reference list of D-channel commands with minor modification.

**Table 60**  
**DDCH commands**

Command	Action
DIS MSDL X (ALL)	Disable DCHI card X.
ENL MSDL X (FDL, ALL)	Enable DCHI card X, with or without Force Download.
RST MSDL X	Reset MSDL card X.
STAT MSDL X (X (full))	Get MSDL status X, or a "FULL STATUS".
SLFT MSDL X	Execute a self-test on MSDL card X.
DIS LLB X	Disable local loop back on MSDL DCH X.
DIS RLB X	Disable remote loop back on MSDL DCH X.
DIS TEST X	Disable Test mode on MSDL DCH X.

Command	Action
ENL LLB X	Enable local loop on MSDL DCH X.
ENL RLB X	Enable remote loop on MSDL DCH X.
ENL TEST X	Enable Test mode on MSDL DCH X.
PCON DCH X	Print configuration parameters on MSDL DCH X.
PMES DCH X	Print incoming layer 3 messages on MSDL DCH X.
PTRF DCH X	Print traffic report on MSDL DCH X.
TEST LLB X	Start local loop back test on MSDL DCH X.
TEST RLB X	Start remote loop back test on MSDL DCH X.

**Note:** "X" represents the D-channel device number.

D-channel status and error conditions are reported as DCH messages. These messages can be found in the *Software Input Output Reference - Maintenance (NN43001-711)*.

### Clock controller commands

Clock controller (CC) commands are accessed in LD 60. [Table 61 "Clock controller commands" \(page 159\)](#) provides a quick-reference list of clock controller commands.

**Table 61**  
**Clock controller commands**

Command	Action
DIS CC X	Disable clock controller.
ENL CC X	Enable clock controller.
SSCK X	Status of clock controller.
TRCK XXX N	Set clock controller tracking where XXX can be: PCK — track primary clock reference source SCLK — track secondary clock reference source FRUN — free run mode

### NTAK79/NTBK50 power on self-test

When power is applied to the NTAK79/NTBK50 2.0 Mb PRI circuit card, the card performs a power-on self-test. The self-tests verify the operation of most of the on-board hardware.

If all the self-tests pass, the upper five LEDs blink simultaneously three times. If any of the self-tests fail, the LEDs do not blink. Only the OOS LED illuminates. The corresponding error code is then printed on the TTY.

### Self-test error codes

Table 62 "Self-test error codes" (page 160) lists the self-test failure codes for the NTAK79/NTBK50 2.0 Mb PRI. These codes can be returned on card power-up in the form "DTA105 L X" (where X is the failure code), or during a self-test procedure in LD 60 as "DTI009 L X" (where X is the error code).

Failure codes 1-14 are hardware failures on the NTAK79/NTBK50 card. Codes 15-16 might be due to carrier span problems or lack of loopback activation at the far end.

**Table 62**  
**Self-test error codes**

Failure code	Associated error
0	Self-test passed.
1	Self-test general failure.
2	LCAs failed to program correctly.
3	8031 code checksum failure.
4	8031 internal RAM failure.
5	8031 external RAM failure.
6	PAD RAM failure.
7	AO7 signaling interface failure.
8	UART (card LAN) failure.
9	CEPT transceiver failure.
10	Line interface failure.
11	Receiver framing failure.
12	Transmit/receive (inter)national bit failure.
13	Yellow (remote) alarm failure.
14	PCM path integrity failure.
15	Loop remote loopback failure.
16	Channel remote loopback failure.

**Procedure 23**  
**Self-testing the 2.0 Mb PRI**

**Step Action**

*This self-test can be run manually on a per-loop or per-channel basis using LD 60. The DCHI/DDCH and 2.0 Mb PRI must be disabled before performing the self-test.*

*To self-test the entire loop:*

- 1 Enter the following command in LD 96 to disable the DCHI/DDCH:

```
DIS DCH N
```

- 2 Enter the following command in LD 60 to disable the 2.0 Mb PRI card and run the self-test:

```
DISL L
SLFT L (entire loop)
```

---

—End—

---

To self-test a specific channel:

---

Step	Action
------	--------

---

- 1 Enter the following command in LD 60 to disable the idle channel:

```
DSCH L CH
```

- 2 Enter the following command in LD 60 to run the self-test on the channel:

```
SLFT L CH
```

---

—End—

---

## 2.0 Mb PRI automatic loop test

This procedure is not recommended since it causes a Yellow alarm at the far end and can cause some B-channels to not re-enable once the test is completed. Therefore, set the ATLP command to 0.

The automatic loop test checks the same functions as the self-test. Unlike the self-test, it can be run automatically as part of the midnight routines.

## 2.0 Mb PRI automatic loop test

With ATLP command set to one and if all 30 channels are idle at midnight, the system software disables the card and performs a self-test on all channels. This causes a Yellow alarm to be generated to the far end. If any one of the 30 channels are busy at midnight, the software randomly disables one idle channel, and checks it while the card is enabled.

With the ATLP command set to zero, only one channel is tested. The channel tested is randomly selected by software; it cannot be specified.

Enter the following command in LD 60 to perform the automatic loop test as part of midnight routines:

```
ATLP 1 or 0
```

## Link diagnostic and remote loop back tests

The remote loopback and the link diagnostic test are performed manually on a per-channel or per-loop (or card) basis.


### Link diagnostic test

The link diagnostic test, also called the far-end loopback test, does not test the system 2.0 Mb PRI. It puts the 2.0 Mb PRI in loopback mode so a remote loopback test can be performed on equipment at the far end. Refer to [Figure 25 "2.0 Mb PRI link diagnostic \(far-end loopback\) test" \(page 162\)](#).

The 2.0 Mb PRI channel or loop (card) tested must be disabled.

**Figure 25**

### 2.0 Mb PRI link diagnostic (far-end loopback) test

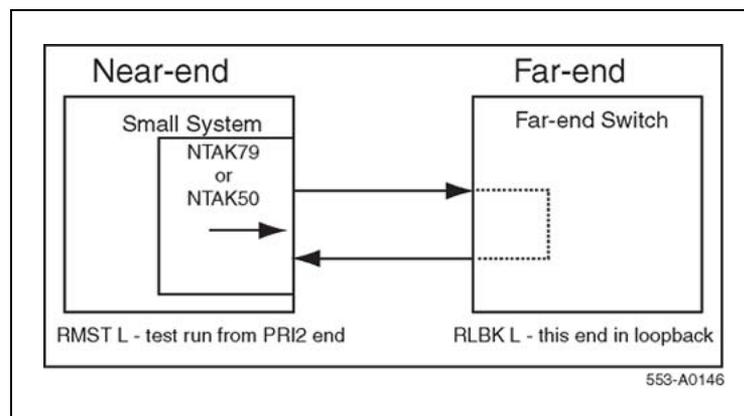

### Procedure 24

#### Running the link diagnostic test

Step	Action
------	--------

*To run the link diagnostic test on the system:*

- 1 Call a technician at the far end. Ask for loopback mode at that facility.
- 2 When loopback mode at the far end is confirmed:
  - a. Enter the following command in LD 96 to disable the DCHI/DDCH:

```
DIS DCH N
```

- b. Enter the following command in LD 60 to disable the 2.0 Mb PRI card and run loopback test:

```
DISL L
RMST L or RMST L C
```


—End—

## Remote loopback test

The remote loopback test, also called the near-end loopback test, checks the integrity of the 2.0 Mb PRI from the system to the far end. The far end must be in loopback mode before this test can be performed. Refer to [Figure 26 "2.0 Mb PRI remote loopback test" \(page 163\)](#).

The 2.0 Mb PRI channel or loop (card) tested must be disabled.

**Figure 26**  
**2.0 Mb PRI remote loopback test**

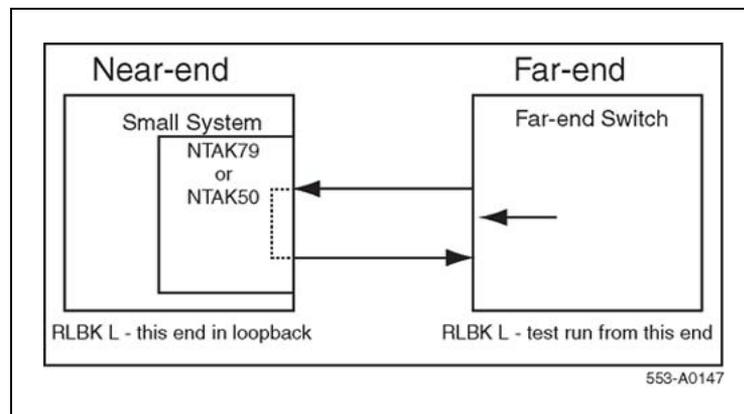

## Coordinating the remote loopback tests

When a technician at the far end asks for loopback mode on the system, enter the following command in LD 96 to disable the DCHI/DDCH:

```
DIS DCH N
```

Enter the following command in LD 60 to disable the 2.0 Mb PRI card and activate loopback mode:

```
DISL L  
RLBK L or RLBK L C
```



---

## 2.0 Mb ISL maintenance

---

### Contents

This section contains information on the following topics:

"Overview" (page 165)

"ISL maintenance" (page 174)

### Overview

This chapter provides a DCHI reference list of D-channel commands, a technical document reference for maintenance messages, and maintenance testing information.

This chapter provides the information required to implement ISL on the system including:

- hardware and software installation
- implementation of components needed to provide basic call service

ISDN features are treated separately in the chapter devoted to ISDN feature implementation.

This chapter assumes that ESN implementation is already in place. It also assumes that the reader has a basic understanding of NARS and CDP.

Two modes of ISL are available: shared and dedicated. This chapter covers ISL installation in dedicated mode using dedicated and leased lines. Shared mode installations are done according to the instructions supplied for PRI, with the noted exceptions.

### ISL hardware requirements


ISL, regardless of the operation mode, uses analogue or digital TIE lines as B-channels.

### ISL in shared mode

In shared mode, PRI hardware is required in addition to the existing TIE lines interface cards.

- NT8D15 Analogue trunk card(s)
- NTAK02 SDI/DCH, NTAK10 2.0 Mb DTI, NTAK79 2.0 Mb PRI, or NTBK50 2.0 Mb PRI card(s)

### ISL in shared mode

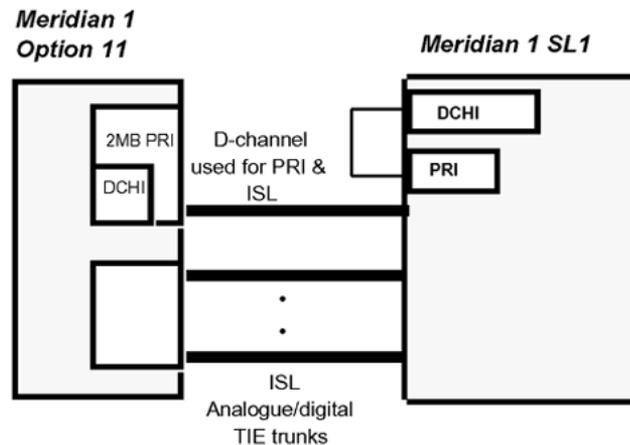


### ISL in dedicated mode using leased line

The following hardware is required:

- NTAK02 SDI/DCH D-channel handler interface
- A modem capable of the following: (such as Ventel 2400-33 or 2400 Plus II)
  - minimum of 2400 baud
  - synchronous operation
  - must support leased line (also known as private line or point-to-point) operation
- NTAK19BA 4-Port SDI Cable

### ISL in dedicated mode using leased line

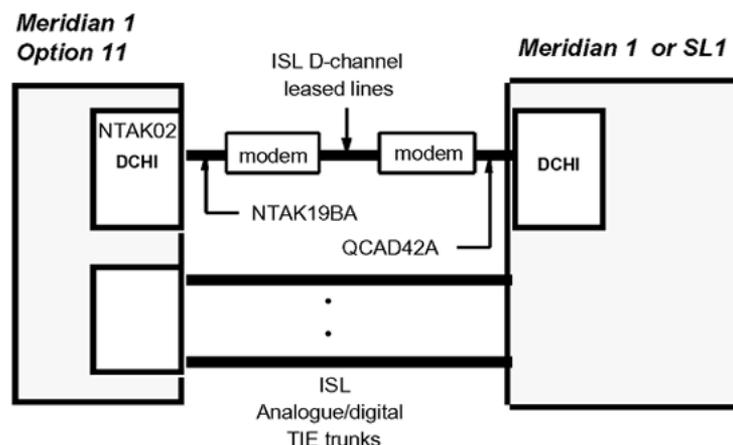


### ISL in dedicated mode using dial-up modem

The requirements are as follows:

- NTAK02 SDI/DCH D-channel handler interface.
- Modems such as the Ventel 2400, Hayes 2400 (the Hayes Smartmodem 2400 cannot be used on leased lines) or Gandalf 2400 that can support 2 or 4-wire leased line operation. 4-wire operation must be specified when ordering. Otherwise, modems are factory shipped for 2-wire operation. Modems capable of the following:
  - autodial capability
  - minimum of 2400 baud
  - synchronous operation
  - programmable so that one modem originates the call while the other auto-answers
- NTAK19BA 4-port SDI cable.
- NT8D09 500 set line card.

**Figure 27**  
ISL in dedicated mode using dial-up modem

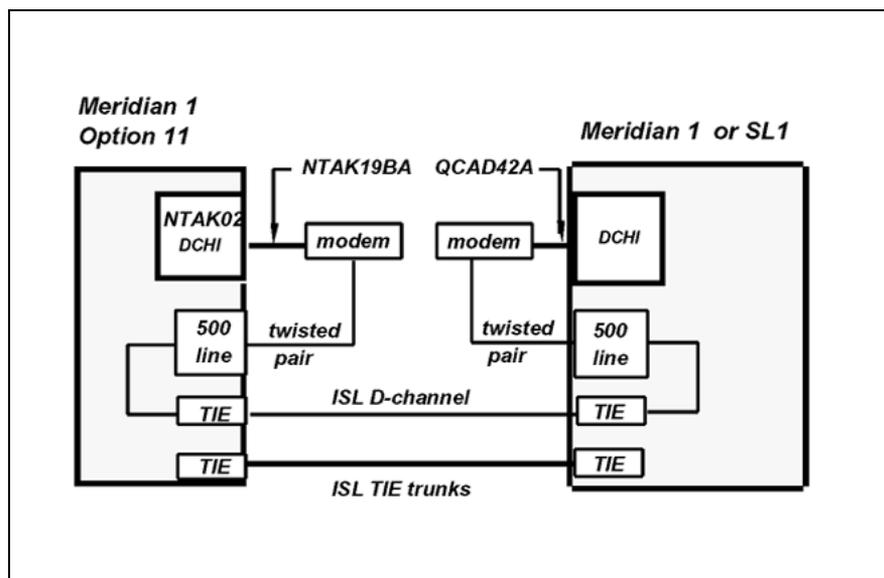

## ISL hardware installation

### Shared mode

The hardware installation is identical to the PRI installation, with the addition of analogue or digital TIE trunks (or both).

### Dedicated mode

#### Procedure 25

#### Installing the NTA02

Step	Action
------	--------

*The NTA02 connects to the modem through the NTA02 4-port cable. Only ports 1 and 3 are available for use as DCHIs.*

- 1 Set option switches/jumpers on the DCHI card, as shown in [Table 63 "NTA02 switch settings"](#) (page 169) and [Table 64 "NTA02 jumper settings"](#) (page 169), for mode of operation that is, RS232 or RS422 and DTE or DCE.
- 2 Install the NTA02 in any spare slot 1-9 of the Option 11C main cabinet or slots 11-14 of the Media Gateway.
- 3 Install the NTA02 four port cable on the 50-pin Amphenol connector associated with the slot holding the NTA02.

—End—

**Table 63**  
**NTAK02 switch settings**

Port 0	Port 1	SW1-1	SW1-2
SDI	DCH	OFF	OFF
SDI	DPNSS1	OFF	ON
—	ESDI	ON	ON

Port 2	Port 3	SW1-3	SW1-4
SDI	DCH	OFF	OFF
SDI	DPNSS1	OFF	ON
—	ESDI	ON	ON

**Table 64**  
**NTAK02 jumper settings**

Unit	Jumper location	Strap for DTE	Strap for DCE	Jumper location	RS422	RS232
Unit 0	J10	C - B	B - A			
Unit 1	J7	C - B	B - A	J9	C - B	B - A
	J6	C - B	B - A	J8	C - B	B - A
Unit 2	J5	C - B	B - A			
Unit 3	J4	C - B	B - A	J2	C - B	B - A
	J3	C - B	B - A	J1	C - B	B - A

**Procedure 26**  
**Setting up the D-channel**

Step	Action
—End—	

## ISL software implementation

There are two modes of ISDN Signaling Link (ISL) operation, shared mode and dedicated mode.

### Shared mode

The NTAK79 on-board DCHI supports ISDN PRI signaling and ISL trunks. The configuration is basically the same as the PRI D-channel, with the D-channel also supporting ISL trunks.

The DTI/PRI software implementation sequence can be used (refer to the appropriate chapters for more information) with the following exceptions.

#### LD 17 - Shared mode

Prompt	Response	Description
USR	SHA	D-channel for ISL in "shared" mode, used for both ISDN PRI and ISL.
ISLM	1-240	Number of ISL B-channel (trunks) controlled by the D-channel (no default value).

#### LD 16 - Interface type

Prompt	Response	Description
IFC	SL1	Interface type must be SL1 (this is the only type supported for ISL).
MODE	ISLD	TIE route used for ISL members.

#### LD 14 - Channel identifier

Prompt	Response	Description
CHID	1-240	Channel identifier for ISL channels. Must be coordinated with the far-end.

#### Dedicated mode

The DCHI uses the NTAK02 circuit card and does not support ISDN PRI signaling. The DCHI is reserved for ISL use only. The D-channel can communicate with the far-end by means of a dedicated leased line modem or dial-up modem.

Note that the following implementation relates to analogue TIE trunks being used as B-channels. In the case where DTI/PRI trunks are also used, then LD 17 digital loop (2.0 Mb PRI) and LD73 (2.0 Mb PRI/SYTI) must also be configured with the appropriate clocking and threshold settings.

For ISL dedicated mode using a dial-up modem, a 500 set, TIE trunk route and member must be programmed (used for D-channel). [Table 65 "Configuring basic ISL capability" \(page 170\)](#) summarizes the required steps.

**Table 65**  
**Configuring basic ISL capability**

Step	LD	Action
1	17	Configure the D-channel for ISL use.
2	15	Enable ISDN option.

Step	LD	Action
3	16	Enable the ISL option on a per route basis, assign a D-channel for each route.
4	14	Assign a channel identification to each trunk with the ISL option.

**LD 17 - Configure the D-channel for ISL**

Prompt	Response	Description
REQ	CHG	Change data.
TYPE	CFN	Configuration data block.
ADAN	NEW DCH 0-79	Add primary D-channel.
CTYP	DCHI	D-channel card type.
CDNO	Option 11C: 1-9, 11-19, 21-29, 31-39, 41-49	Card slot in which the card supporting the DCHI resides.
	CSE 1000: 11-14, 21-24, 31-34, 41-44	
PORT	1	Must be set to 1.
USR	PRI	D-channel for ISDN PRI only.
IFC	SL1	Interface type.
DCHL	1-9	PRI2 card number. (Must match entry for CDNO).
SIDE	NET (USR)	Net: network, the controlling switch.
		User: slave to controller.
RLS	XX	Software release of far-end. This is the current software release of the far-end. If the far-end has an incompatible release of software, it prevents the sending of application messages. For example, for Network Ring Again.
CLOK		D-channel clock type for signaling.

Prompt	Response	Description
	EXT	Source of D-channel clock is external to DCHI card (in this case the DTI/PRI circuit card). Normally, EXT is used for PRI/ISL.  <b>Note 1:</b> Do not confuse this clock with the E1 span Clock Controller found on the NTAK10/79. This clock is in reference to the DCHI synchronous mode of operation.  <b>Note 2:</b> If directly connecting two DCHI ports with out the use of modems, set "CLOK" to "EXT" on one side and "INT" on the other.
LAPD	YES,(NO)	Change LAPD parameters. Simply carriage return if timers are to be left at default value. The following timers are prompted only if LAPD is set to YES. The following can all be left at default during initial set-up.
T23	1-(20)-31	Interface guard timer checks how long the interface takes to respond. In units of 0.5 seconds (default 20 = 10 seconds).
T200	2-(3)-40	Retransmission timer in units of 0.5 seconds (default 3 = 1.5 seconds).
N200	1-(3)-8	Maximum number of retransmissions.
N201	4(260)	Maximum number of octets in information field.
K	1-(7)-32	Maximum number of outstanding unacknowledged frames (NAKS).

**LD 15 - Enable the ISDN option**

Prompt	Response	Description
REQ:	NEW CHG	Add new data. Change existing data.
TYPE:	NET	Networking data.
CUST	0-31	Customer number.
ISDN	YES	Customer is equipped with ISDN.
PNI	1-32700	Customer private network identifier. MUST be unique to this customer in the private network. Used as part of the setup message for feature operation such as Network Ring Again and Network ACD.
HNPA	NPA	Telephone area code for this system. Sent as part of setup message as CLID.
HNXX	NXX	Telephone local exchange code for this system. Sent as part of setup message for calling line identification.

Prompt	Response	Description
HLOC	XXX	Home location code (NARS).
LSC	1-9999	One to four digit Local Steering Code established in the Coordinated Dialing Plan (CDP). The LSC prompt is required for Calling Line ID and Network ACD.
AC2		Access Code 2. Enter call types (type of number) that use access code 2. Multiple responses are permitted. This prompt only appears on NARS equipped systems. If a call type is not entered here, it is automatically defaulted to access code 1.
	NPA	E.164 National.
	NXX	E.164 Subscriber.
	INTL	International.
	SPN	Special Number.
	LOC	Location Code.

**LD 16 - Enable the ISL option**

Prompt	Response	Description
REQ	NEW CHG	Add new data. Change existing data.
TYPE	RDB	Route data block.
CUST	0-31	Customer number.
ROUT	0-127	Route number.
TKTP	TIE	TIE trunk route.
DTRK	YES NO	Enter YES if this is a Digital Trunk Interface (DTI or PRI).
ISDN	YES	ISDN option.
MODE	ISLD	Route for ISL application.
DCHI	XX	DCHI port number in CFN to carry the D-channel for this TIE trunk route.
PNI	1-32700	Customer private network identifier. Must be the same as the CDB PNI at the fa- end.
IFC		Interface type.
	SLI	System to system.

Prompt	Response	Description
CTYP	aaa <CR>	Call Type. Enter the call type to be associated with the outgoing route for direct dialing using the trunk access code (instead of NARS access code).
INAC	YES	Insert Access Code. Permits the NARS AC1 or AC2 access code to be re-inserted automatically on an incoming ESN call.

**LD 14 - Assign a channel identifier**

Prompt	Response	Description
REQ	NEW CHG	Add new data. Change existing data.
TYPE	TIE	TIE trunk type.
TN	c u	Card and unit to be associated with this trunk.
RTMB	0-127 1-510	Route number and member number.
CHID	1-240	Channel identifier for ISL channels (remove with Xnn). Must be coordinated with far-end (no default value).

**ISL maintenance****DCHI quick reference**

Table 66 "D-channel commands (LD 96)" (page 174) provides a quick-reference list of D-channel commands (LD 96).

**Table 66**  
**D-channel commands (LD 96)**

Command	Action
DIS DCHI N	Disable DCHI port N.
ENL DCHI N	Enable DCHI port N.
EST DCH N	Establish D-channel N.
PLOG DCHI N	Print D-channel statistics log N.
RLS DCH N	Release D-channel N.
SDCH DCH N	Release a D-channel and switch D-channels.
RST DCH N	Reset D-channel N.
STAT DCH (N)	Print D-channel status (link status).
TEST-100/101	DCH tests.
STAT SERV	Print the current service and service acknowledge message for DCHI N.

Command	Action
ENL SERV N	Enable service messages for DCHI N.
DIS SERV N	Disable service messages for DCHI N.

### Maintenance messages

D-channel status and error conditions are reported as DCH messages. These messages can be found in the *Software Input Output Reference - System Messages (NN43001-712)*.

### Maintenance testing

#### ISL back-to-back testing (without modems)


For maintenance reasons or testing purposes, it is sometimes necessary to connect ISL back-to-back (without modems). This connection is normally done within the same system in a lab environment.

#### Hardware requirements:

A 25-pin female-to-female gender changer is required to connect the NTA19BA cable back-to-back. The gender changer is not supplied with the system. "ISL back-to-back connection" (page 175) illustrates the connection.

**Note:** Protocol converters AO378652 and AO381016 supplied with the system are not gender changers.

#### ISL back-to-back connection

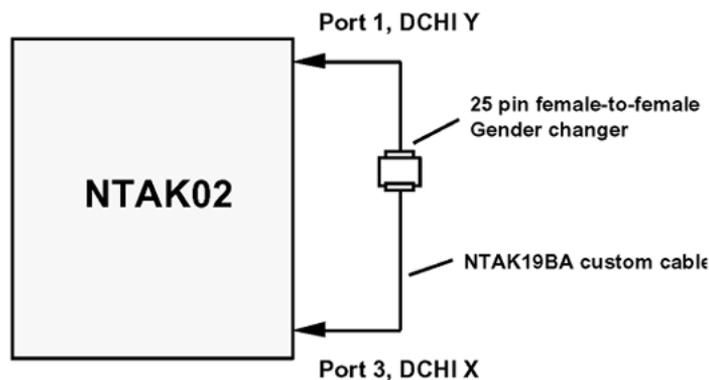

Port settings:

- For port 3, DCHI X, program the following settings in LD 17:
  - CLOK = INT (Internal clock)
  - SIDE = SLAV (Slave)

Set NTAK02 port 3 jumper plugs to DCE and RS-422.

- For port 1, DCHI Y, program the following settings in LD 17:
  - CLOK = EXT (External clock)
  - SIDE = MAS (Master)

Set NTAK02 port 1 jumper plugs to DTE and RS-422.



Nortel Communication Server 1000

## ISDN Primary Rate Interface Maintenance

Copyright © 2003-2007, Nortel Networks  
All Rights Reserved.

Publication: NN43001-717  
Document status: Standard  
Document version: 02.02  
Document date: 7 December 2007

To provide feedback or to report a problem with this document, go to [www.nortel.com/documentfeedback](http://www.nortel.com/documentfeedback).

Sourced in Canada

### LEGAL NOTICE

While the information in this document is believed to be accurate and reliable, except as otherwise expressly agreed to in writing NORTEL PROVIDES THIS DOCUMENT "AS IS" WITHOUT WARRANTY OR CONDITION OF ANY KIND, EITHER EXPRESS OR IMPLIED. The information and/or products described in this document are subject to change without notice.

Nortel, the Nortel Logo, the Globemark, SL-1, Meridian1, and Succession are trademarks of Nortel Networks.

All other trademarks are the property of their respective owners.

