

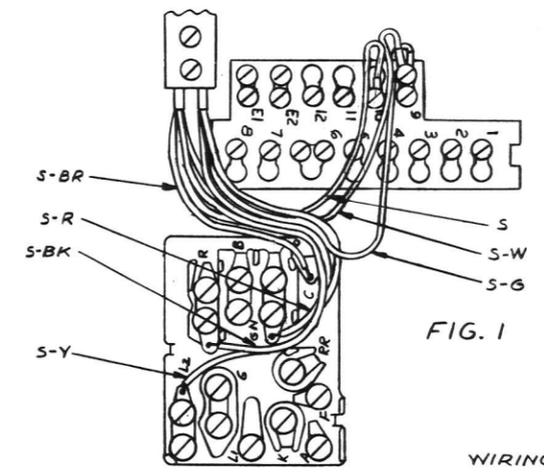


CORDING

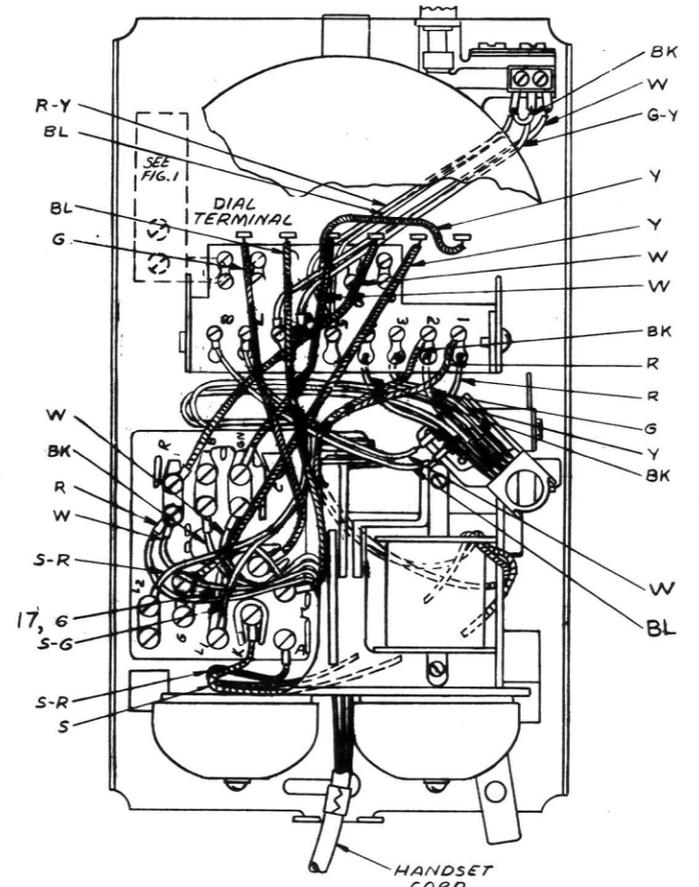

WIRING NOTE:
 51. IN WIRING DIAGRAM, CONNECTIONS LABELED * SHALL BE SOLDERED PER X512, METHOD C.

NOTE:
 1. ITEM 17 IS SPECIFIED IN STOCK LIST ON MAIN ASSEMBLY.

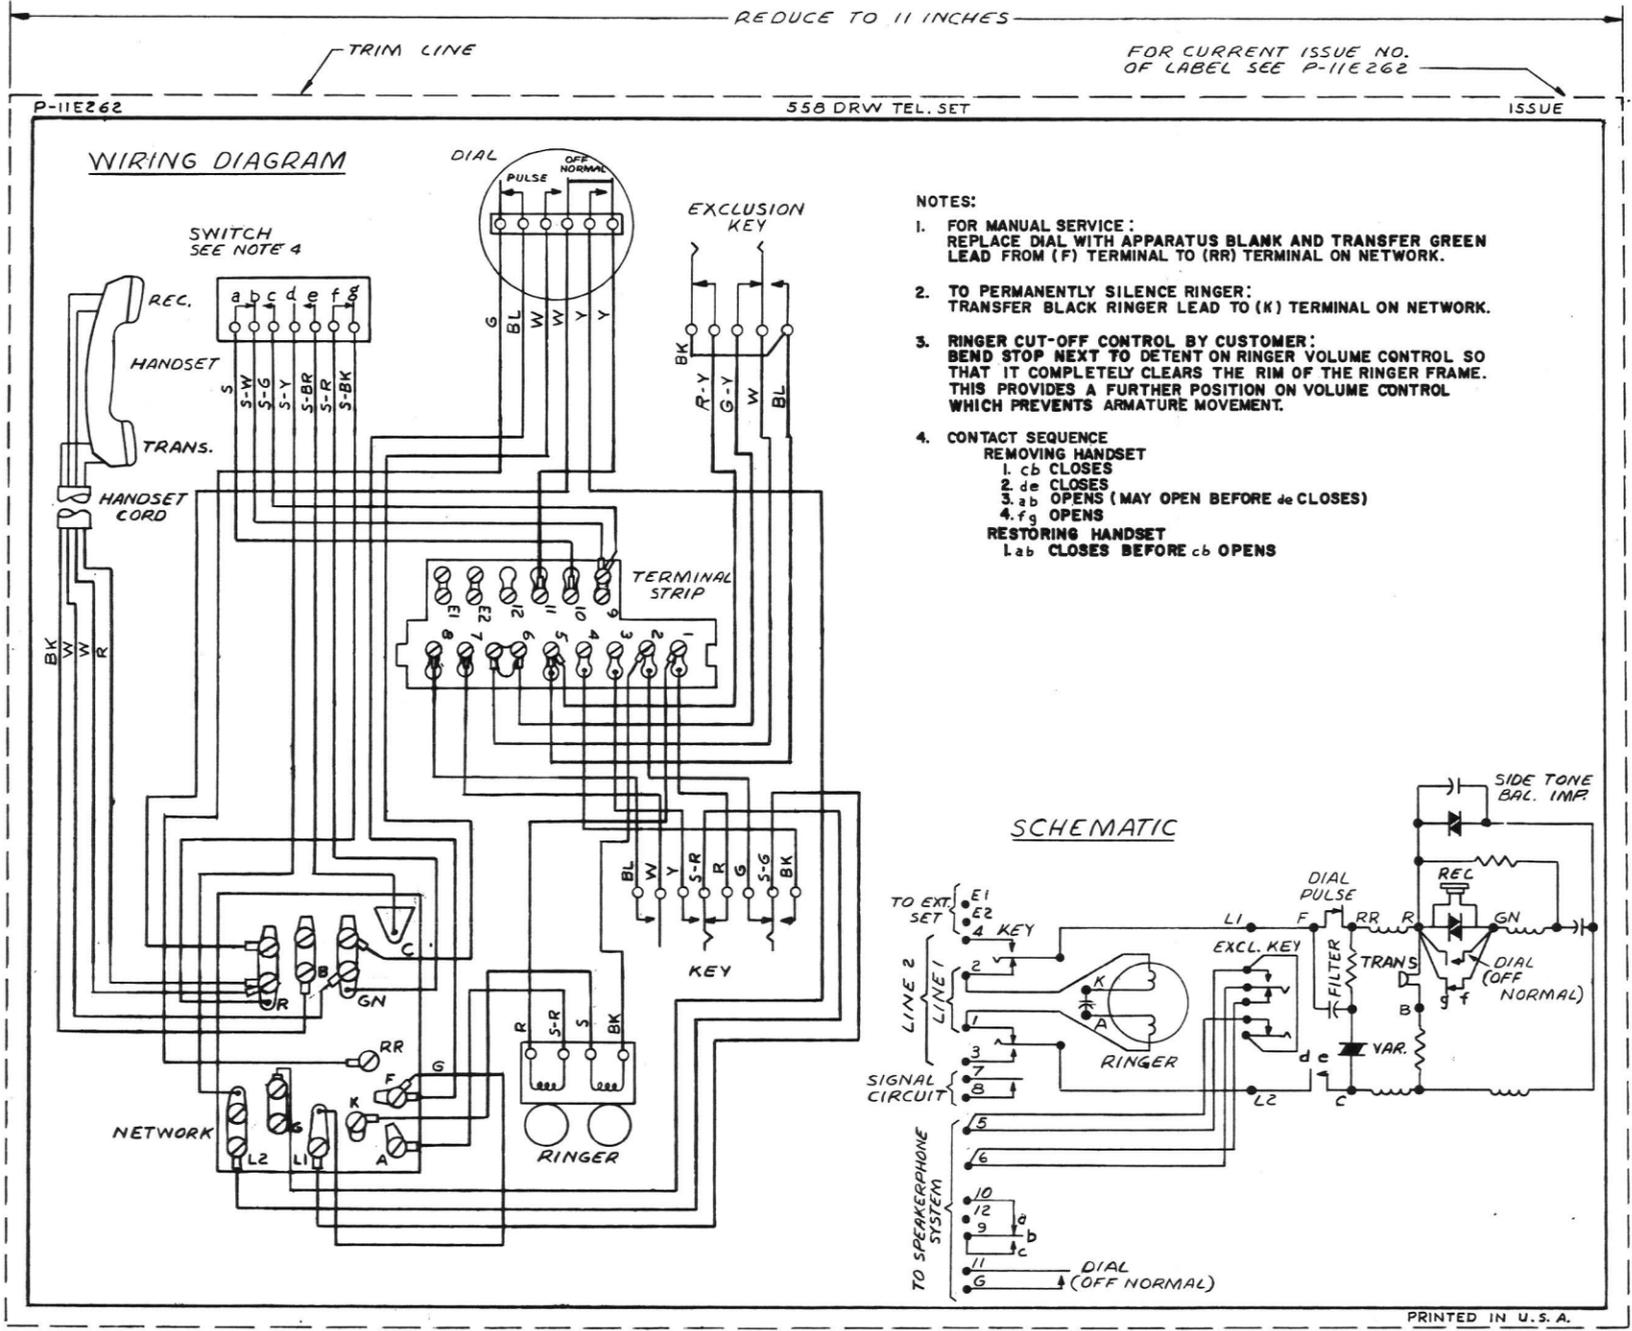

- NOTES:
- FOR MANUAL SERVICE: REPLACE DIAL WITH APPARATUS BLANK AND TRANSFER GREEN LEAD FROM (F) TERMINAL TO (RR) TERMINAL ON NETWORK.
 - TO PERMANENTLY SILENCE RINGER: TRANSFER BLACK RINGER LEAD TO (K) TERMINAL ON NETWORK.
 - RINGER CUT-OFF CONTROL BY CUSTOMER: BEND STOP NEXT TO DETENT ON RINGER VOLUME CONTROL SO THAT IT COMPLETELY CLEARS THE RIM OF THE RINGER FRAME. THIS PROVIDES A FURTHER POSITION ON VOLUME CONTROL WHICH PREVENTS ARMATURE MOVEMENT.
 - CONTACT SEQUENCE
 REMOVING HANDSET
 1. cb CLOSES
 2. de CLOSES
 3. ab OPENS (MAY OPEN BEFORE de CLOSES)
 4. fg OPENS
 RESTORING HANDSET
 Lab CLOSES BEFORE cb OPENS

PRINT BLACK

CODE	WIRING DIAGRAM AND CIRCUIT SCHEMATIC SAME AS FOR
558 CR & DR TYPE	558 DRW

P.
 CHANGED: TERMINAL STRIP TO AGREE PICTORIALY WITH LP-11E256, 155.2.
 R.L.W. C.S. 643
 CO-2624/9 17M
 ISSUE: 2 5-25-59
 CHANGED: IN CORDING DIAGRAM, R-Y WAS G-Y; G-Y WAS R-Y; IN WIRING DIAGRAM, AT EXCLUSION KEY, R-Y WAS G-Y; G-Y WAS R-Y.
 JDM C.S. 643
 CO-441478 17M
 ISSUE: 3 12-23-59
 CHANGED: IN WIRING DIAGRAM, AT NETWORK, Y LEAD WAS CONNECTED TO LOWER SCREW AT TERMINAL G; CORDING TO AGREE WITH WIRING DIAGRAM.
 JDM C.S. 643
 CO-441528 17M
 ISSUE: 4 12-23-59
 CHANGED: VIEW IN SCHEMATIC WAS SHOWN THUS:

 TO 659A XMTR. WIRING DIAGRAM AND CORDING TO AGREE.
 JDM C.S. 643
 CO-441537 17M
 ISSUE: 5 12-23-59

LA-579162