


P 228251

6026 C

ISSUE-1

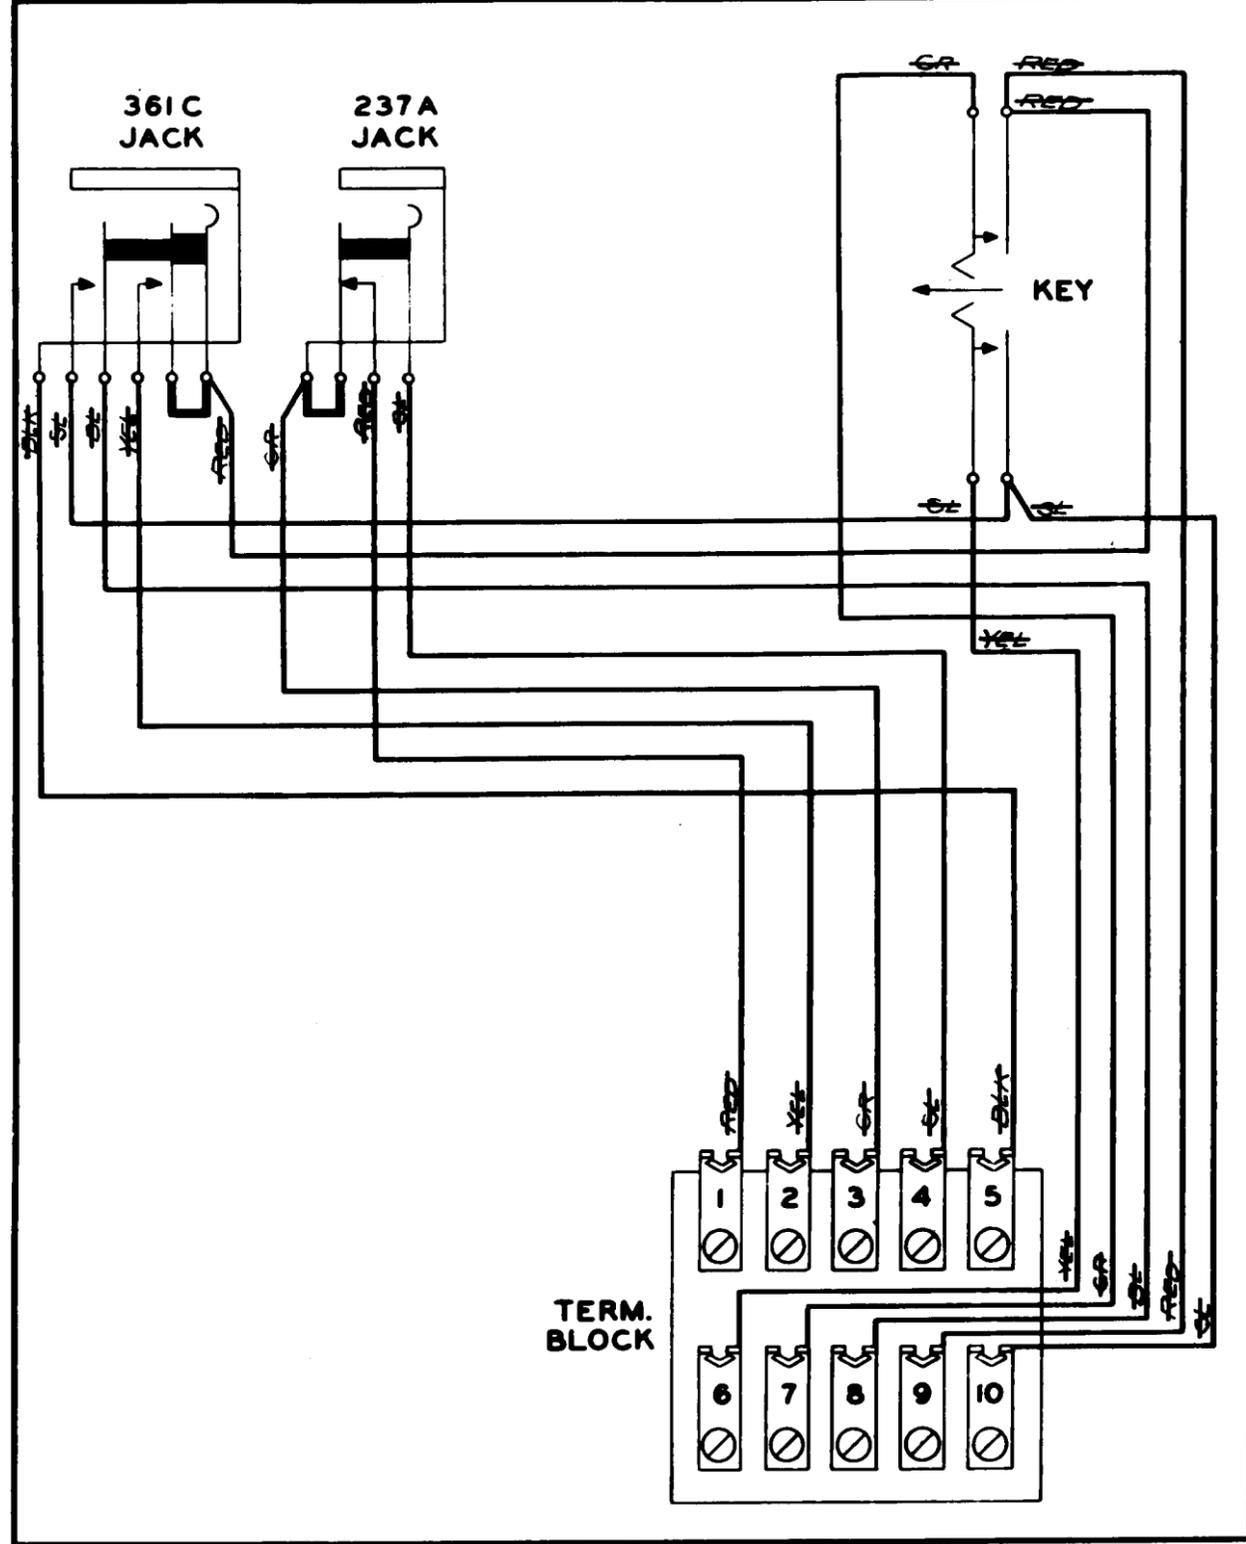

TRIMMING LINE

NY

- NOTES:
1. — DENOTES STRAPPING TO BE DONE WITH P-314954 (#24 A.W.G. TINNED COPPER WIRE) AND SLEEVING P-26991.
  2. ALL OTHER WIRES SHALL BE P-465781 #22 AWG BLACK WIRE CUT TO REQUIRED LENGTH. THE SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY TOP ASSEMBLY TO BE REVERSED.
  3. ALL CONNECTIONS TO BE SOLDERED PER SPEC 50016, METHOD D.
  4. SPARKLEKOTE DRY STICK PAPER 60\*(BUMPER STOCK) PRINTED BLACK.

A-702984 A  
 ISSUE-1  
 NOTE 4 READ "WHITE MANILA PAPER 16" (500-17" X 22") PRINTED BLACK (TO CONFORM WITH PAPER USED FOR CIRCUIT LABELS) CLK  
 ISSUE-2 V.K. 11-7-49  
 CHGD: NOTE 2 & 4 READ ALL OTHER WIRES TO BE IN CABLE "WHITE OFFSET WRITING PAPER 40" (1000 X 17 X 22) PRINTED BLACK, RESP  
 CANCELLED: ALL COLORED LEAD DESIGNATIONS  
 8-31-64 455150-B1-L  
 3  
 CHANGED: IN NOTE 2 THE SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY TOP ASSEMBLY TO BE REVERSED" WAS "SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY UNIT TO BE REVERSED."  
 4-15-66 413647-B1-F  
 O.B.  
 T.H. (initials) 4

6026 C KEY	A: 63135
USED ON	DWG.
⊙ DENOTES MANUFACTURE DISCONTINUED	⊠ DENOTES MANUFACTURE LIMITED
AB	
WIRING DIAGRAM & CIRCUIT LABEL (P-228251)	
DESIGNED BY C.F.F.	CHECKED BY V.K.
WESTERN ELECTRIC CO. INC. ENGINEER OF MANUFACTURE	
A-702984	

L

A-702984