


P244753 6026 B ISSUE-3

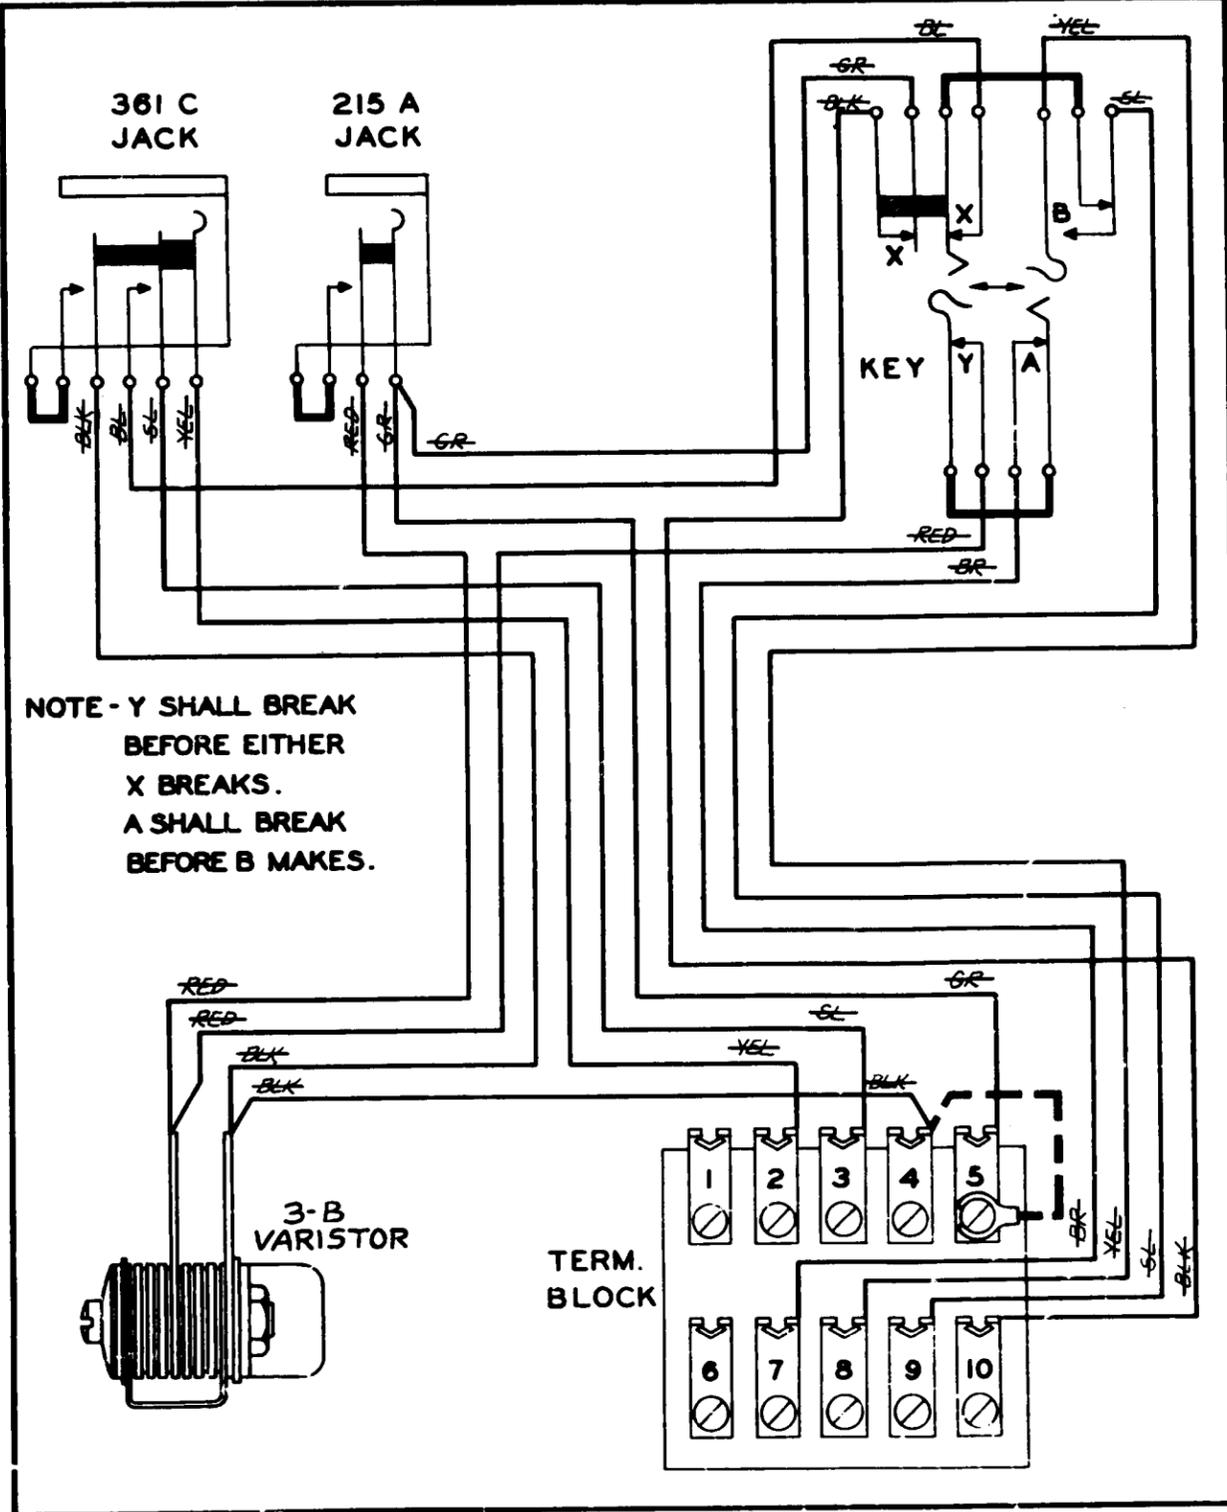

NOTE - Y SHALL BREAK BEFORE EITHER X BREAKS. A SHALL BREAK BEFORE B MAKES.

TRIMMING LINE

NOTES

1. DENOTES STRAPPING TO BE DONE WITH P314954 (*24 A.W.G. TINNED COPPER WIRE) AND SLEEVING P26991.
2. DENOTES MOVABLE STRAP 1 1/2" LG. OF P465781 EQUIPPED WITH AN 62 CORD TIP
3. ALL OTHER WIRES SHALL BE P-465781 *22 AWG BLACK WIRE CUT TO REQUIRED LENGTH. THE SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY TOP ASSEMBLY TO BE REVERSED.
4. ~~CONDUCTOR ENDS SHALL BE DIPPED IN NO.105 WIRE & CABLE IMPREGNATING WAX PER SPEC 51088 TO PREVENT FRAYING.~~
5. ALL CONNECTIONS SHALL BE SOLDERED PER SPEC 50016 (ROSIN FLUX)
6. SPARKLEKOTE DRY STICK PAPER 60" (BUMPER STOCK) PRINTED BLACK.

ISSUE-1	10-27-34	APR E
IN TITLE SPACE & IN LABEL "P-244753" WAS "P-247751" IN LABEL "3-A VARISTOR" WAS "3-A RESISTANCE" (157642-BL)		
ISSUE-2	5-2-34	N.J.
P357319 WAS P-350100 NOTE 4 WAS SPE. 12-27-34		
ISSUE-3	12-27-34	E.K.
NOTE: 1. P26991 WAS P183056. IN NOTE-2, P-465781 WAS P357019. JEN 165913-CL		
ISSUE-4	5-20-41	V.K.
IN LABEL "3-B VARISTOR" WAS "3-A VARISTOR" (157642-BL)		
ISSUE-5	8-29-50	V.K.
IN NOTE 2, "62" WAS "06" EJM (404 219-D-4)		
ISSUE-6	10-3-55	V.K.
CHGD: NOTE 3 & 6 WERE "ALL OTHER WIRES ARE IN CABLE" & WHITE MANILA PAPER 16" (500 X 17 1/2) PRINTED BLACK. RESS UNLLELLED. ALL COLORED LEAD DESIGNATIONS		
P-314954-50-BI-L		
7		
CHANGED IN NOTE 2 THE SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY TOP ASSEMBLY TO BE REVERSED. WAS "SLACK SHALL BE SUFFICIENT TO PERMIT THE KEY UNIT TO BE REVERSED."		
4-15-66	413647-BI-F	8
O.B.		
T.H.		
6026-B KEY	A163189	
USED ON	DWG.	
A DENOTES A AND M ONLY		
B DENOTES MANUFACTURE DISCONTINUED		48

A-163192

**WIRING DIAGRAM AND
CIRCUIT LABEL (P244753)**

SCALE \sim

DRAWN BY <i>HL</i>	APPROVED BY <i>[Signature]</i>
CHECKED BY <i>[Signature]</i>	

A-163192

WESTERN ELECTRIC COMPANY, INC
ENGINEER OF MANUFACTURE
APPARATUS DRAFTING DIVISION

L

PRINTED IN U.S.A.

REDUCE TO 3