


P-24E506

636 BW & 637 CW TELEPHONE SETS

ISSUE: 1

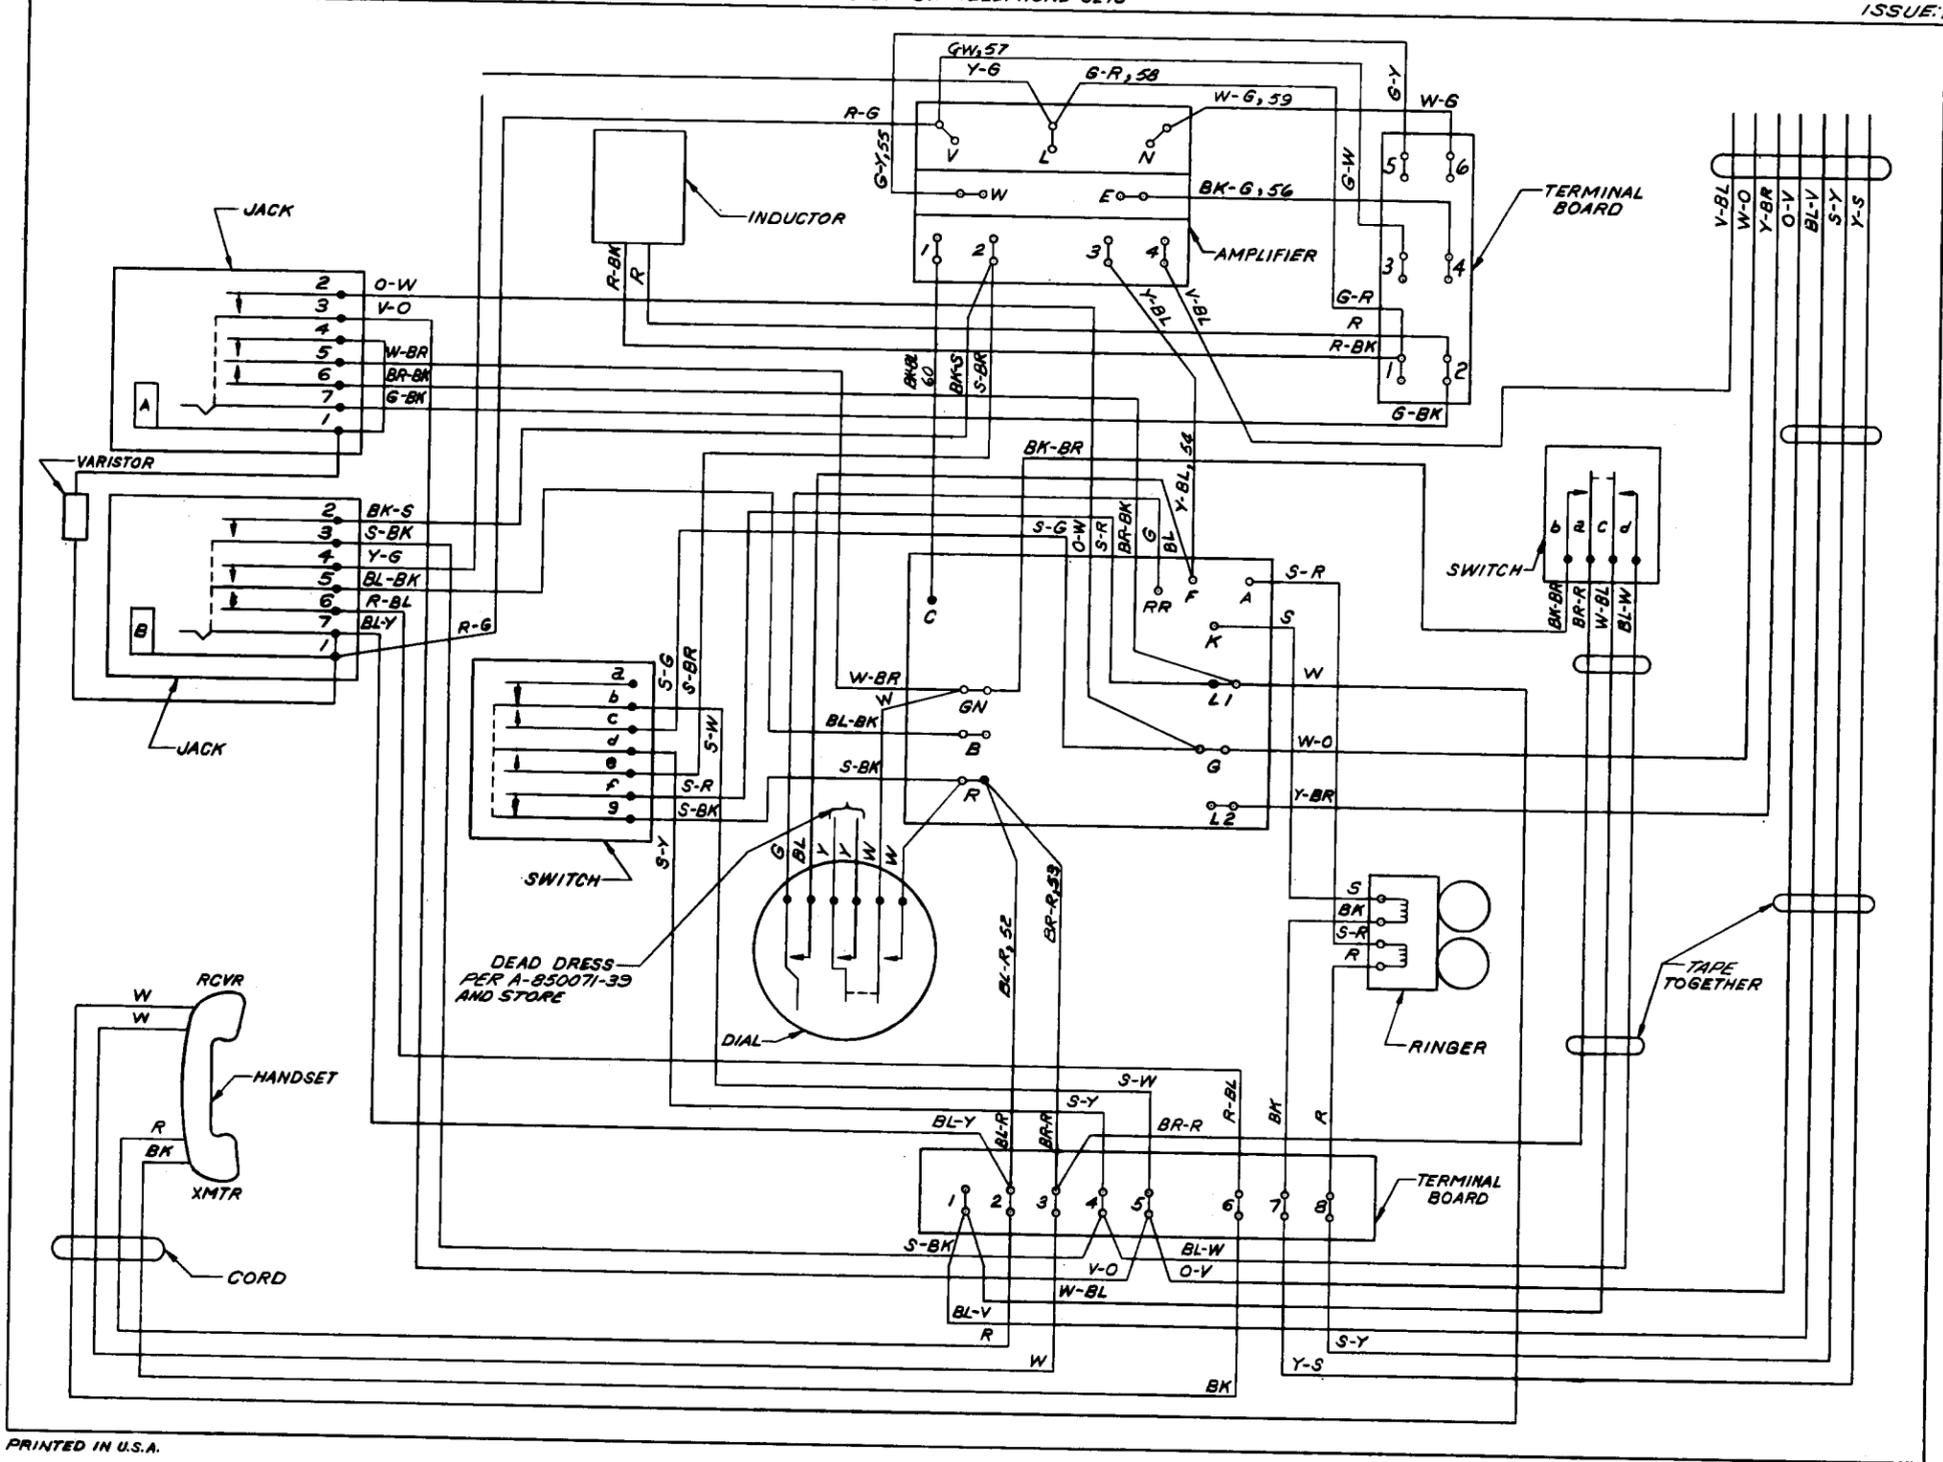

- NOTES:
1. LACE TOGETHER CONDUCTORS INDICATED FOR 7.00 INCHES WITH TAPE, ITEM 77 OF P-82B100.
 2. WHEN A 617A KEY IS USED IN THE TELEPHONE SET, ATTACH THE SPADE-TIPPED CONDUCTOR OF THE KEY TO THE SG TERMINAL ON THE MOUNTING CORD TERMINAL STRIP. REMOVE THE SPADE-TIPPED STRAP FROM THE CG TERMINAL ON THE STRIP.
 3. ITEM NUMBERS REFERRED TO ARE SHOWN IN STOCK-LIST OF P-82B100-499.

REDUCE TO 8 1/4 INCHES

PRINTED IN U.S.A.

PRINT BLACK

P-24E506

FOR CHANGE REFER TO DRAFTING CHG. CARD INDEX	
ESTD BY TEL	
636 BW TEL	
USED ON	DWG

LABEL, WIRING & CIRCUIT
 SCALE 2/1
 WESTERN ELECTRIC CO. INC.
 ENGINEER OF MANUFACTURE

MATERIAL FINISH
 WHITE SULPHITE BOND PAPER
 20 LB. (500 SHEETS 17X22)
 UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. UNLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:
 TO 2 DECIMAL PLACES ± AS ANGLES ±
 TO 3 DECIMAL PLACES ±
 FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 19.002, PART 2, SECTION 8.17. (THIS NOTE IS NOT APPLICABLE TO CENTRAL OFFICE EQUIPMENT.)

6S P-24E506