
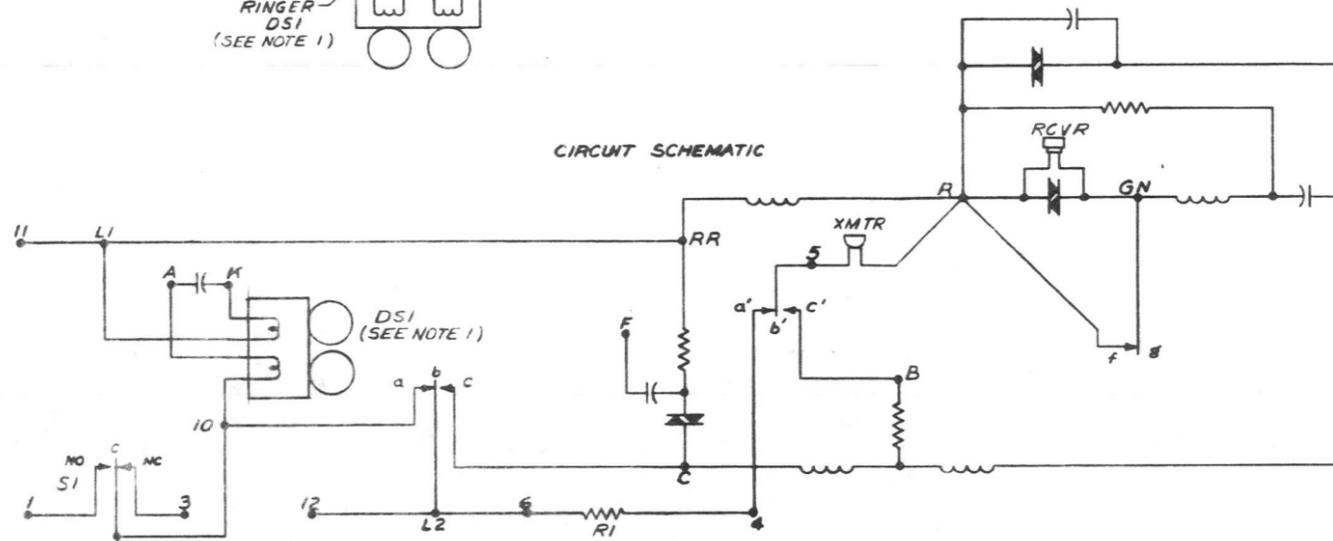


BSRS451.503

P-24E699

8KW & 8PW TYPE APPARATUS UNIT

ISSUE-3

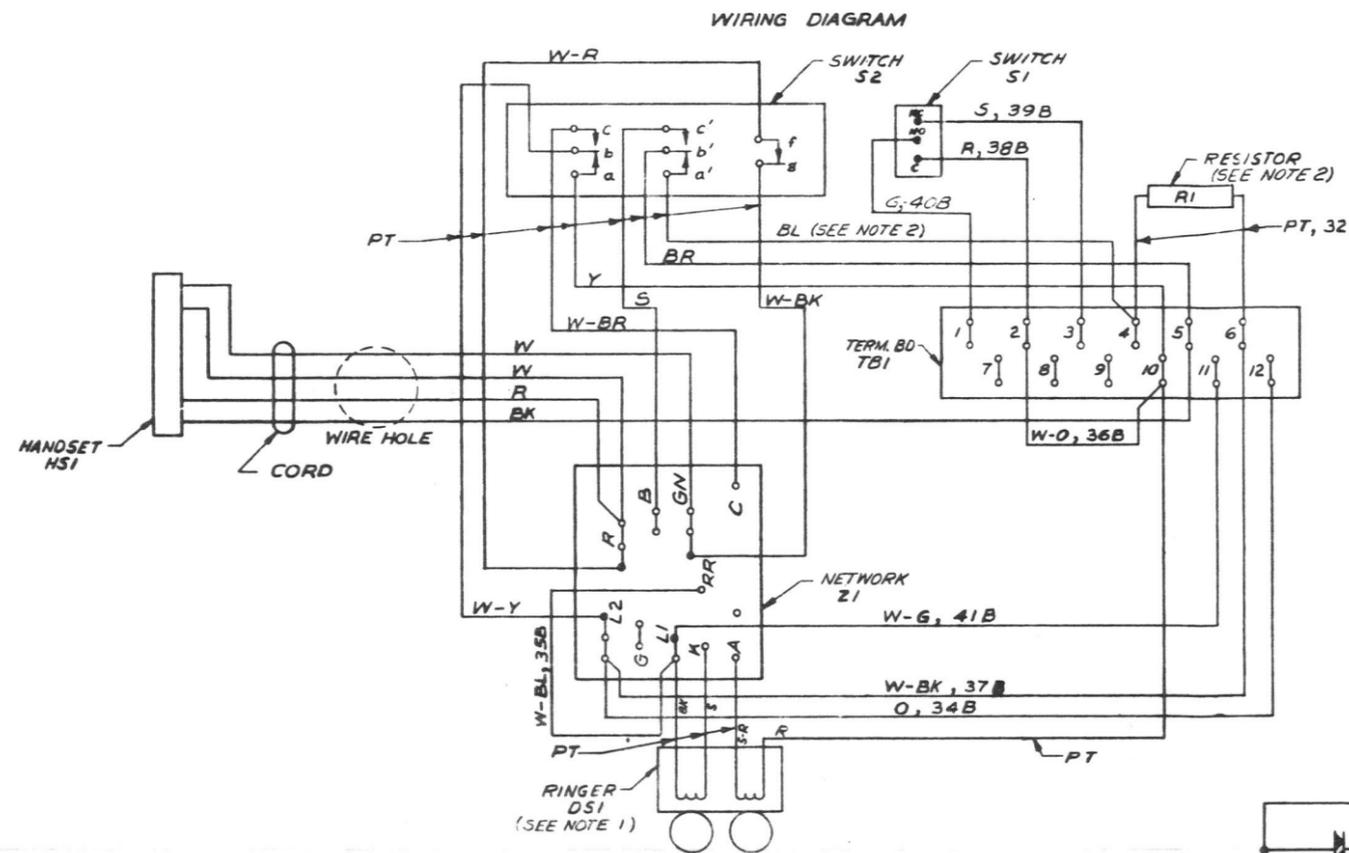

NOTES:

1. RINGER, DS1, SHALL BE OMITTED FOR THE 8P AND 8PW TYPE APPARATUS UNIT.
2. THE PT LEAD FROM RESISTOR (R1) SHALL BE ASSEMBLED BETWEEN THE EYELET AND WASHER ON TERMINAL 4 OF TBI. THE BL LEAD FROM SWITCH S2 SHALL BE ASSEMBLED BETWEEN THE WASHER AND THE SCREW HEAD ON TERMINAL 4 OF TBI.

NOTES:

1. ITEM NUMBERS AND DESIGNATIONS REFERRED TO ARE SHOWN IN STOCK LIST OF A-579919 AND P-24E698.
2. WIRING DIAGRAM CONNECTIONS LABELED @ SHALL BE SOLDERED PER 50016 METHOD C.
3. PT - LEADS ARE FURNISHED WITH COMPONENT.

P-24E699	
REV	DATE
1	11-12-63
2	11-12-63
3	11-12-63
4	11-12-63
ISSUE-1	
CHANGED: BKW & BPW WERE BUW & BABW RESP. IN NOTE (1) 8P & 8PW WERE BAB & BABW RESP. IN USED ON COLUMN BK WAS BU. ISS. NO. OF CIRCUIT LABEL WAS ONE (1).	
5-24-63	
CHANGED: W-BK, 37B LEAD WAS W-BL, 37B.	
ADD: 591392-D	
8-12-63	
CHANGED: SCR. CONV. AT T.C. ON Z1 WAS SOLD CONV. ISS. NO. IN CKT LABEL WAS 2.	
ADD: 591444-B1	
ADDED: NOTE 2 & REF 2 PLACES TO CKT LABEL.	
591643-B1	
11-12-63	

REDUCE TO 8 1/4 INCHES

PRINTED IN U.S.A.

PRINT BLACK

FOR CHARGES REFER TO DFTG CARD INDEX

BR APP UNIT USED ON DWS

LABEL, WIRING & CIRCUIT

SCALE 2/1

WESTERN ELECTRIC CO. INC. ENGINEER OF MANUFACTURING

WHITE SULPHITE BOND PAPER 20 LB. (500 SHEETS 17 X 22)

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. UNLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS UNLESS OTHERWISE SPECIFIED TO 3 DECIMAL PLACES & AS ANGLES & TO 3 DECIMAL PLACES & FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 18.002, PART 2, SECTION 127.

6S

P-24E699