P-26E447

632 CW TYPE TEL SET

ISSUE-2

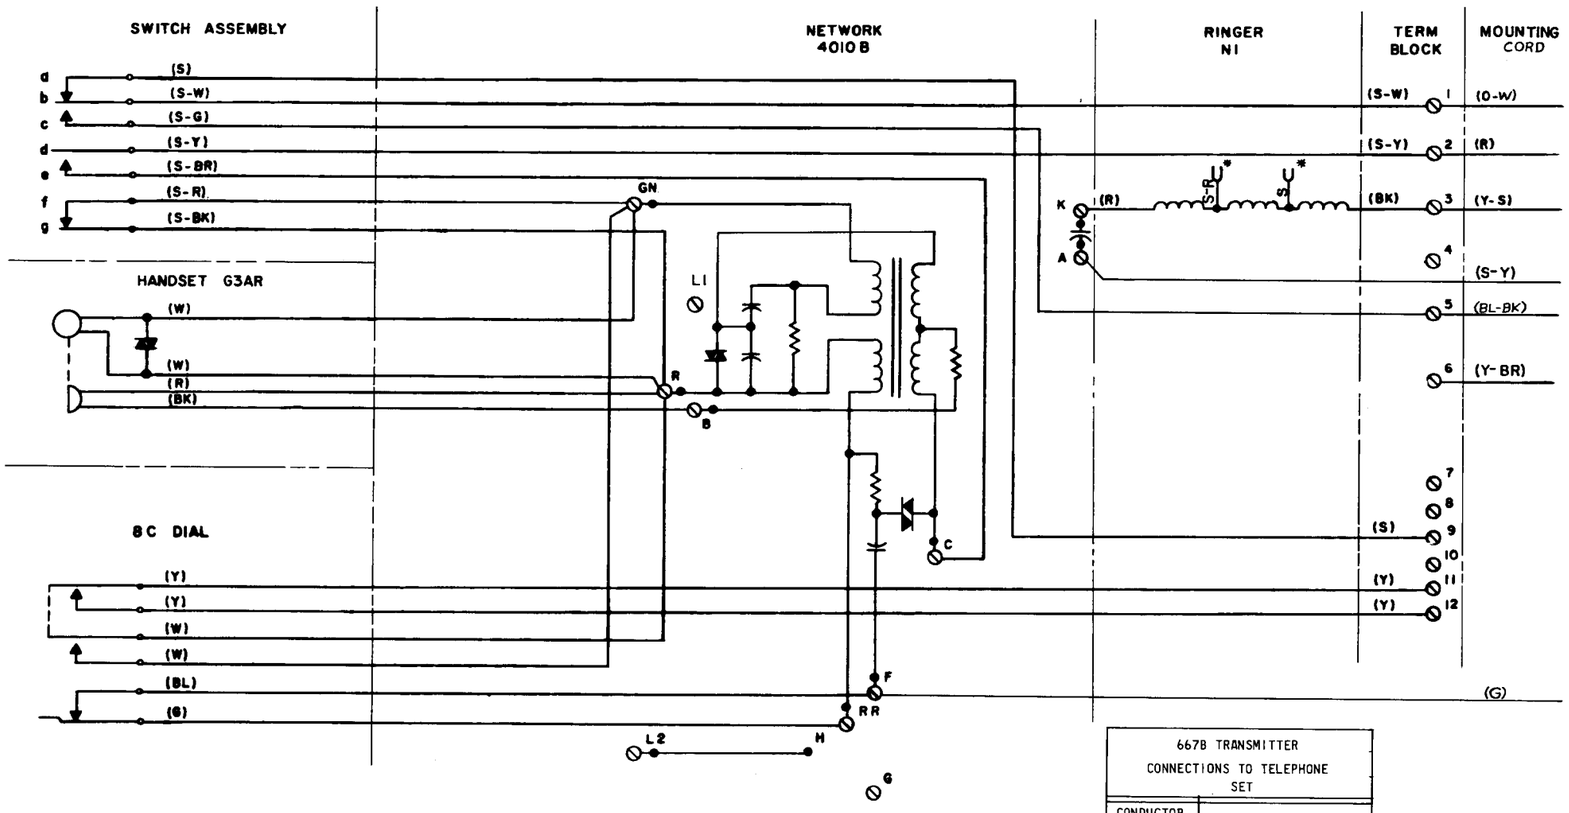

667B TRANSMITTER CONNECTIONS TO TELEPHONE SET	
CONDUCTOR COLOR	TERMINATION
O-V	TERM 1 TB1
Y-BL	TERM RR NETWORK
BL-Y	TERM 2 TB1
O-Y	TERM 5 TB1
Y-O	TERM 9 TB1
Y-G	TERM 11 TB1
G-Y	TERM 12 TB1

* INSULATE AND STORE

NOTES:

1. WHEN A 617A KEY IS PART OF THE TELEPHONE SET, ATTACH THE SPADE-TIPPED CONDUCTOR OF THIS KEY TO THE SG TERMINAL ON THE MOUNTING CORD TERMINAL STRIP. REMOVE THE SPADE-TIPPED STRAP FROM THE CG OR 2A TERMINAL ON THE STRIP.
2. DEAD DRESS THESE SPADE TIPPED LEADS PER A-850071-39 AND STORE.

REDUCE TO 8 1/2 INCHES

PRINTED IN U.S.A.

PRINT BLACK

P-26E447

ENGR. SECTION		
ENGR. MANAGER		
3-7-63	ISSUE 1	
DRAWN		
ENGR. REC'D		
ENGR. BTC		
3-7-63	ISSUE-1	

REMOVED: (A1), (T1), (R1), (R2), (L1), (P3), & (A4) COMPRES. BONDING TO COLORS O-V, Y-BL, BL-Y, O-Y, Y-O, Y-G, & G-Y, RESP IN TABLE OF CONNECTIONS.

DRAWN		
ENGR. REC'D		
4-9-63	2	

CHANGED: DIV LINE BET. RING & NET. WAS LOC VERT. BET. TERM. C & TERM. A & K; ISSUE NO. OF CIRCUIT LABEL WAS 1

PR	591454-AK
6-27-63	3

P-26E447

FOR CHARGES REFER TO DFTG CARD INDEX

632CTEL SET

USED ON | DWG

LABEL, CIRCUIT & CONNECTING DIAGRAM

SCALE NONE

WESTERN ELECTRIC CO. INC. ENGINEER OF MANUFACTURE

MATERIAL: WHITE SULPHITE BOND PAPER 20 LB (500 SHEETS 17x22)

FINISH

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NONLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED:
TO 2 DECIMAL PLACES ± AS ANGLES ±
TO 3 DECIMAL PLACES ±
FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 10,000, PART 2, SECTION 237.

DWG SIZE 6S

CDS P-26E447