
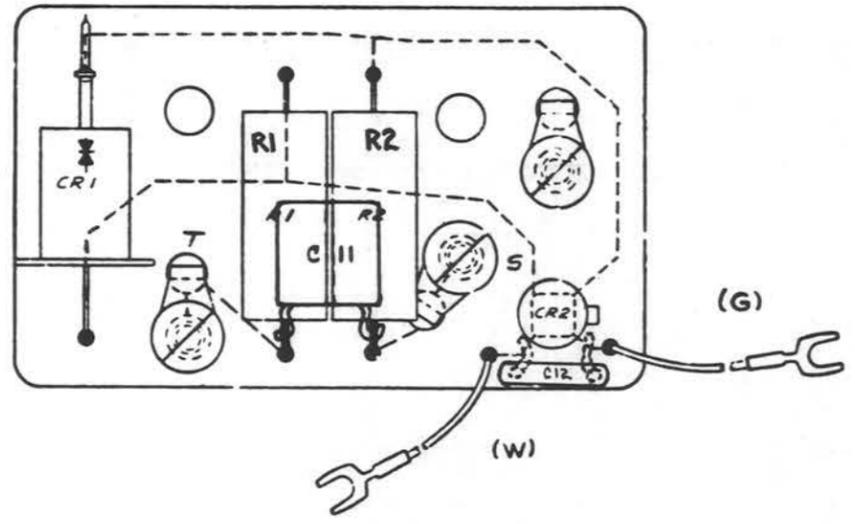


R. F. SUPPRESSION NOTES:

1. LOCATE (2) 0.01uf (KS 19708-L4) CAPACITORS ON THE D-180191 POLARITY GUARD APPROXIMATELY AS SHOWN. (C11 AND C12)
2. DRILL (4) 0.025 HOLES.

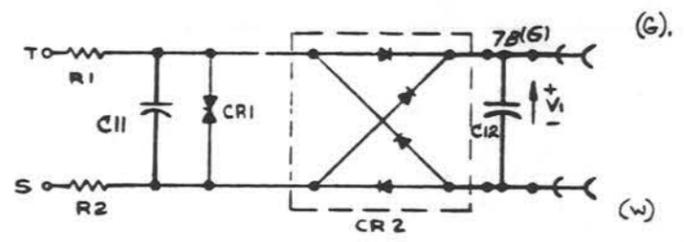

ENGR.  
 G. E. JACKSON  
 R. KOT  
 10-18-67  
 ISSUE 2 5-27-68  
 Delete Material Not Refering to R.F. Suppression  
 P.R.K. cis

B-991798

D-180191  
 POLARITY  
 GUARD  
 MODIFICATION  
 N.E.