



P-90D054

BSRS350.003

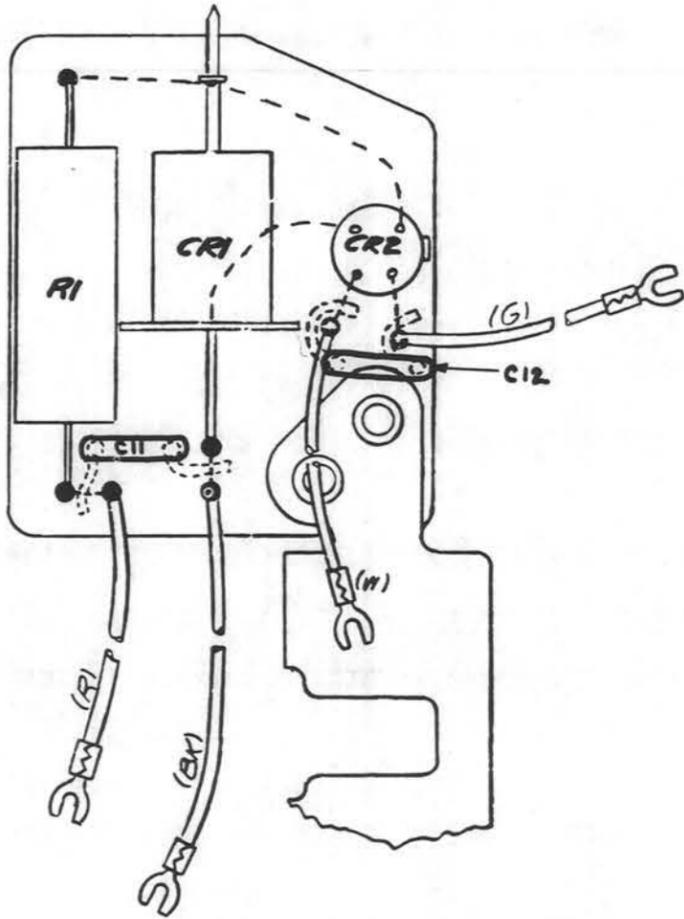

R. F. SUPPRESSION NOTES:

1. LOCATE (2) 0.01uf (KS19708-L4) CAPACITORS ON THE D-180229 POLARITY GUARD APPROXIMATELY AS SHOWN. (C11 AND C12)
2. DRILL (4) 0.025 HOLES.

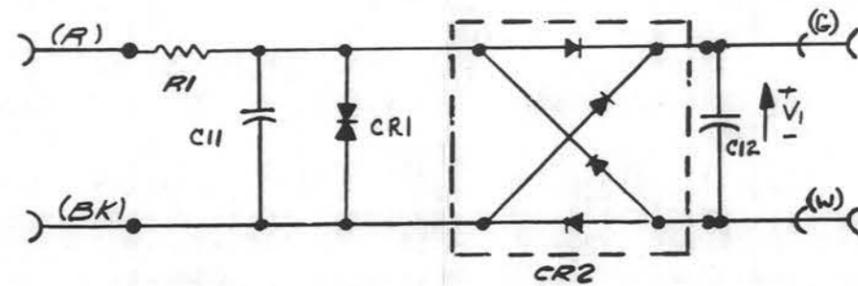

B-991797

ENGR. G. F. JACKSON GW.  
 DRAWN R. KOT  
 10-12-67 1  
 ISSUE 2 5-27-68  
 Delete Material Not Referring to R.F. Suppression  
 T.K. @ 15

2 B-991797

USED ON DWG

D-180229 POLARITY GUARD MODIFICATION

N.T.S.

WESTERN ELECTRIC CO. INC. ENGINEER OF MANUFACTURE

SUPERSEDES P-21F67E

CDS B-991797

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NON-MILITARY DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED TO 3 DECIMAL PLACES AS ANGLES FOR GENERAL INFORMATION ON SYMBOLS AND NOTES REFER TO MANUFACTURING STANDARD 18.003, PART 2 SECTION 2ST.

35