

BELL SYSTEM PRACTICES
Teletypewriter and Data Stations

ADDENDUM P34.307
Issue 1, October, 1963
AT&TCo Standard


28 PERFORATOR-TRANSMITTER-BASE

WIRING DIAGRAM

1. GENERAL


1.001 This addendum supplements Section P34.307, Issue 4.

1.002 This addendum is issued to add the wiring for the 28G-1 and 28K perforator-transmitter-bases. The drawing showing the wiring for the 28D, 28E, 28F and 28K perforator-transmitter-bases was changed to (a) remove the jumper wire on the K-KT-T switch, (b) add a white-purple (W-P) wire from terminal 3 of the K-KT-T switch to terminal 7 of the keyboard terminal block and (c) add a jumper between terminals 1 and 7 of the keyboard terminal block.

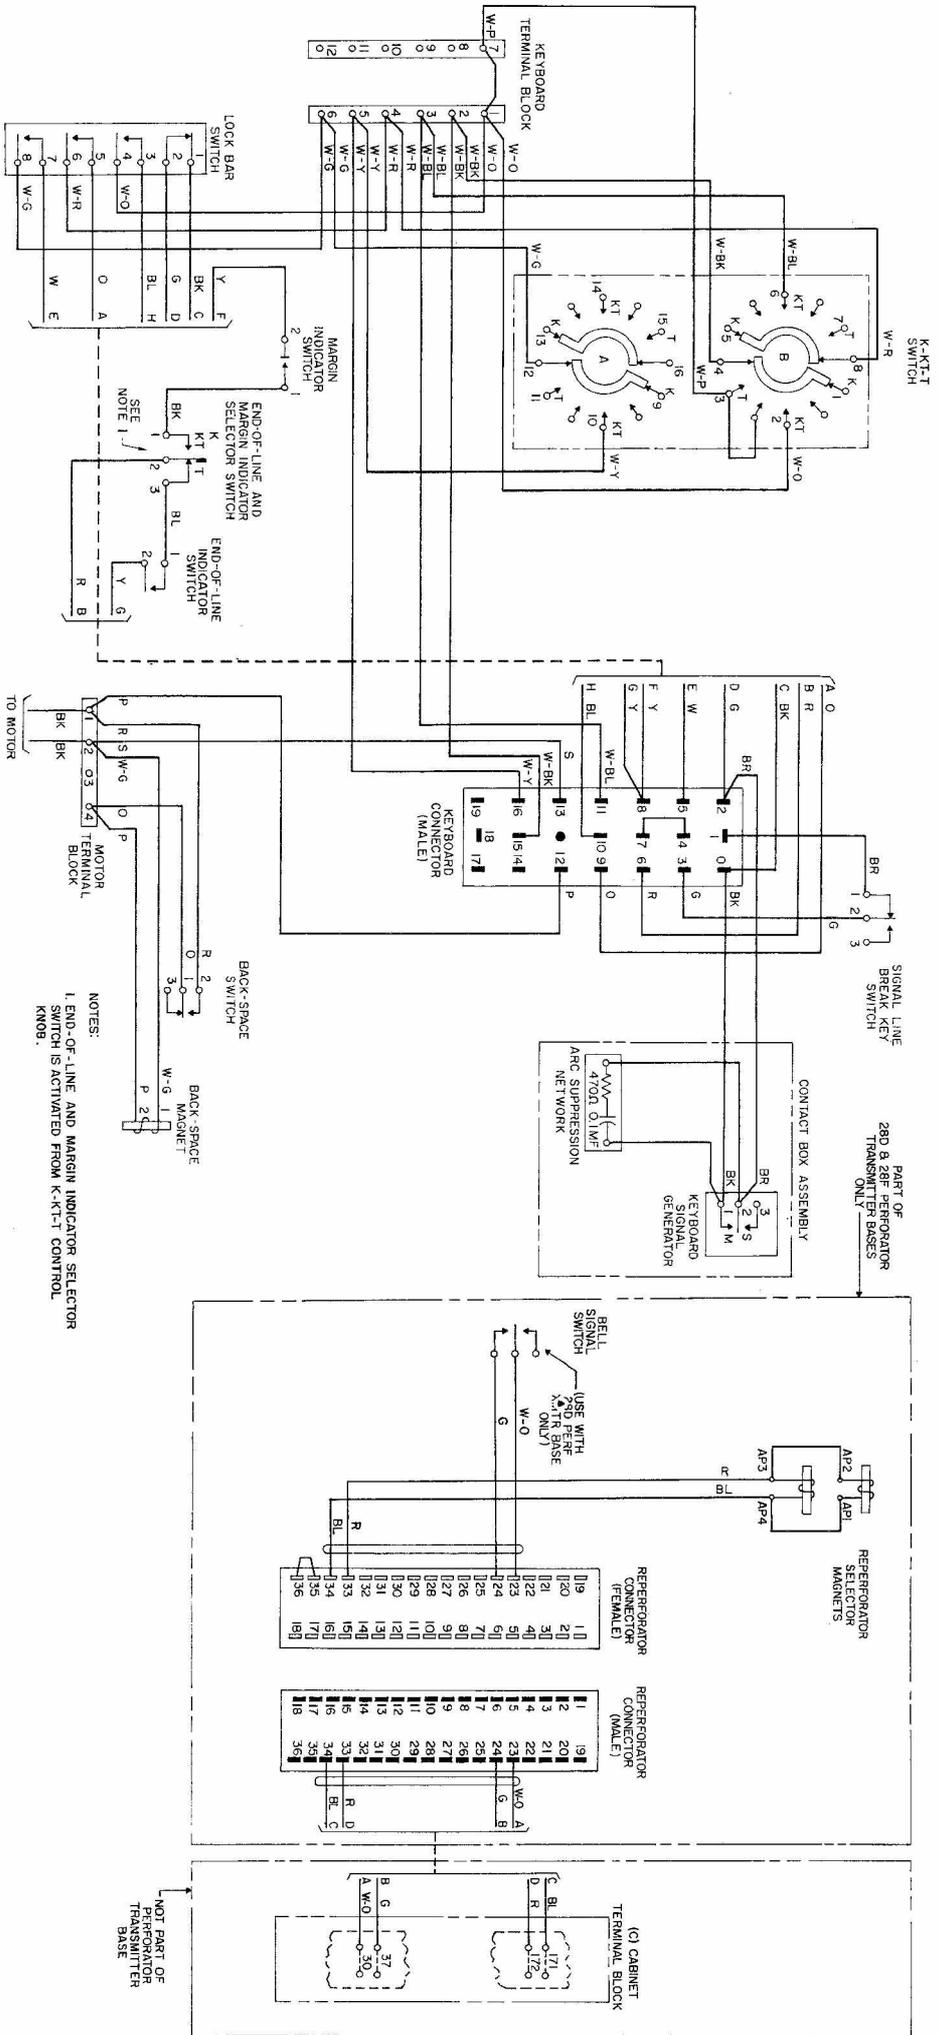


28D, E, F and K Perforator-Transmitter-Bases

NOTES:
 1. END-OF-LINE AND MARGIN INDICATOR SELECTOR KNOB IS ACTIVATED FROM K-K-T CONTROL KNOB.

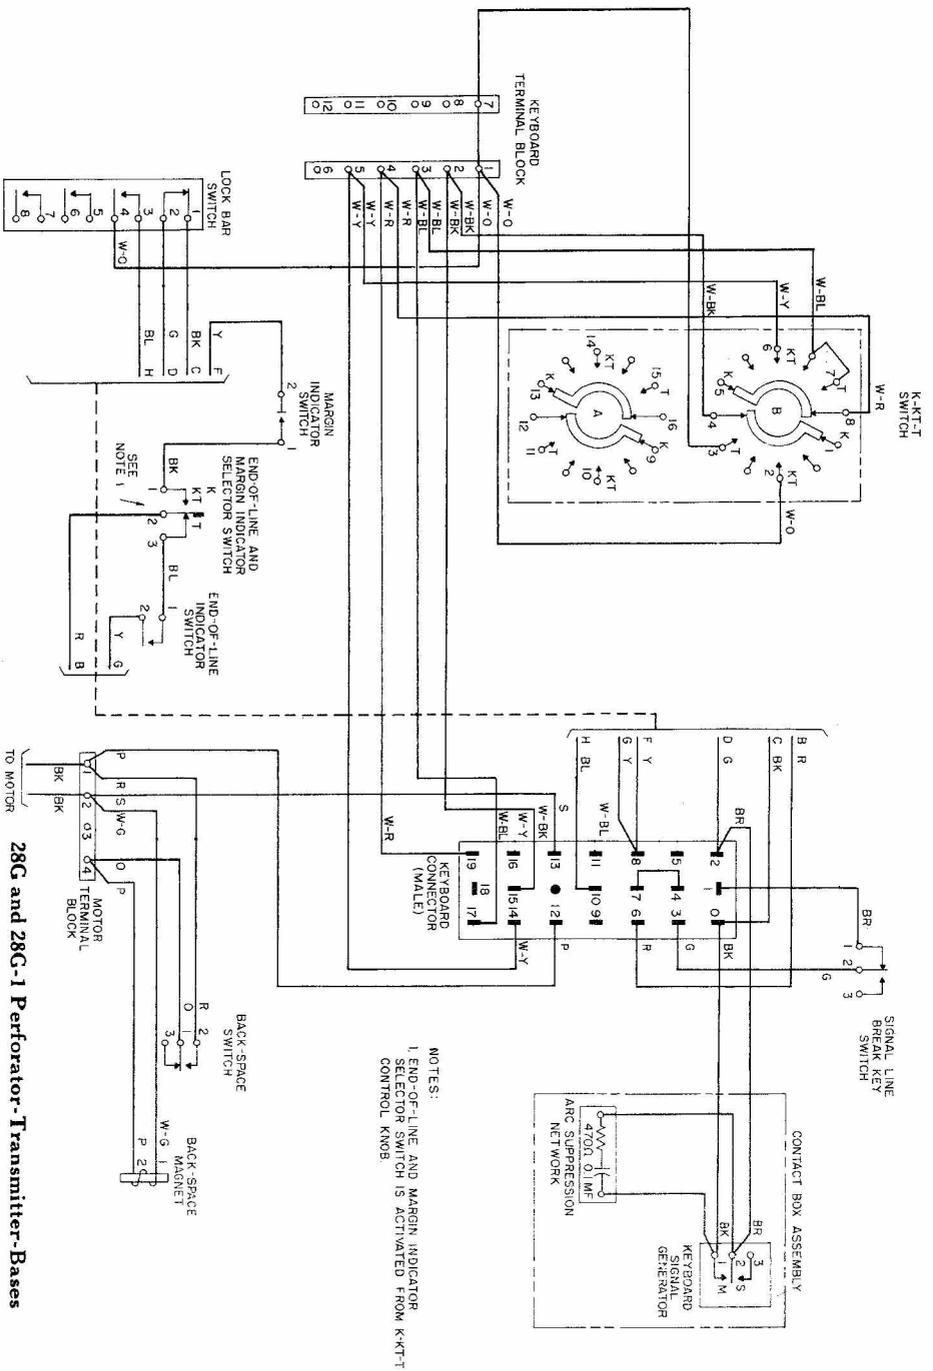

NOTES:
 1. END-OF-LINE AND MARGIN INDICATOR SELECTOR SWITCH IS ACTIVATED FROM K-KT-T CONTROL KNOB.

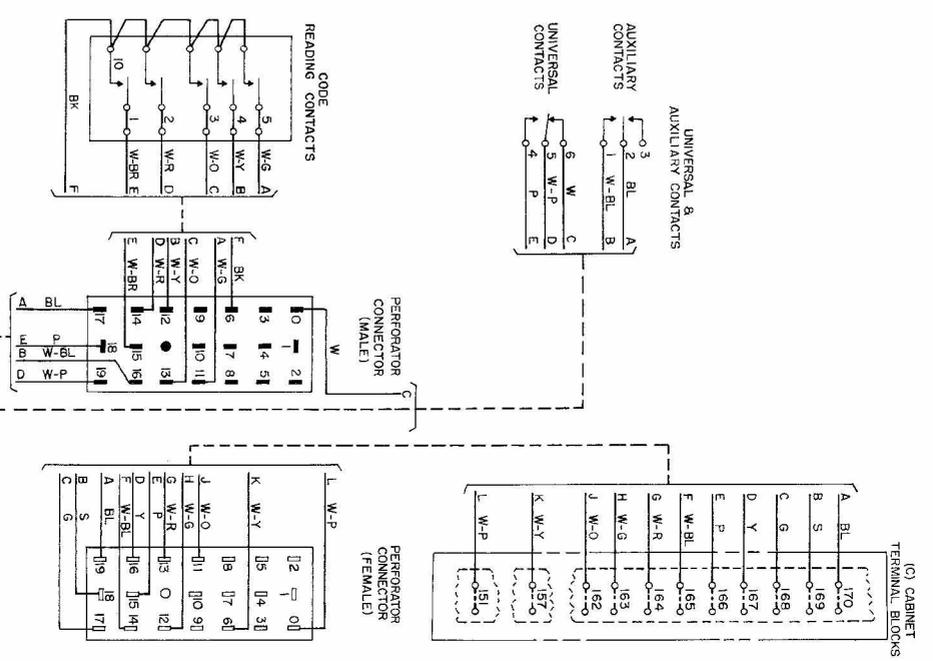

28G and 28G-1 Perforator-Transmitter-Bases