

**BELL SYSTEM PRACTICES**  
**Teletypewriter and Manual**  
**Telegraph Station and P.B.X.**  
**Installation and Maintenance**

**SECTION P36.111**  
**Issue 1, September, 1945**  
**AT&T Co Standard**

## **BRACKET FOR MOUNTING 15A PAPER BOX ON NO. 19-TYPE TABLE**

### **1. GENERAL**

1.01 This section gives a description of a bracket which may be used to mount a 15A paper box on the No. 19-type table and tells how to mount it.

1.02 Since the demand in the field for this type of an arrangement is not large it would be most economical to provide the bracket locally where it is required. This section gives the detailed instructions for its fabrication.

### **2. DESCRIPTION**

2.01 Fig. 1 shows the materials required to make up the bracket and the manner in which they are assembled. The bracket consists of:


1. One front bracket
2. One rear bracket
3. Two R.H. 10-32 screws (3/4")
4. Two Lock Washers (1/4")

2.02 Fig. 1 shows the dimensions of the front and rear bracket. The bracket should be finished to approximately match the grille on which it is fastened.


### 3. INSTALLATION

3.01 The bracket is mounted on the grille on the second row of openings from the top with the left-hand mounting screw in the fifth hole from the left. Before the screws are tightened observe that the bracket is in the lower part of the hole and the screws are resting along the bar of the grille. See Fig. 2 for the position of the bracket on the grille. (As shown in Fig. 2 the grille has 13 holes by 29 holes. In the older grilles—10 x 22—the location of left-hand bracket screw is the 4th hole from the left.)

MOUNTING BRACKET FOR 15A PAPER BOX  
ON 19A TELETYPEWRITER TABLE

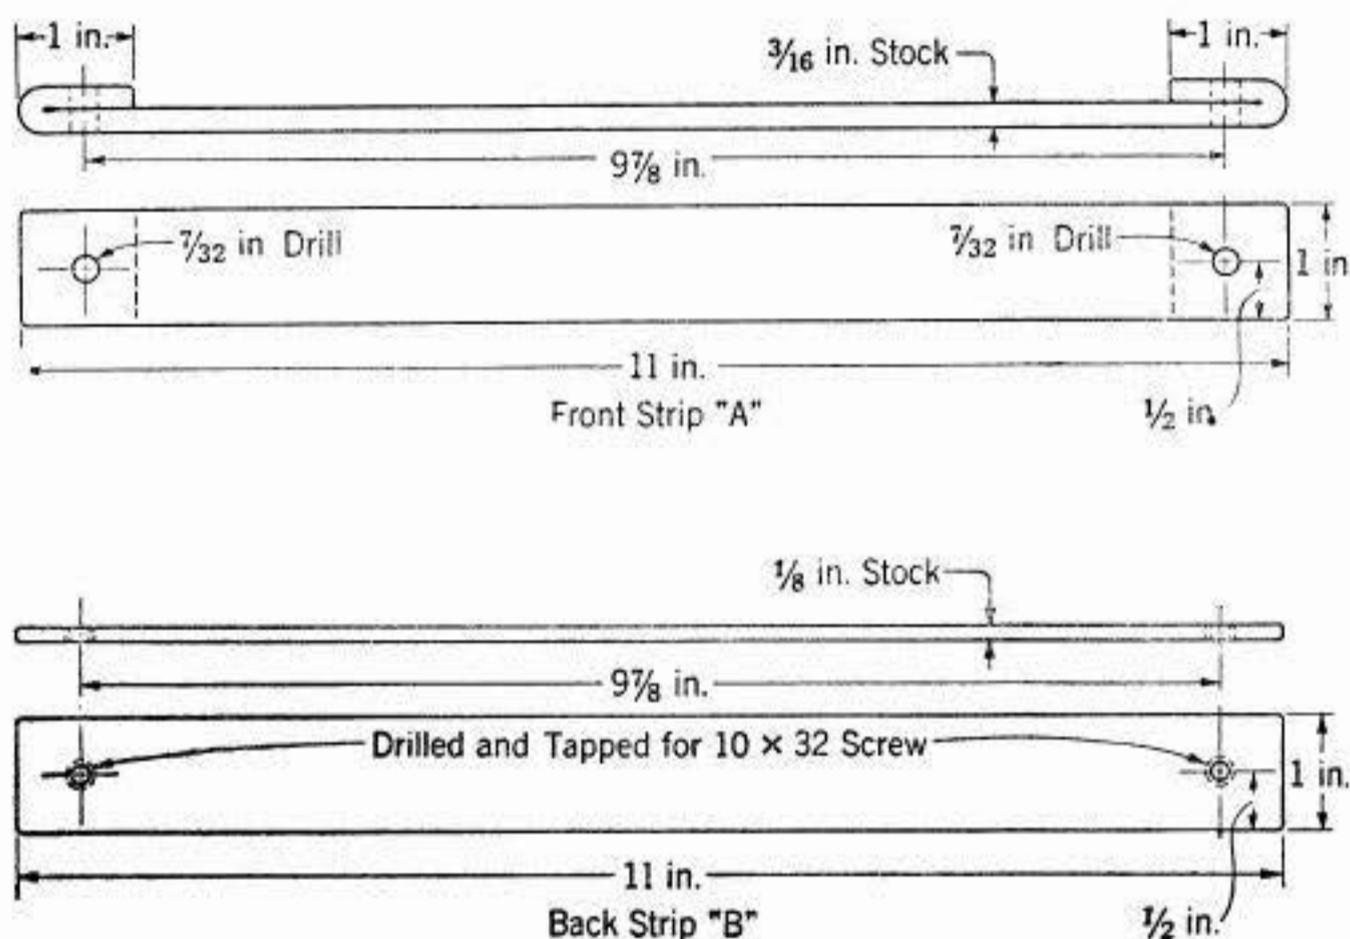

**Fig. 1**

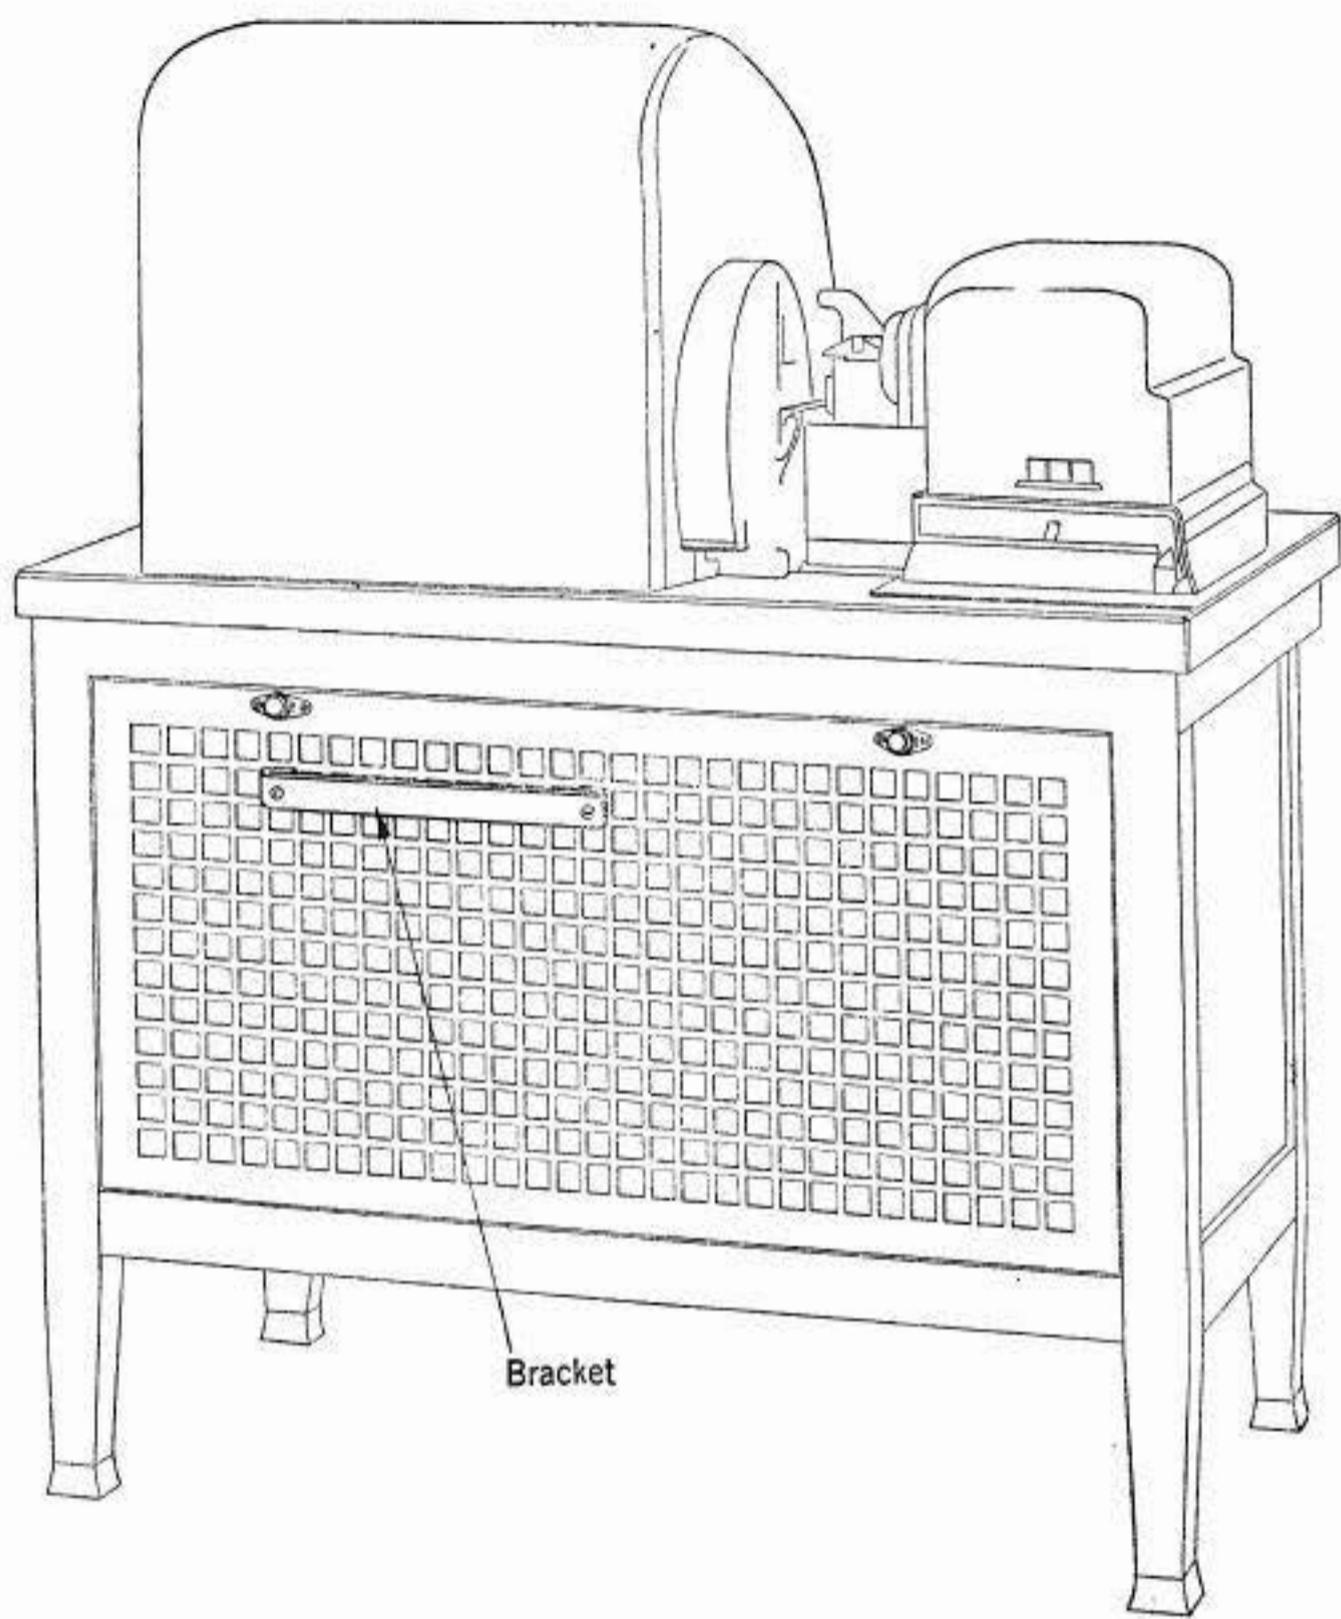

**Fig. 2**