
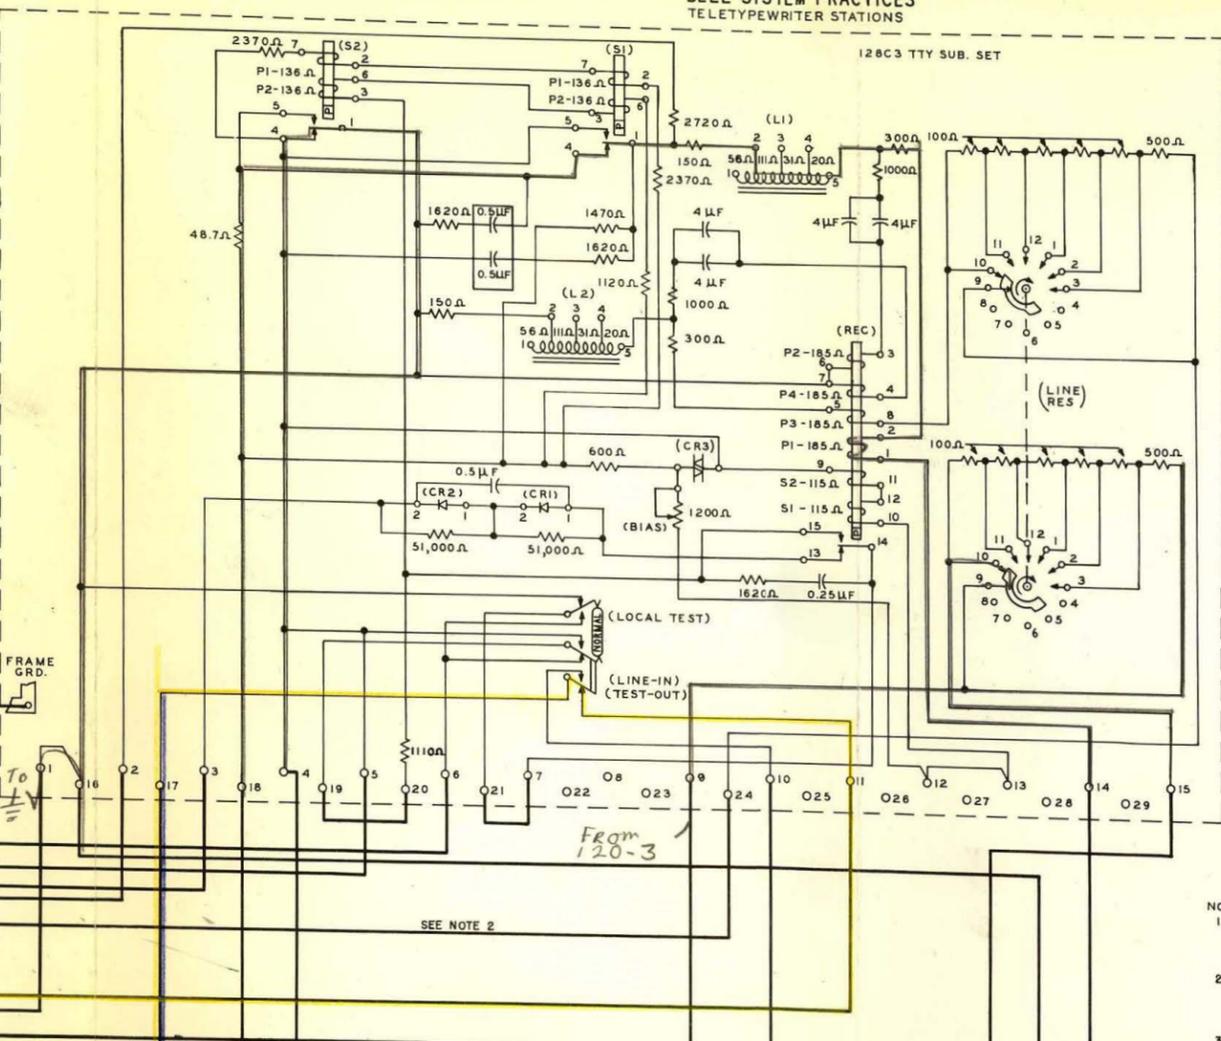
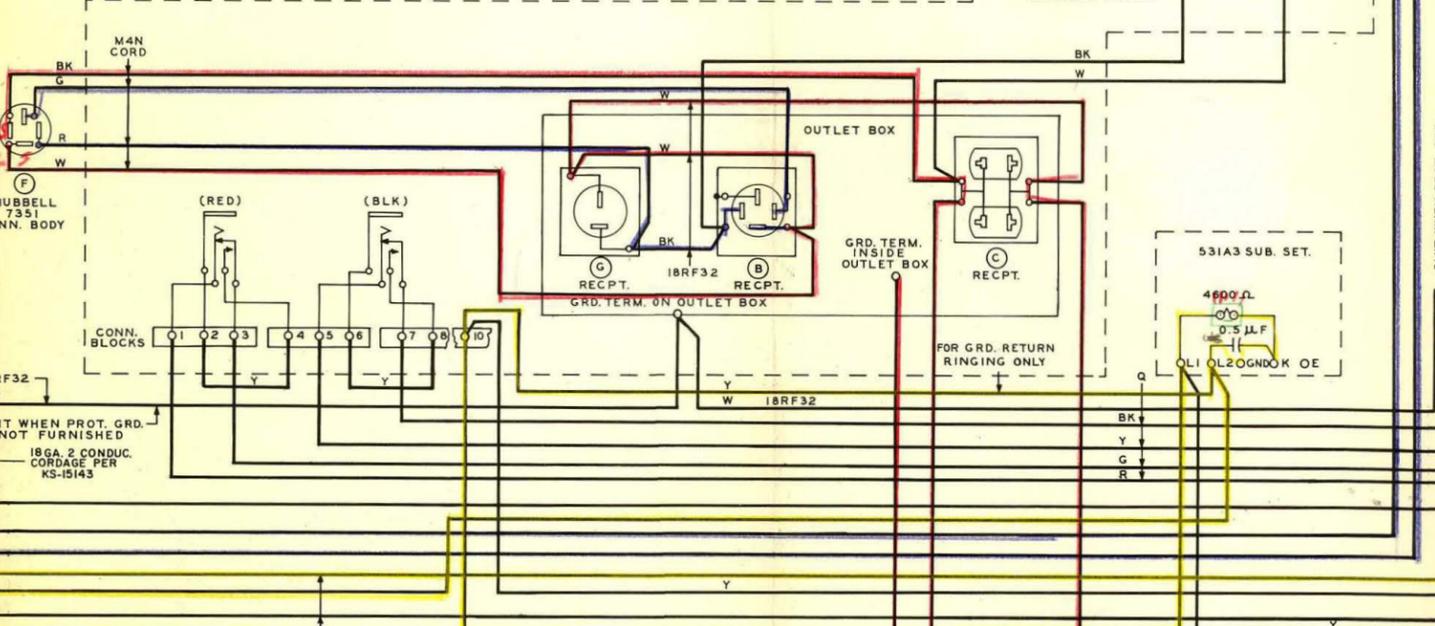
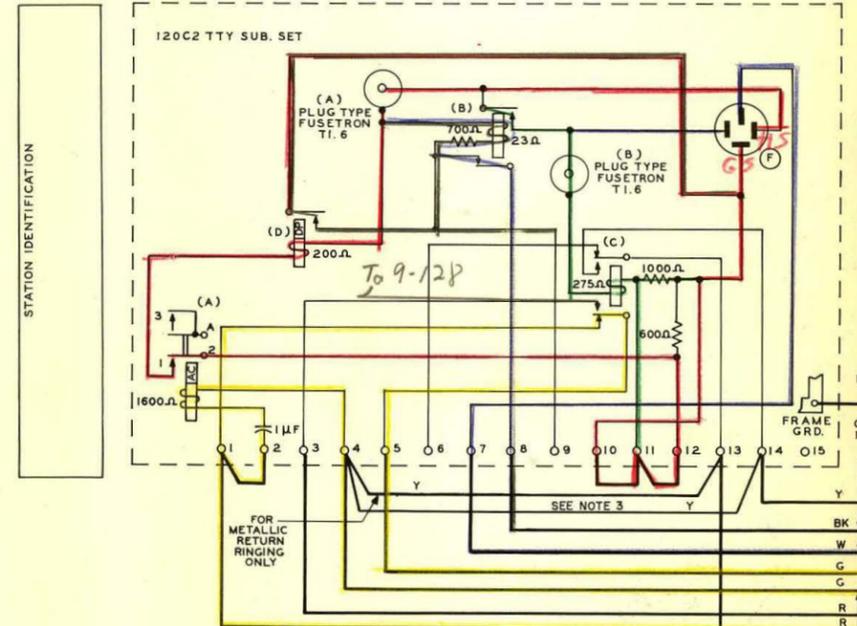
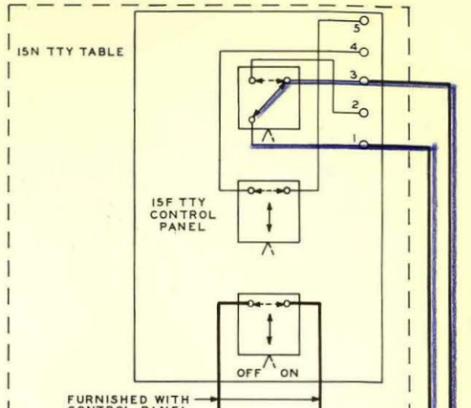


BELL SYSTEM PRACTICES  
TELETYPEWRITER STATIONS

SECTION P90.516  
ISSUE: 3 MARCH 1954  
AT&T CO. STANDARD

TABLE A

PLANS USED	
M2.21	M2.43
M2.22	
M2.24	
M2.30	

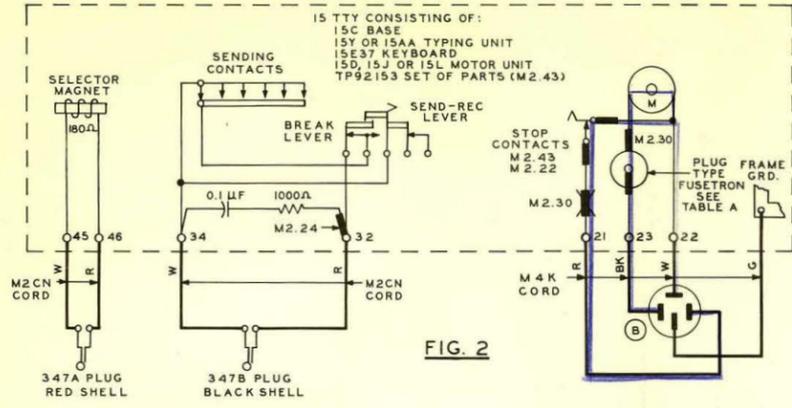

119/60C  
RINGING

- NOTES:
- ALL COLORED WIRES UNLESS OTHERWISE SPECIFIED ARE 22 GAUGE BROWN TYPE GS STATION WIRE, PER AT&T CO SPEC. 7089.
  - THE YELLOW WIRE BETWEEN TERMINAL 14 (120C2 SET) AND TERMINAL 24 (120C3 SET) IS REQUIRED ONLY FOR SINGLE STATION OPERATION WITH A NEUTRALIZING CONDUCTOR.
  - THE YELLOW WIRE BETWEEN TERMINAL 4 AND 14 (120C2 SET) IS REQUIRED ONLY FOR 2 WIRE MULTI-STATION OPERATION WITH A CONTROL CONDUCTOR.

