

DF
5AA
5M
5H
DARD
LINE-TEST
N REQ

FOR SEND REC
TTY ONLY





FIG. 6

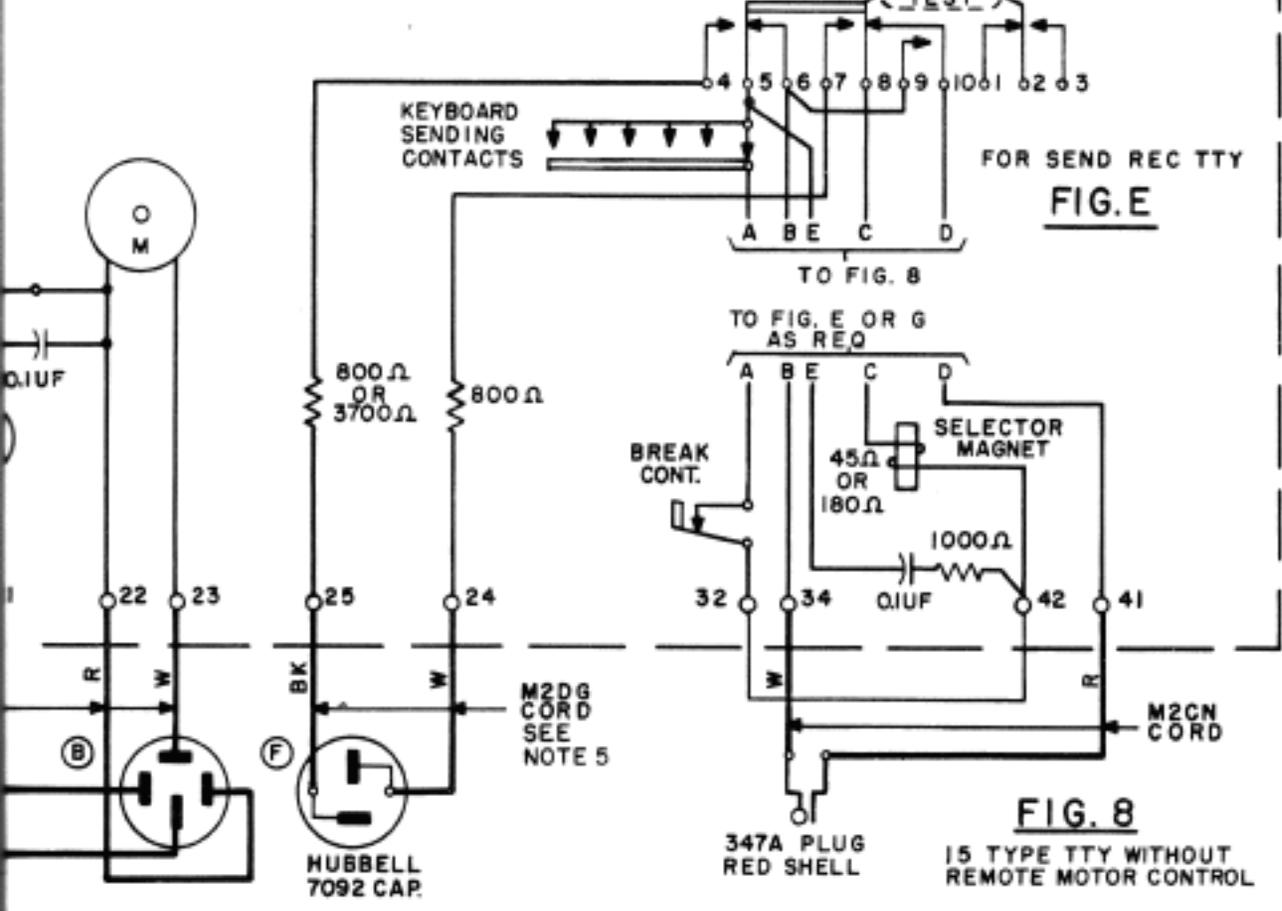

15 TTY CONSISTING OF
15C BASE
15D OR 15E KEYBOARD
(SEND-REC TTY ONLY)
15U, 15W, 15Y OR 15AA TYPING UNIT
15P, 15J, 15L OR 15M MOTOR UNIT
15A, 15C, 15G OR 15H SET OF GEARS
TP96892 SET OF UPPER CASE "M"
MOTOR CONTROL PARTS
TP112549 SET OF LINE-TEST KEY
PARTS (SEND-REC TTY ONLY)








FIG. 10

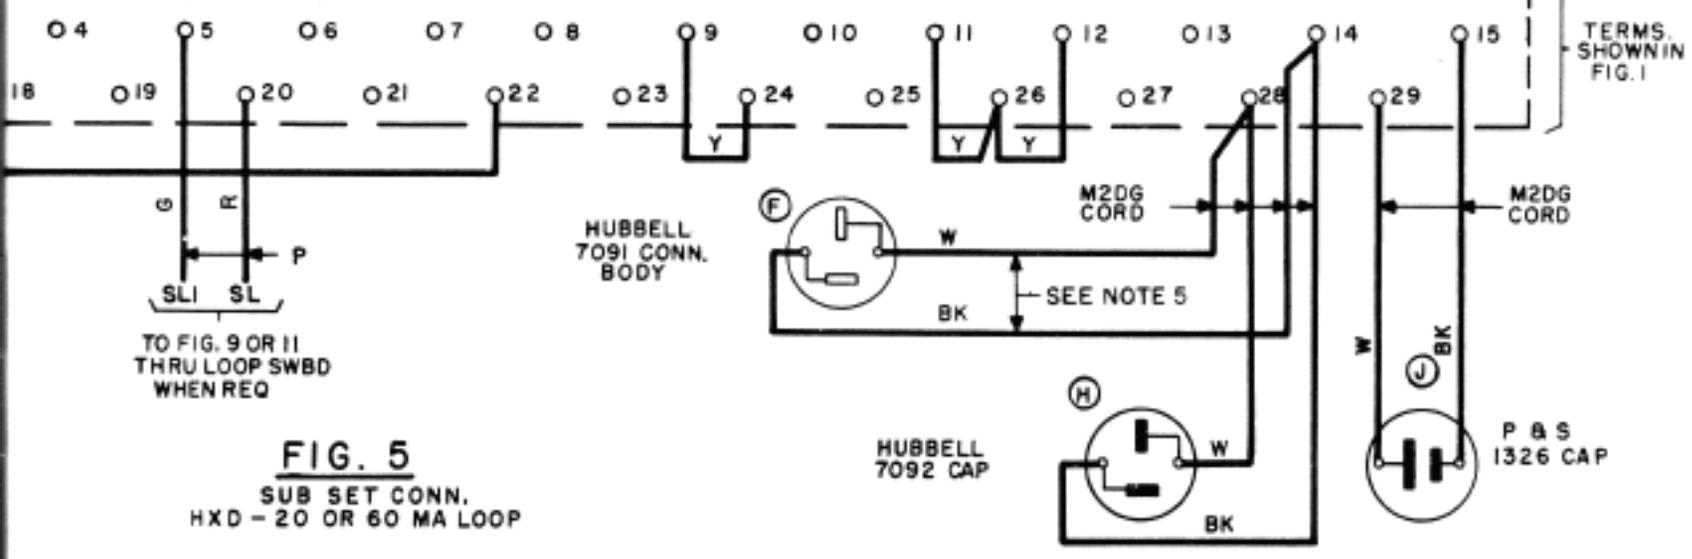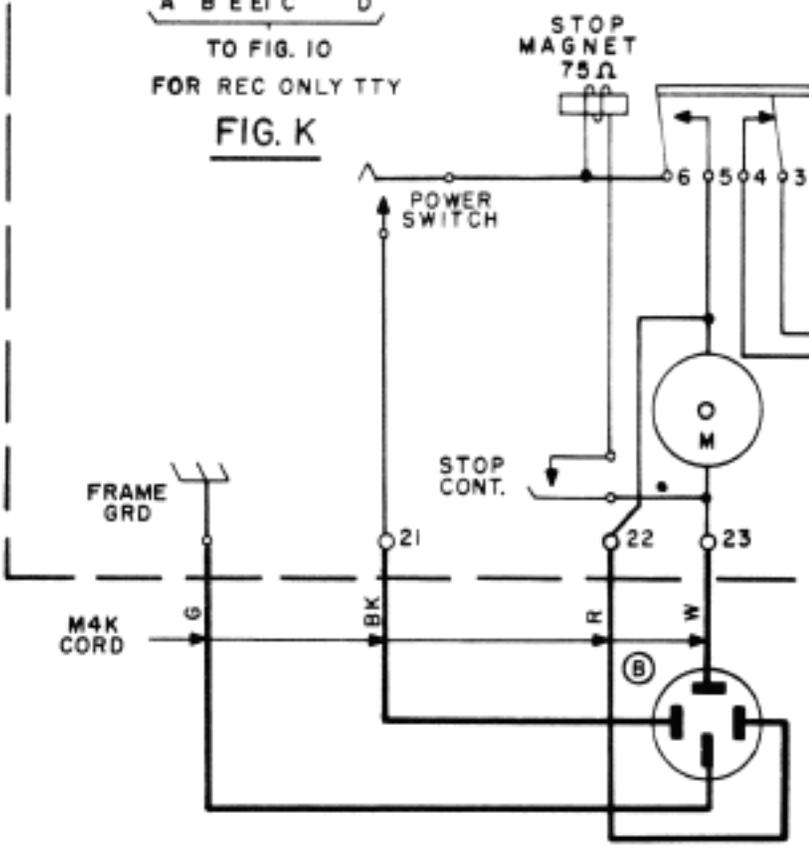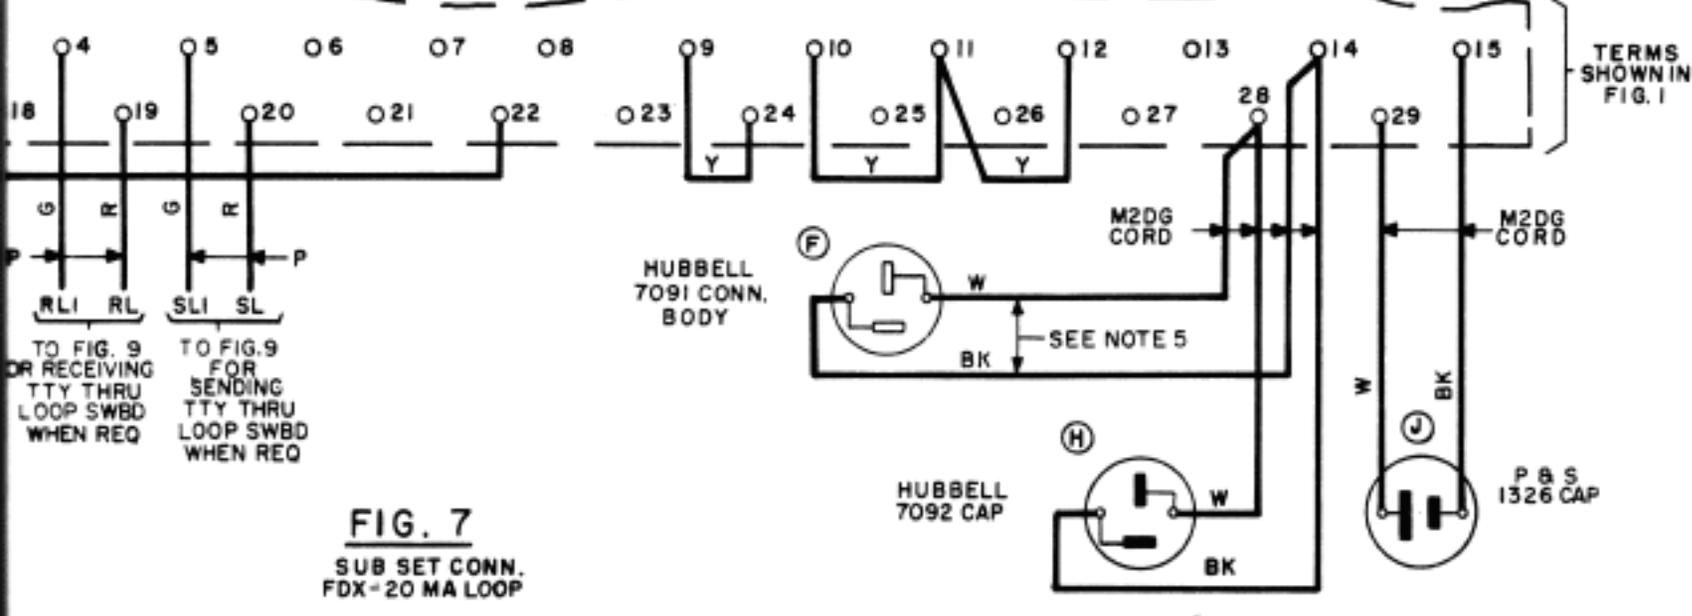


15N TTY TABLE OR
TP 126287 ELECTRICAL
SERVICE ASSEMBLY
IN XRT 200 OR XRT 201
TTY TABLE


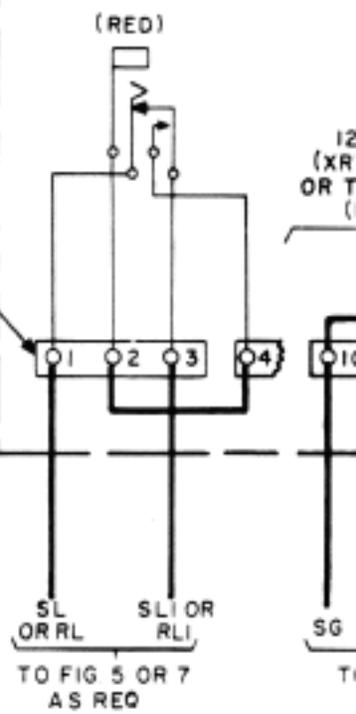


TO FIG. 9
OR RECEIVING
TTY THRU
LOOP SWBD
WHEN REQ


TO FIG. 9
FOR
SENDING
TTY THRU
LOOP SWBD
WHEN REQ

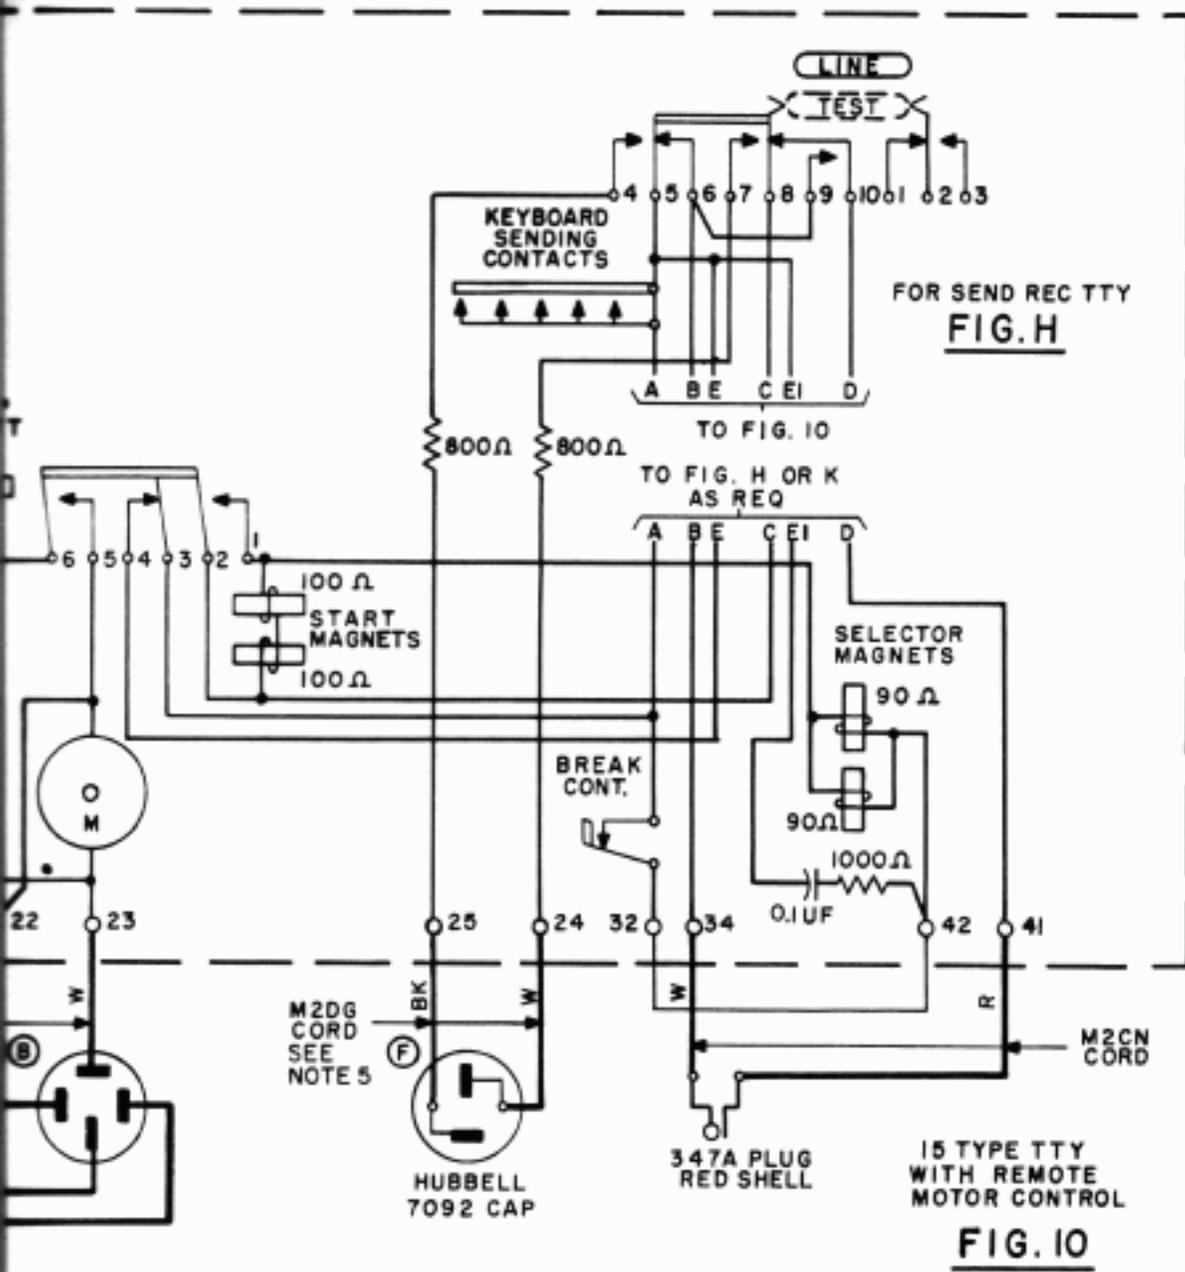

15N TTY TABLE OR
 TP126287 ELECTRICAL
 SERVICE ASSEMBLY
 IN XRT 200 OR XRT 201
 TTY TABLE

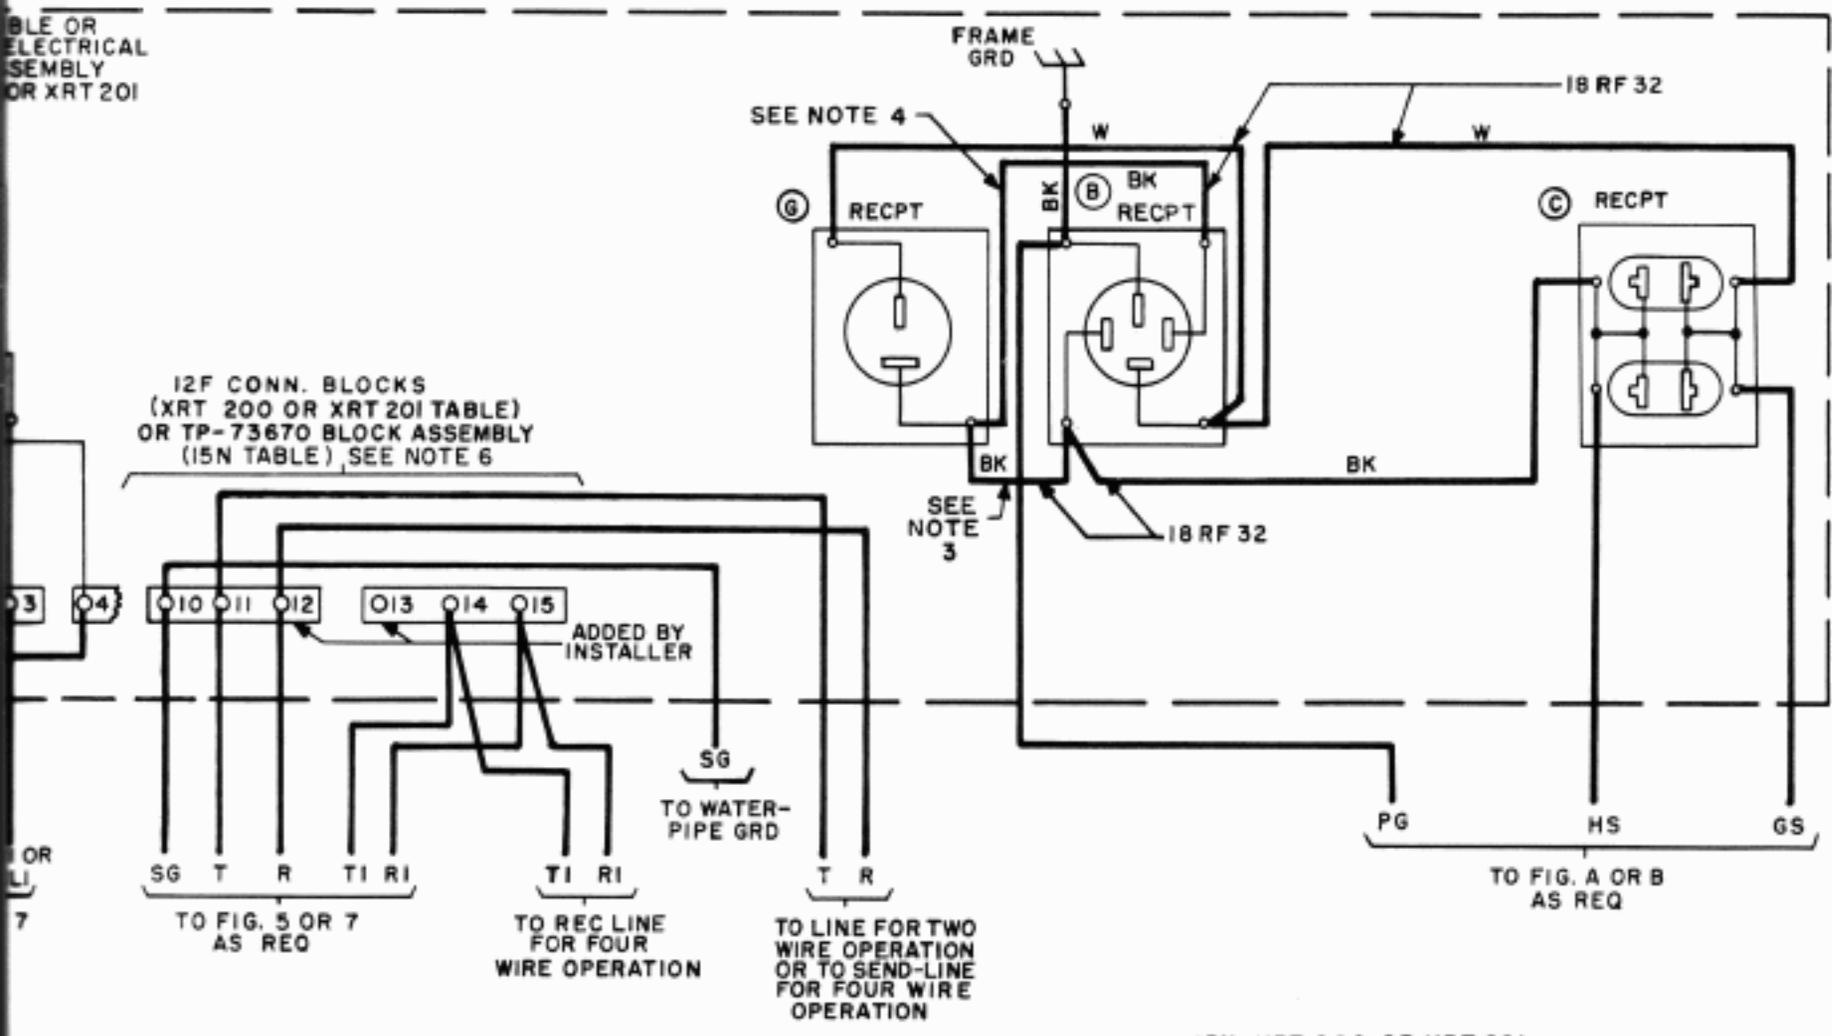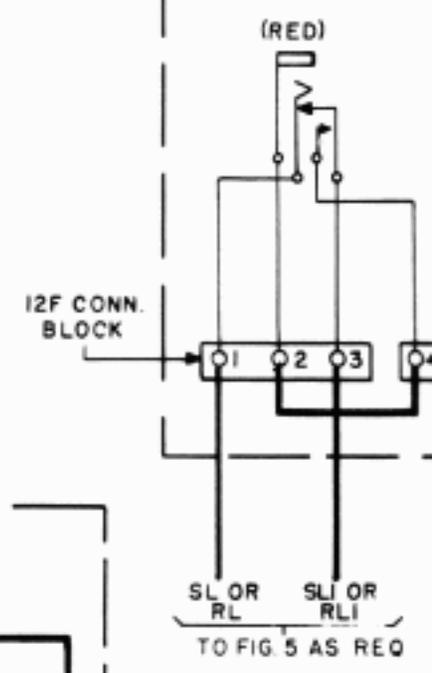

15N, XRT 200 OR XRT 201
 TTY TABLE
FIG. 9

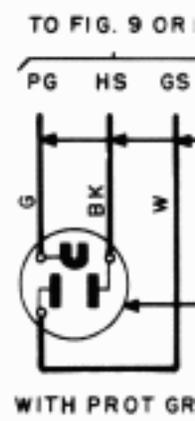

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL COLORED LEADS SHALL BE 22GA. BROWN, TYPE GS STATION WIRE PER AT & T CO SPEC 7089.
2. ADJUSTMENT OF THESE REACTANCES IS DESCRIBED IN THE BSP.
3. THIS STRAP SHALL ONLY BE PROVIDED WHERE 130V RECTIFIER FOR THE 130B2 SUB SET IS NOT TO BE UNDER THE CONTROL OF THE TELETYPEWRITER POWER SWITCH
4. THIS STRAP SHALL ONLY BE PROVIDED WHERE THE 130V RECTIFIER FOR THE 130B2 SUB SET IS TO BE UNDER THE CONTROL OF THE TELETYPEWRITER POWER SWITCH
5. REQUIRED ONLY WHEN LOCAL TEST FEATURE IS FURNISHED.
6. FOR FULL DUPLEX OPERATION MOUNT THE 130B2 SET AND THE ADDED CONNECTING BLOCKS ON THE TABLE OF THE SEND-RECEIVE TTY.

MOTOR	FUSETRON
A-C SYNCH	T 3.2
A-C SER.	T 1.6

TABLE A

"M" PLANS USED	
M2.06*	M2.49*
M2.23	M2.52*
M2.29B*	
M2.44*	

TABLE B
* WHEN REQUIRED

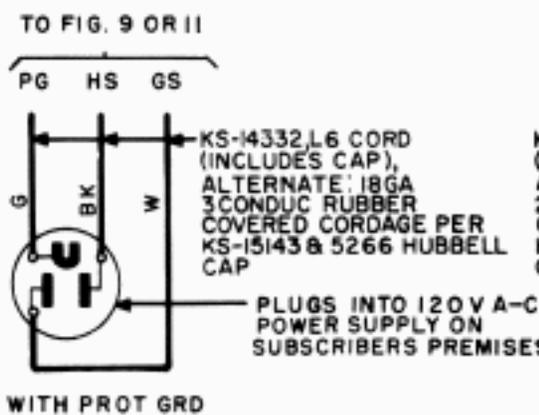
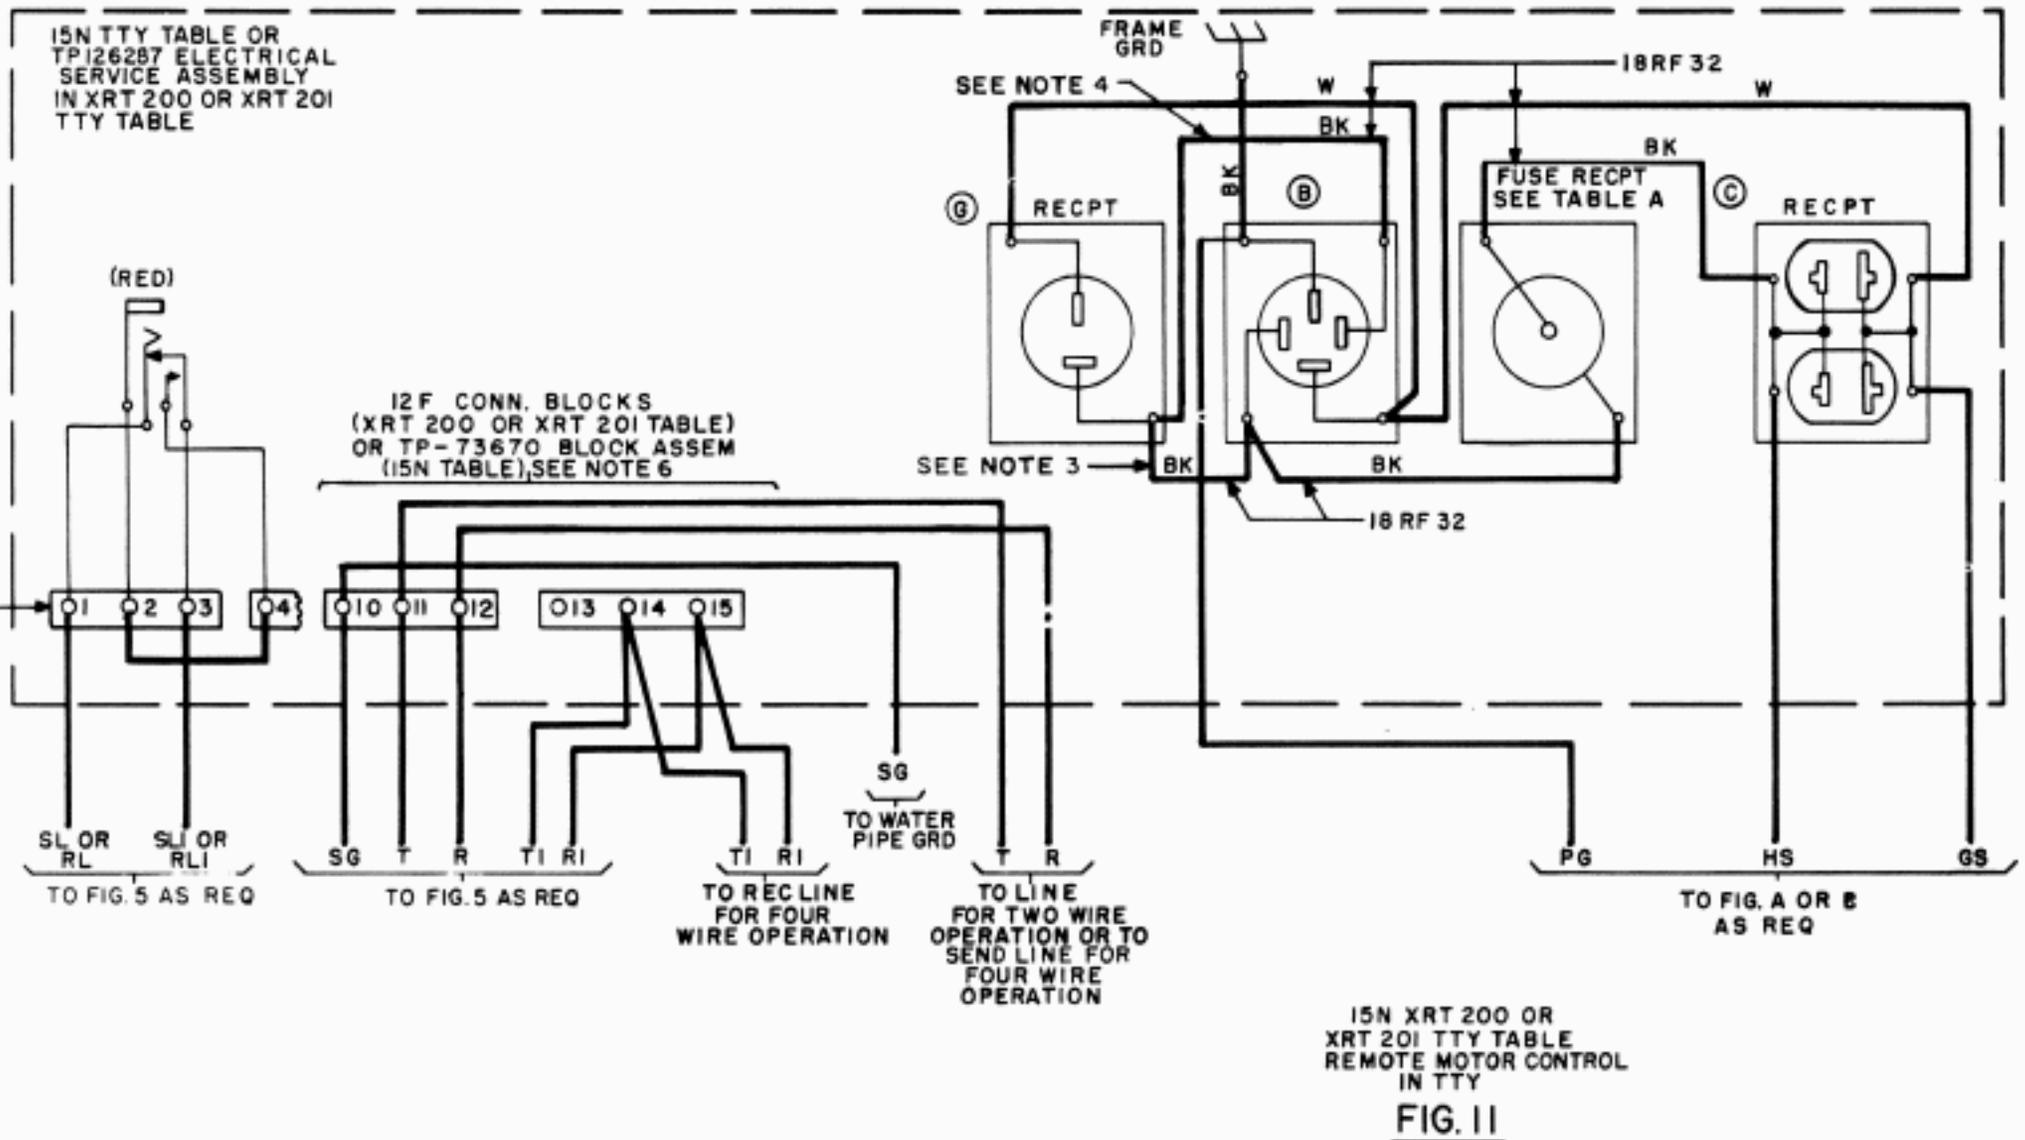


FIG. A

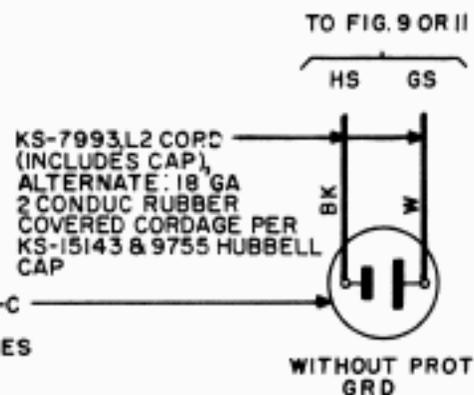


FIG. B

TTY STATION WIRING
130B2 TTY SUB SET
PRIVATE LINE SERVICE
15 TTY & 15N, XRT200,
OR XRT201 TABLE