

STATION IDENTIFICATION





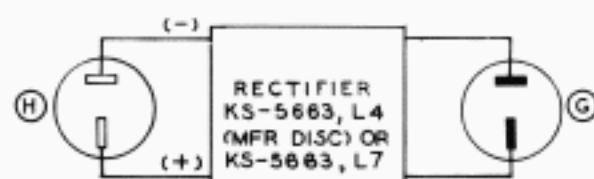


FIG. 3

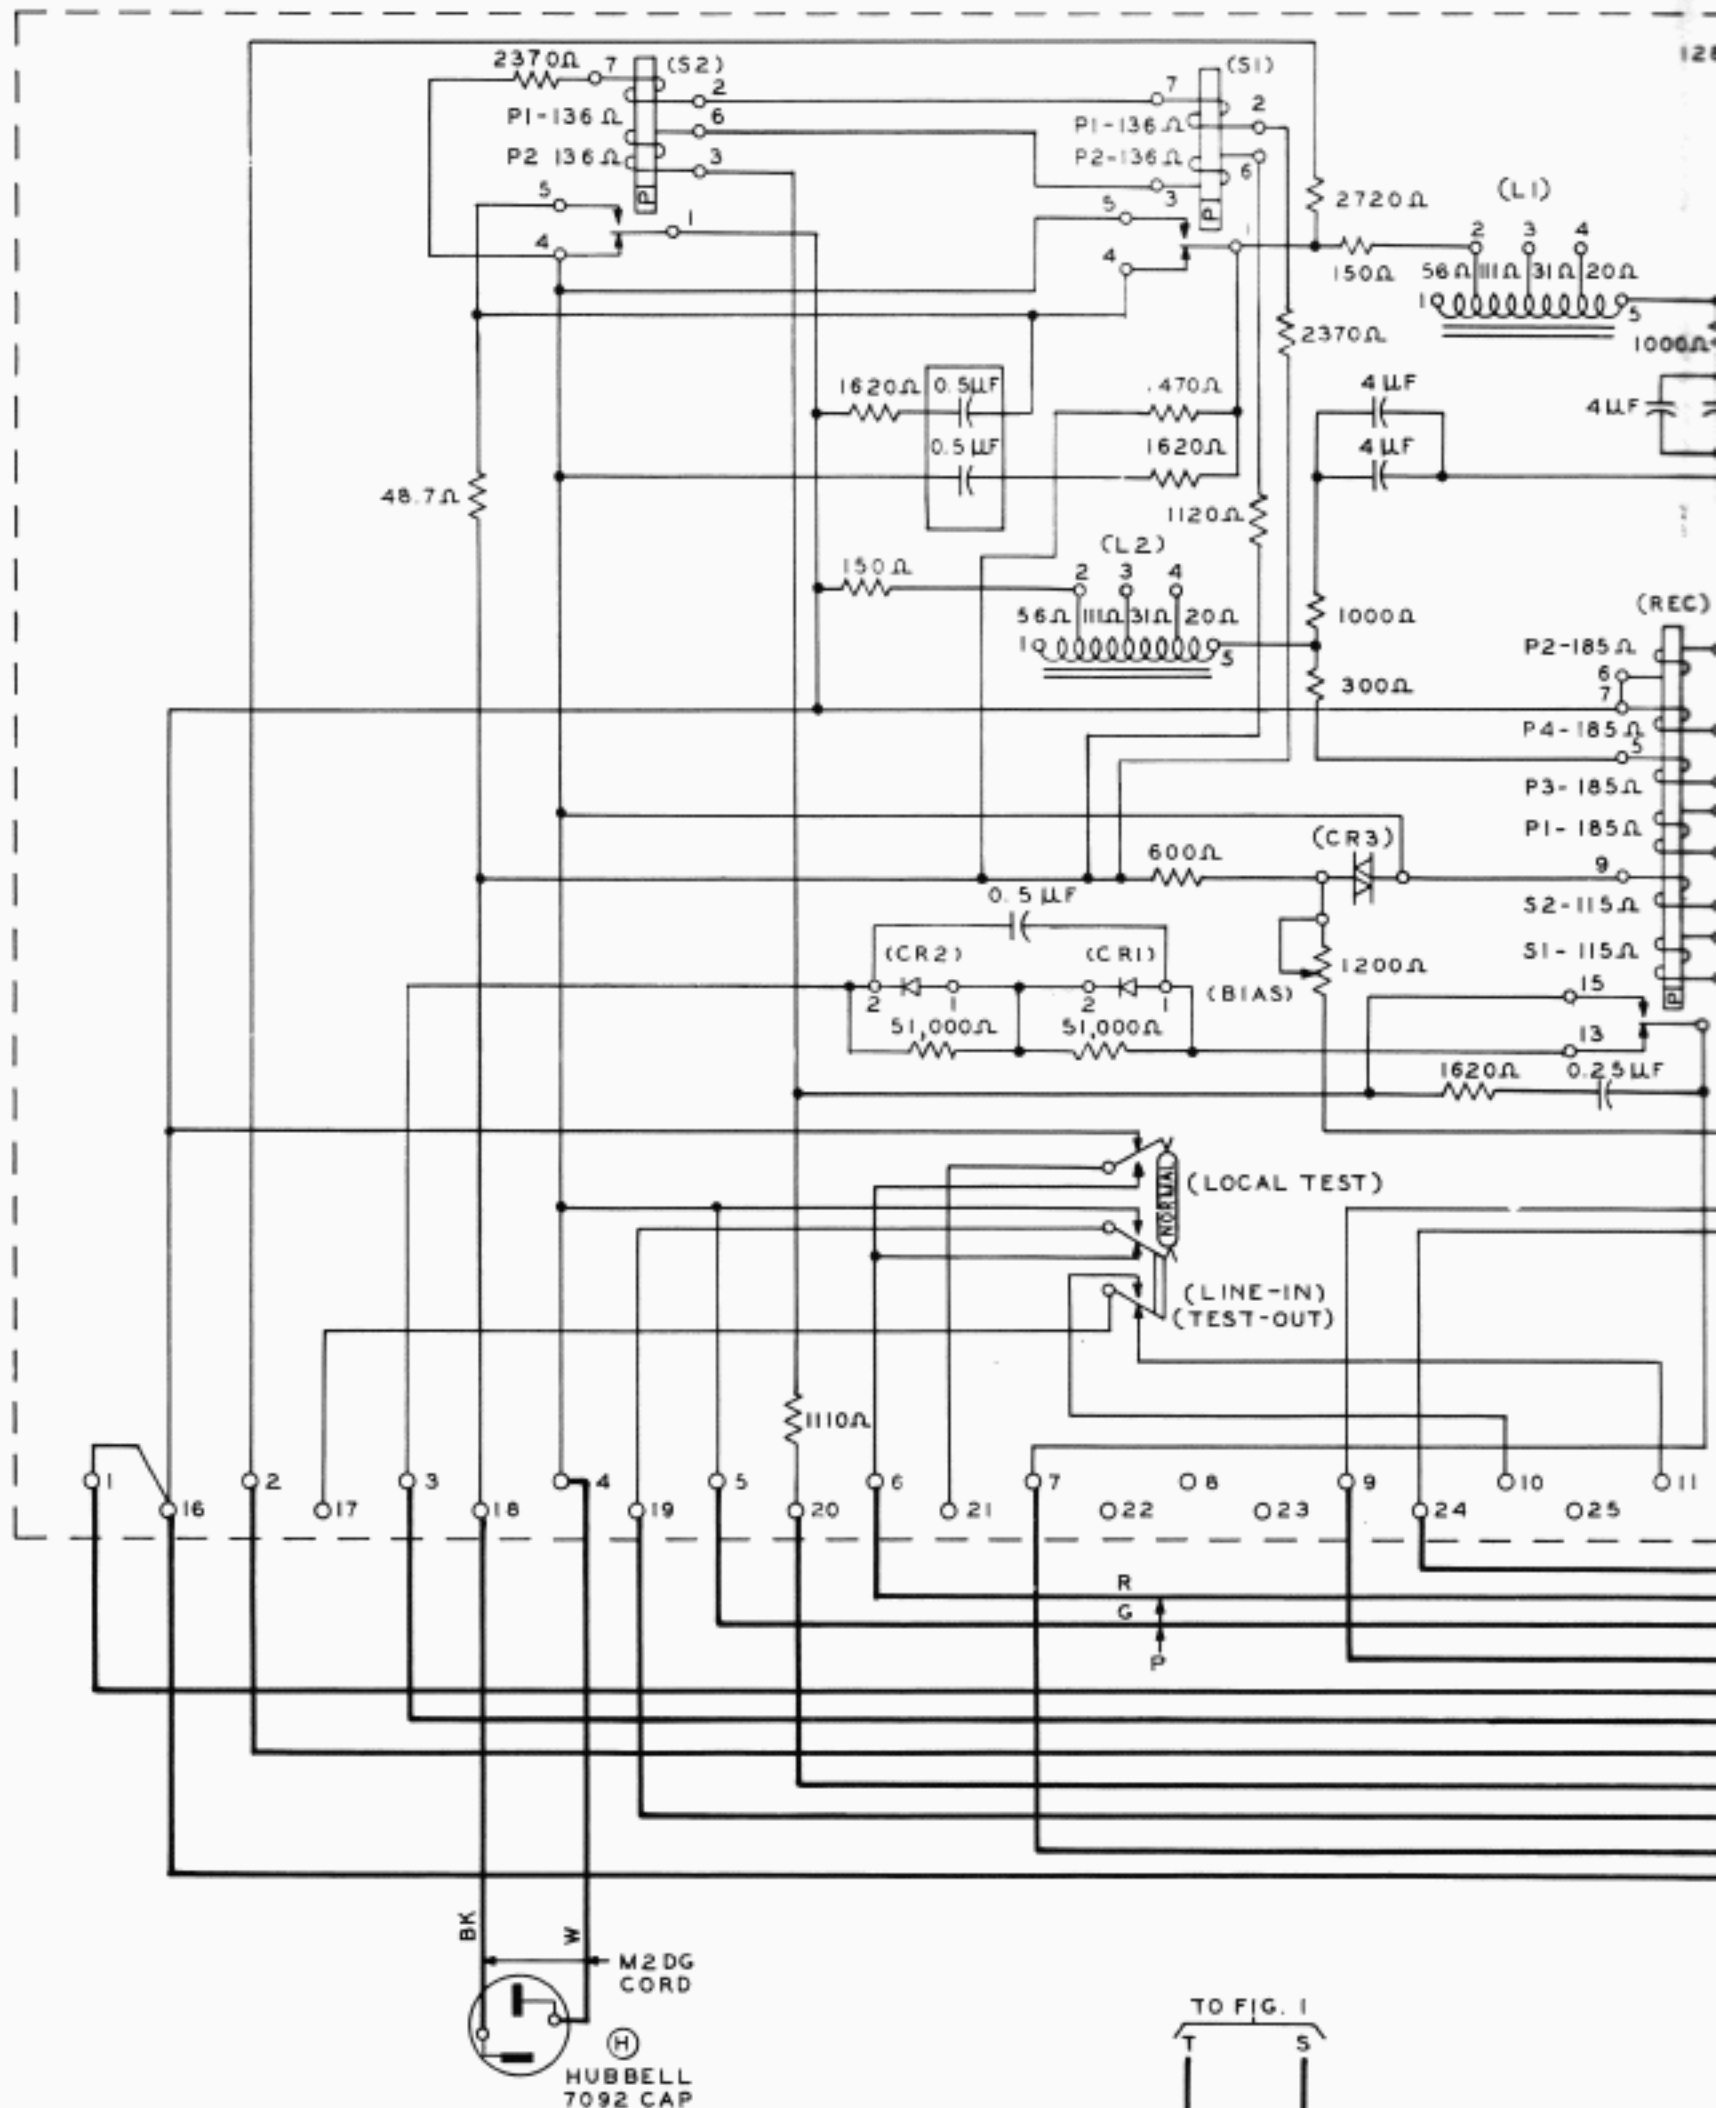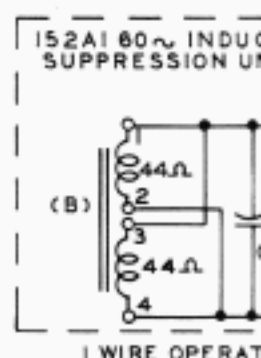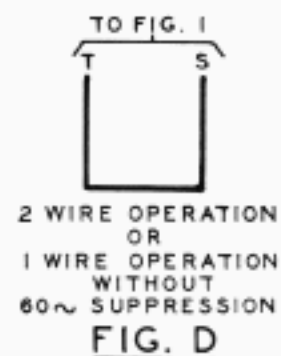

128C3 TTY SUB. SET

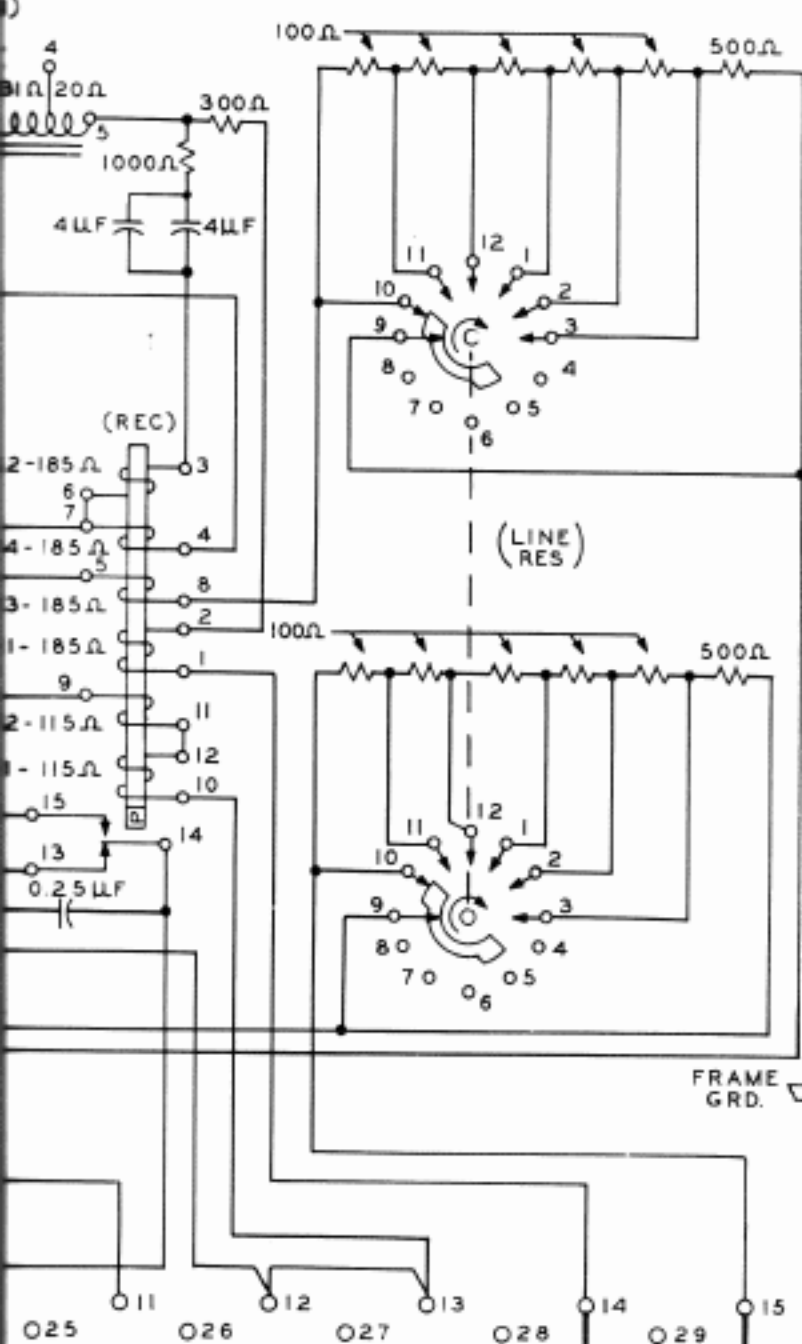

19 TTY CONSISTING OF:
 15C BASE
 15Y OR 15AA TYPING UNIT
 15L38 OR 15T38 PERFORATOR TRANSMITTER
 15D, 15J OR 15L MOTOR UNIT



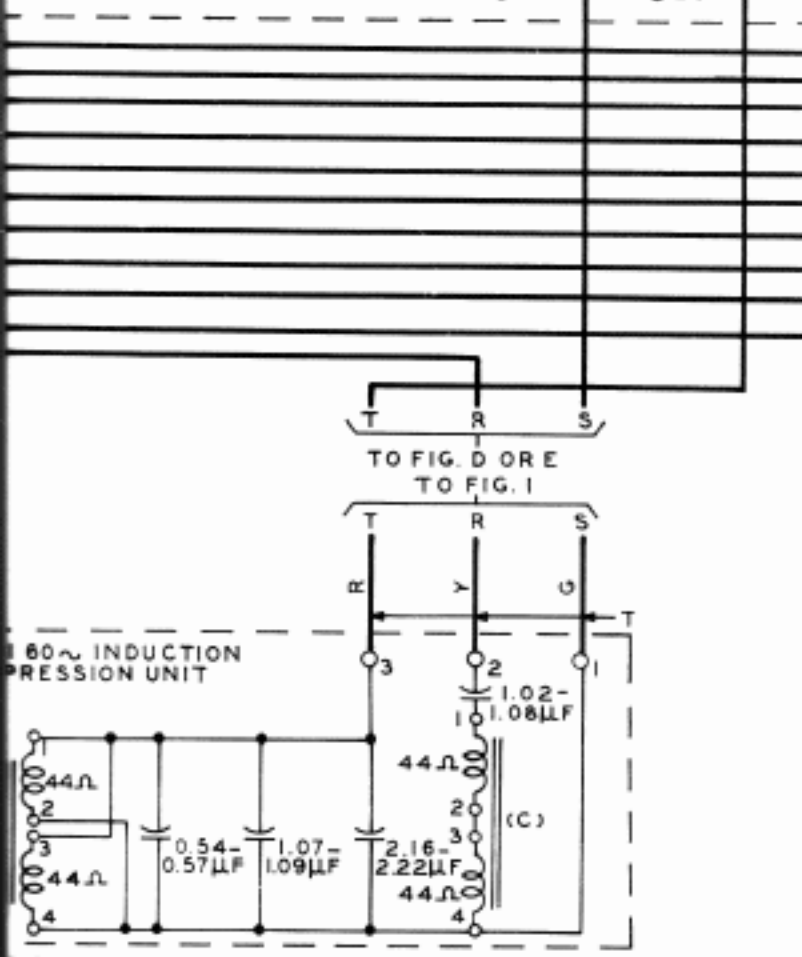


FIG. E

FRAME GRD.

18RF32

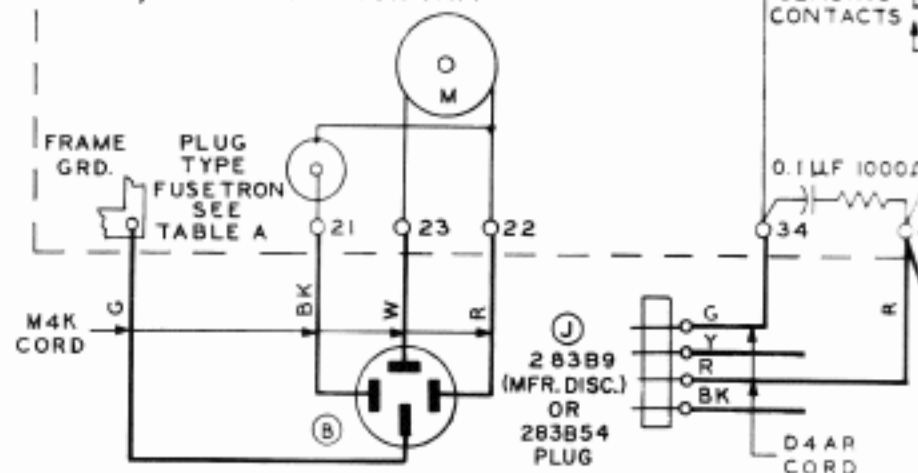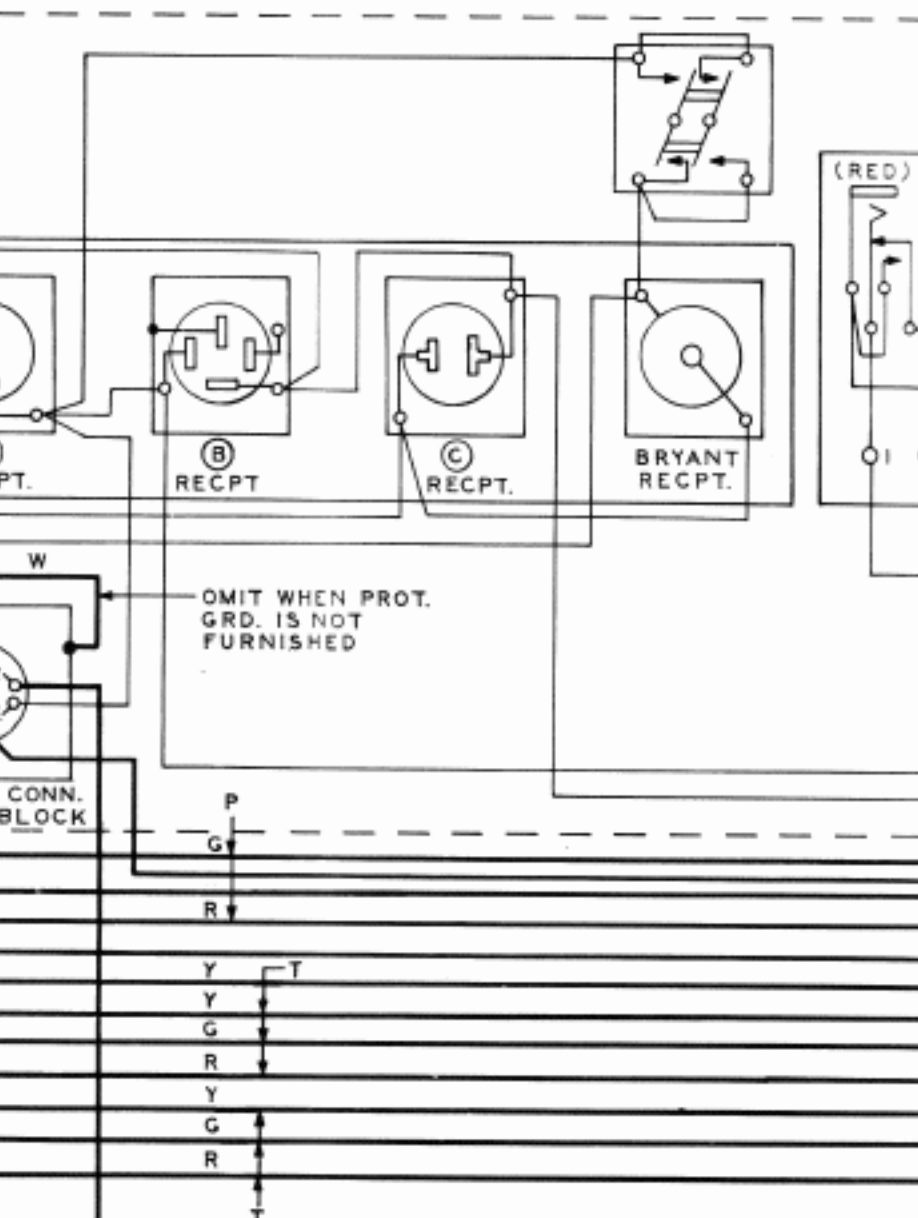

HUBBELL
 7091
 CONN. BODY

M2DG
 CORD

PG GS HS
 TO FIG. F OR G
 TO FIG. I

PG GS HS
 GRD. SIDE BK

HUBBELL
 5264 CAP

WITH PROT.
 GRD. CONN.

FIG. F

HUBBELL
 7059 CAP

PLUGS INTO
 120V. A-C POWER
 SUPPLY ON
 SUBSCRIBER'S
 PREMISES

WITHOUT PROT.
 GRD. CONN.


FIG. G

PG GS HS
 GRD. SIDE BK

16 GA. 3 CONDUC.
 CORDAGE PER
 KS-15143

16 GA. 2 CONDUC.
 CORDAGE PER
 KS-15143

PLUGS INTO
 120V. A-C POWER
 SUPPLY ON
 SUBSCRIBER'S
 PREMISES

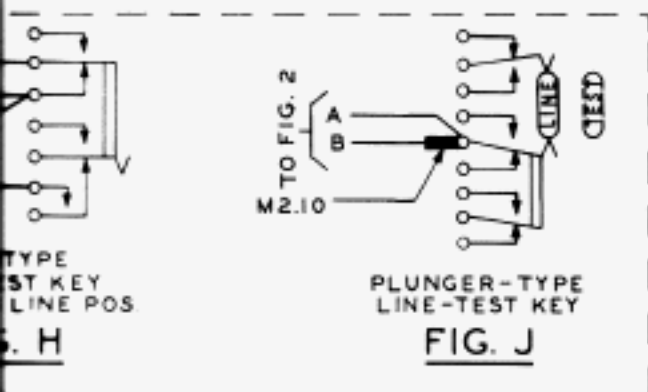


MOTOR	FUSETRON	
	TTY	TABLE
A-C SYNCH	T3.2	T8
A-C SERIES	T1.6	T6.2

TABLE A

PLANS USED	
M3.05	
M2.10*	

* WHEN REQUIRED

NOTES:
1. ALL COLORED WIRES UNLESS OTHERWISE SPECIFIED ARE 22 GAUGE BROWN TYPE GS STATION WIRE, PER AT&TCo. SPEC. 7089.

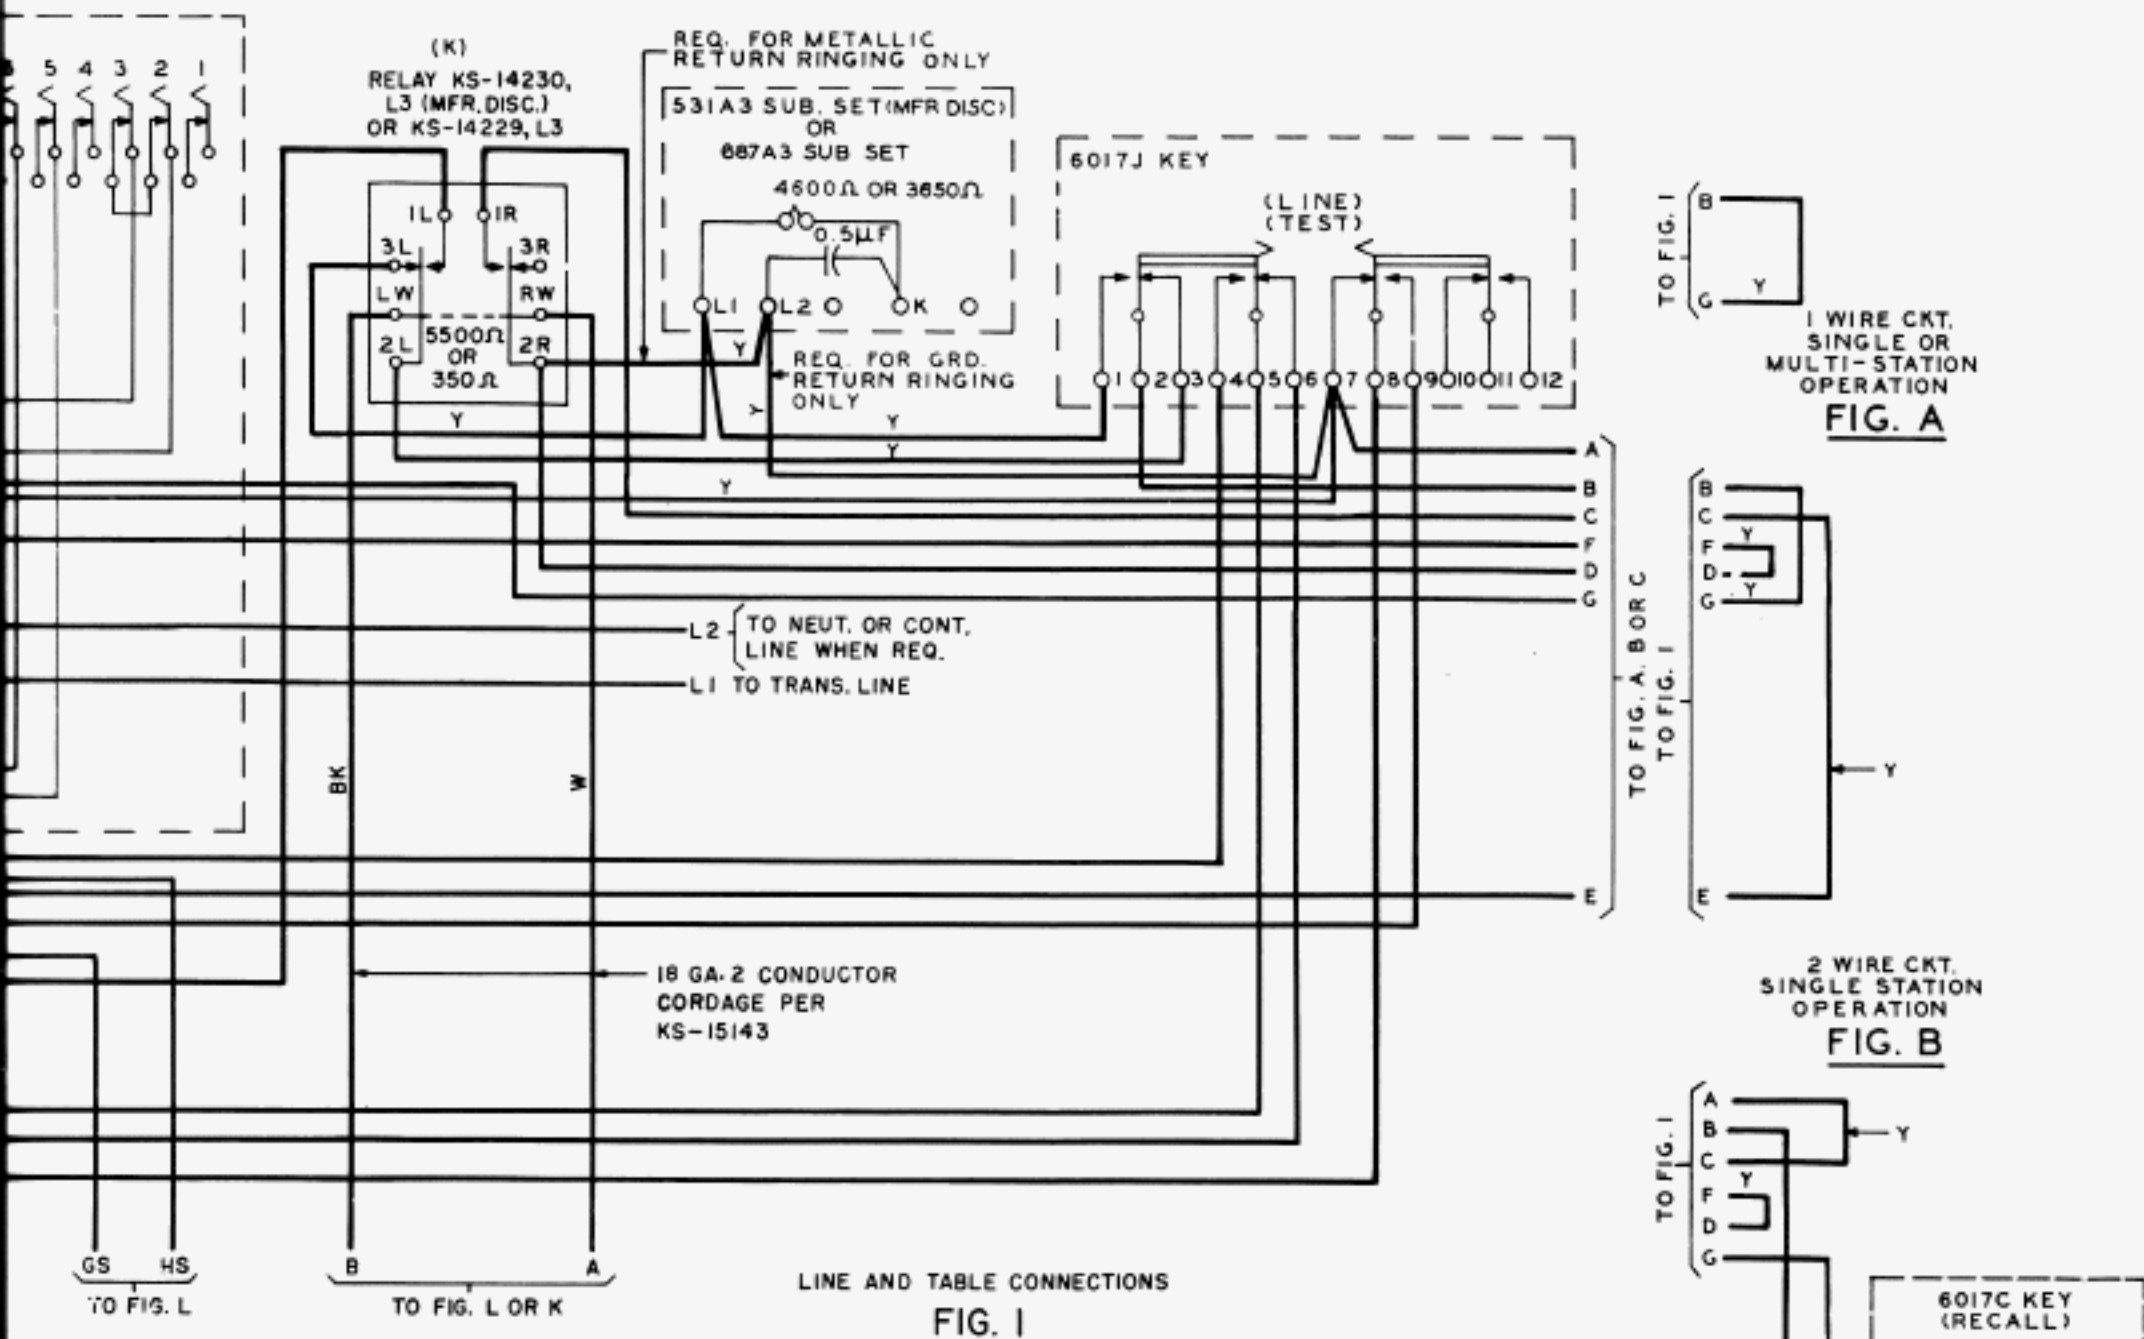

LINE AND TABLE CONNECTIONS
FIG. 1




FIG. A

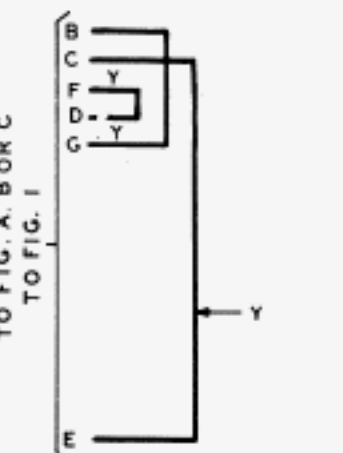


FIG. B




FIG. C

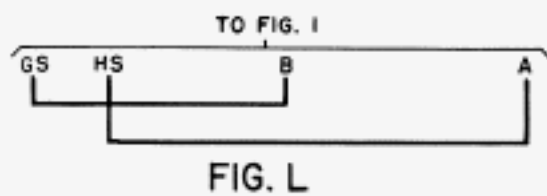


FIG. L

FR. DISC.)

128C3 TTY SUB. SET
ATTENDED TWX SERVICE
19A TTY TABLE