


128C3 TTY SUB. SET

19 TTY CONSISTING OF:
 15C BASE
 15Y OR 15AA TYPING UNIT
 15L38 OR 15T38 PERFORATOR TRANSMITTER
 15D, 15J OR 15L MOTOR UNIT

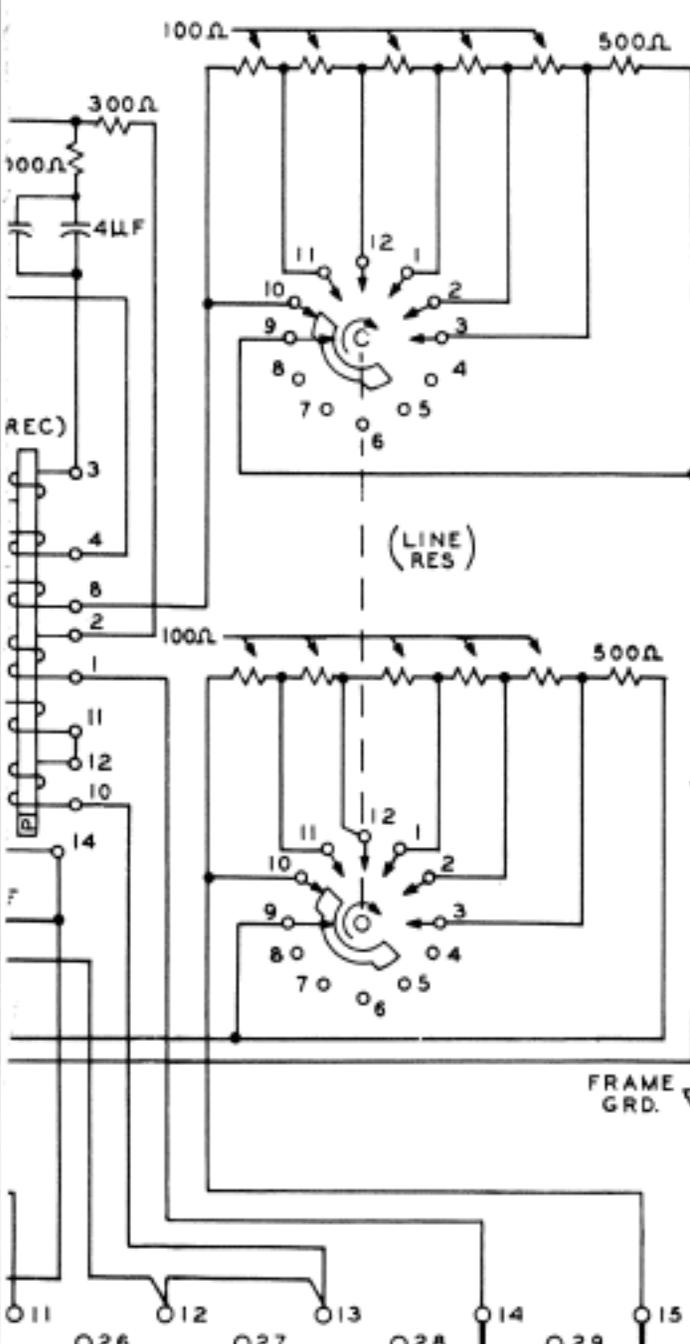

OMIT WHEN PROT. GRD. IS NOT FURNISHED






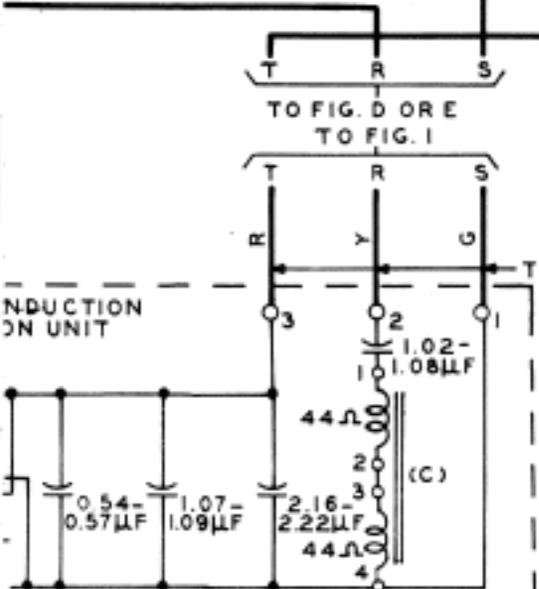


FIG. E

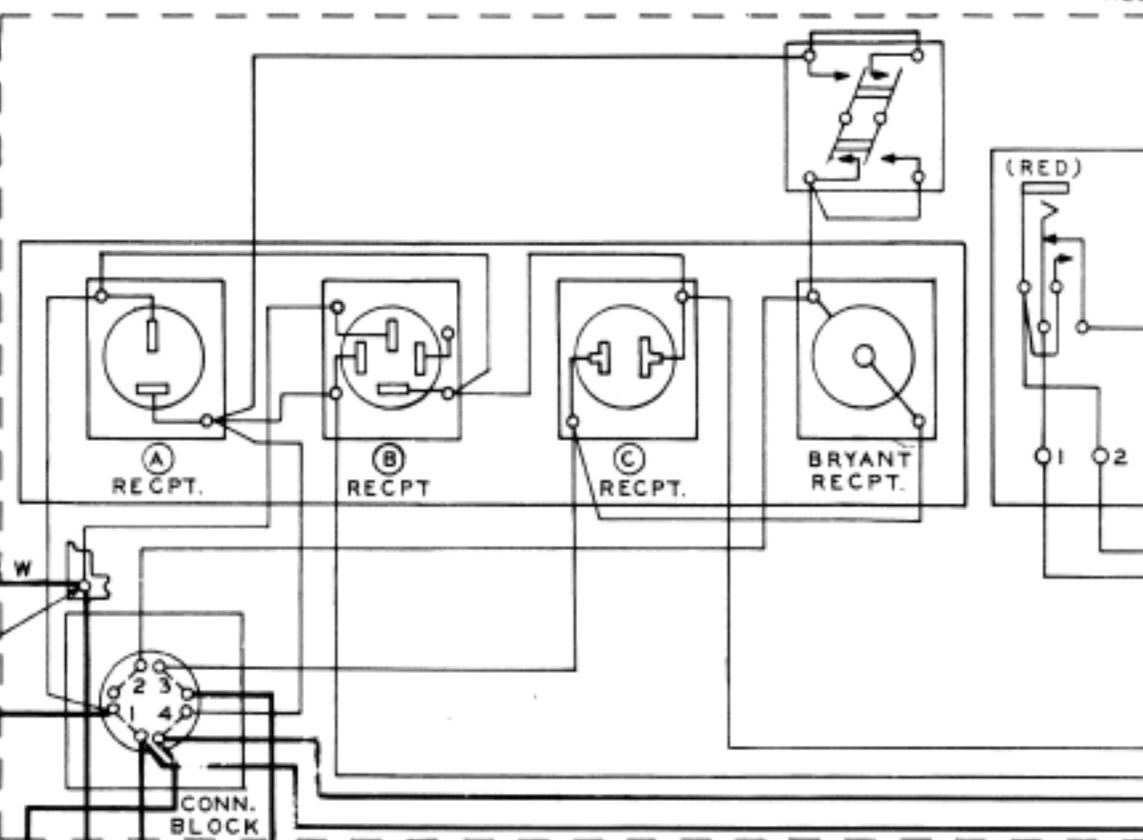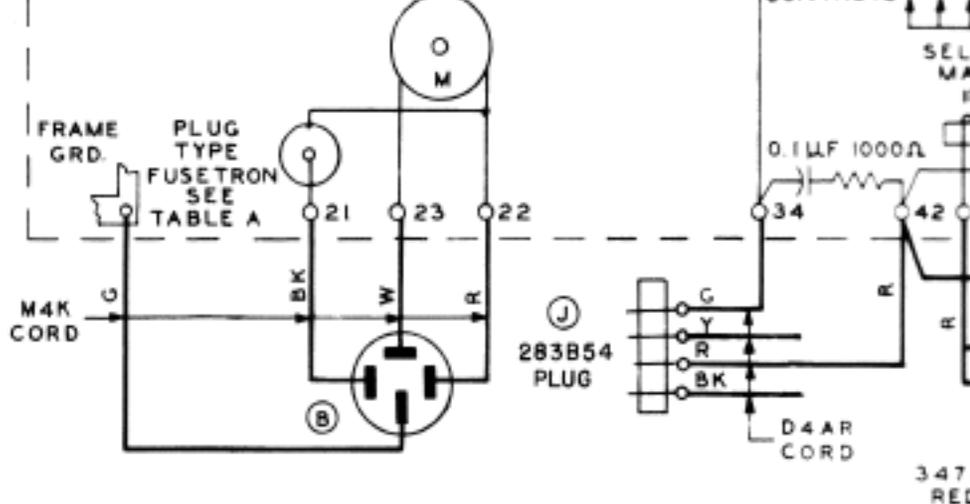
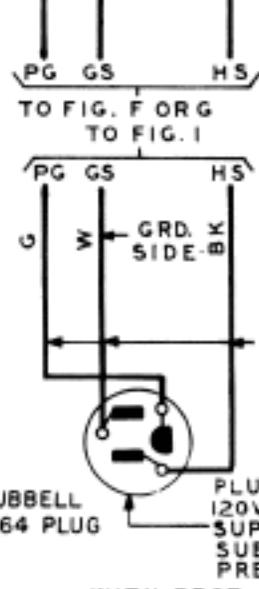



WITH PROT. GRD. CONN.
 FIG. F

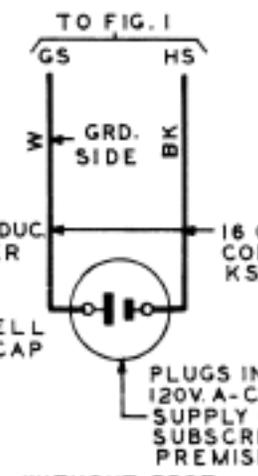

WITHOUT PROT. GRD. CONN.
 FIG. G



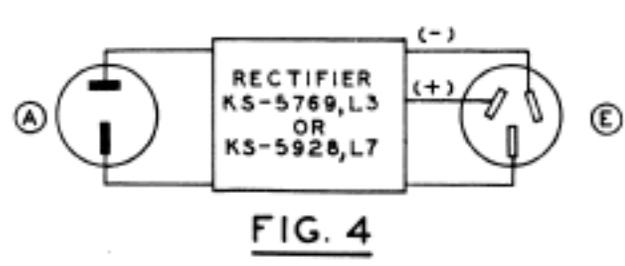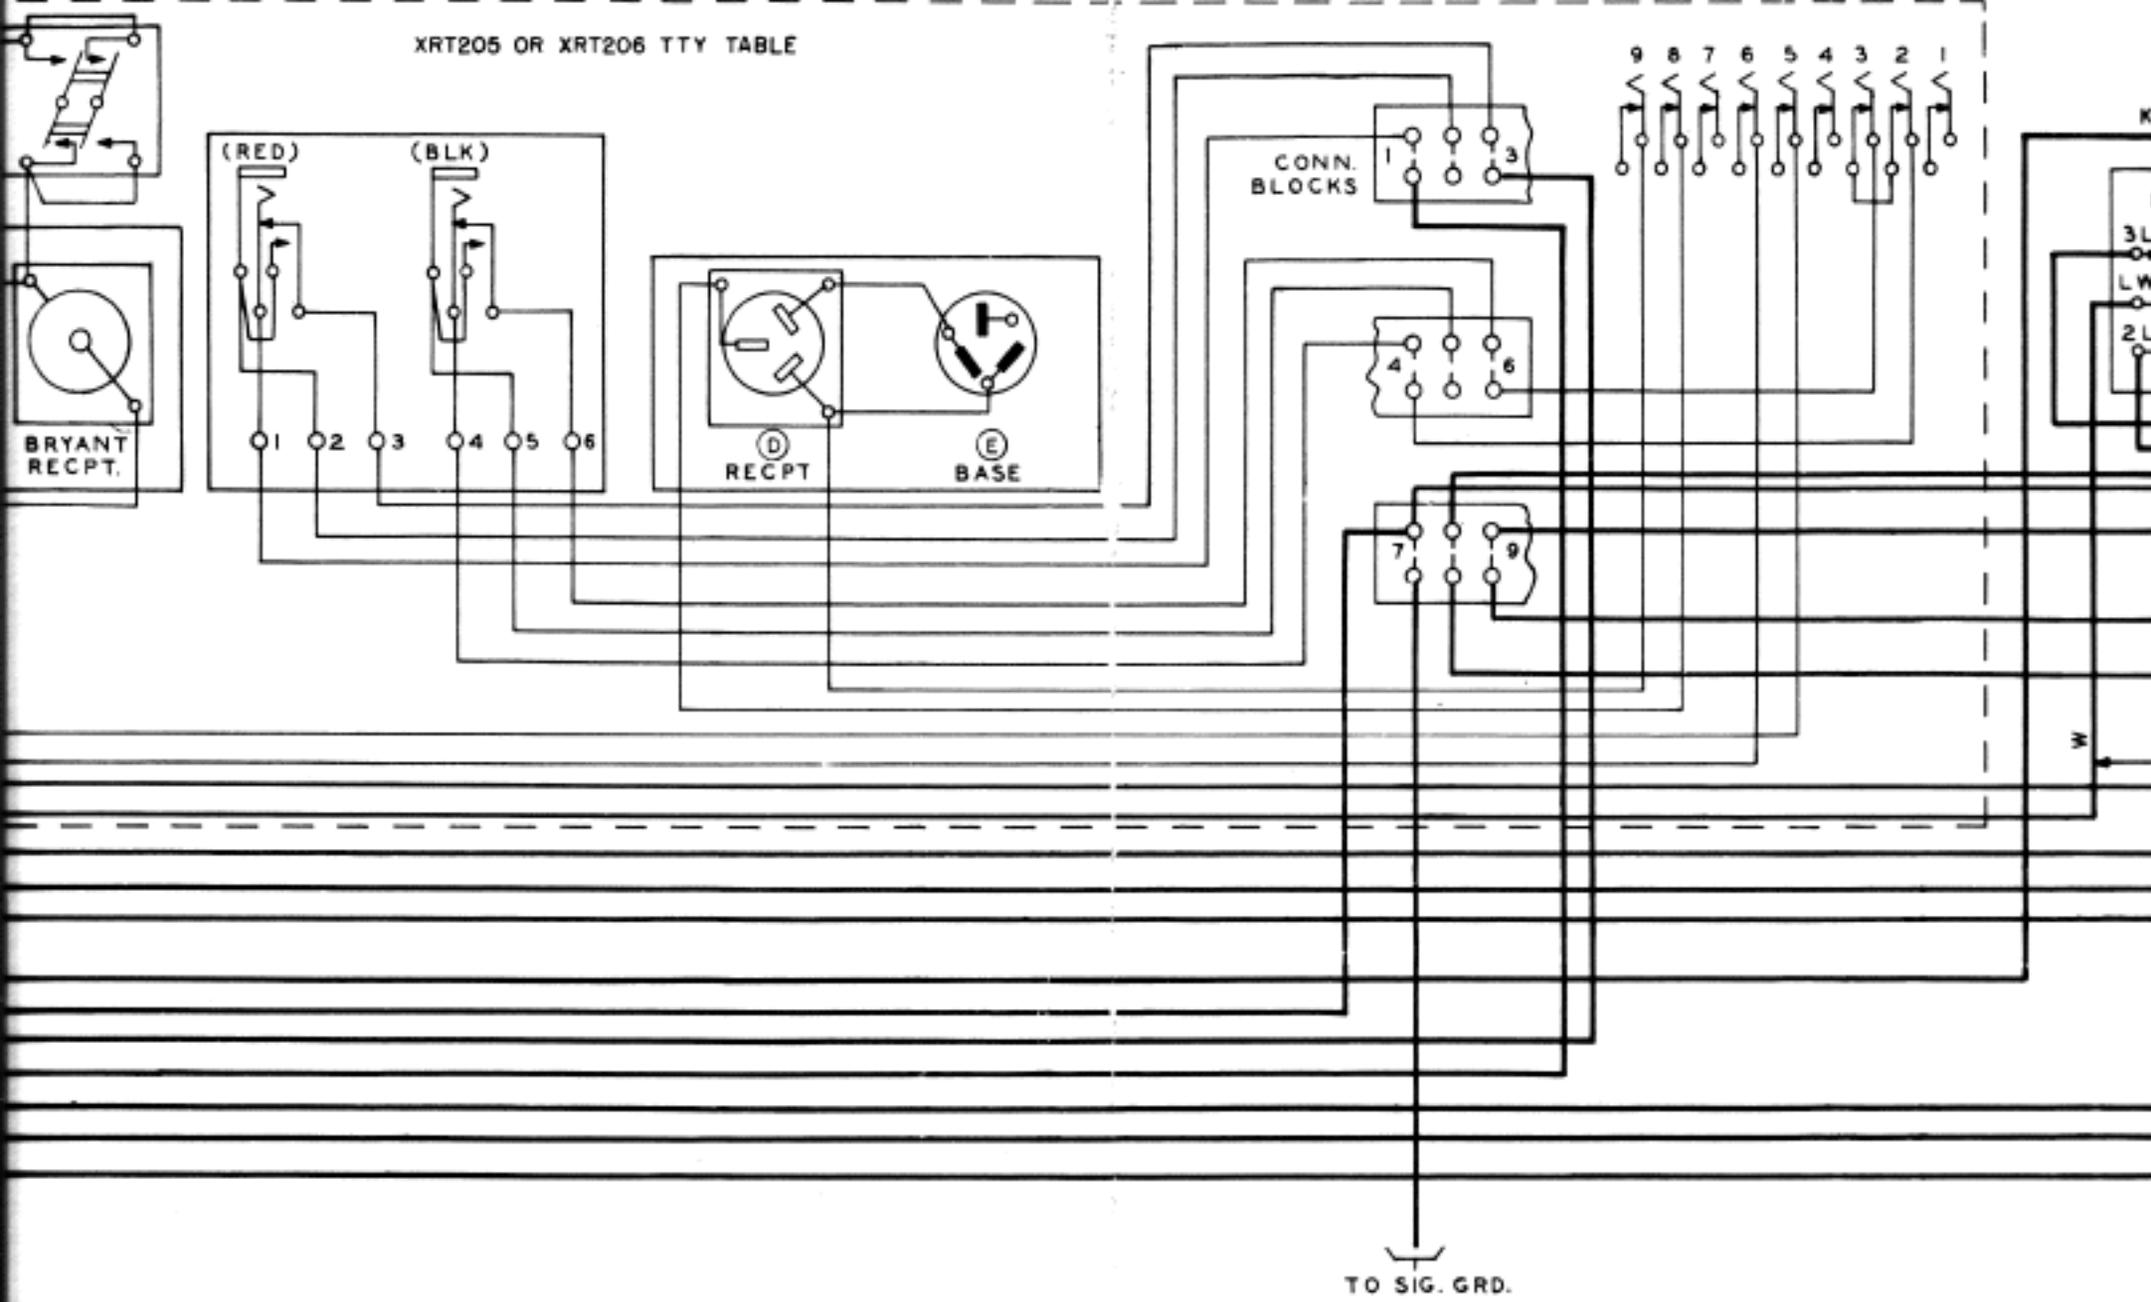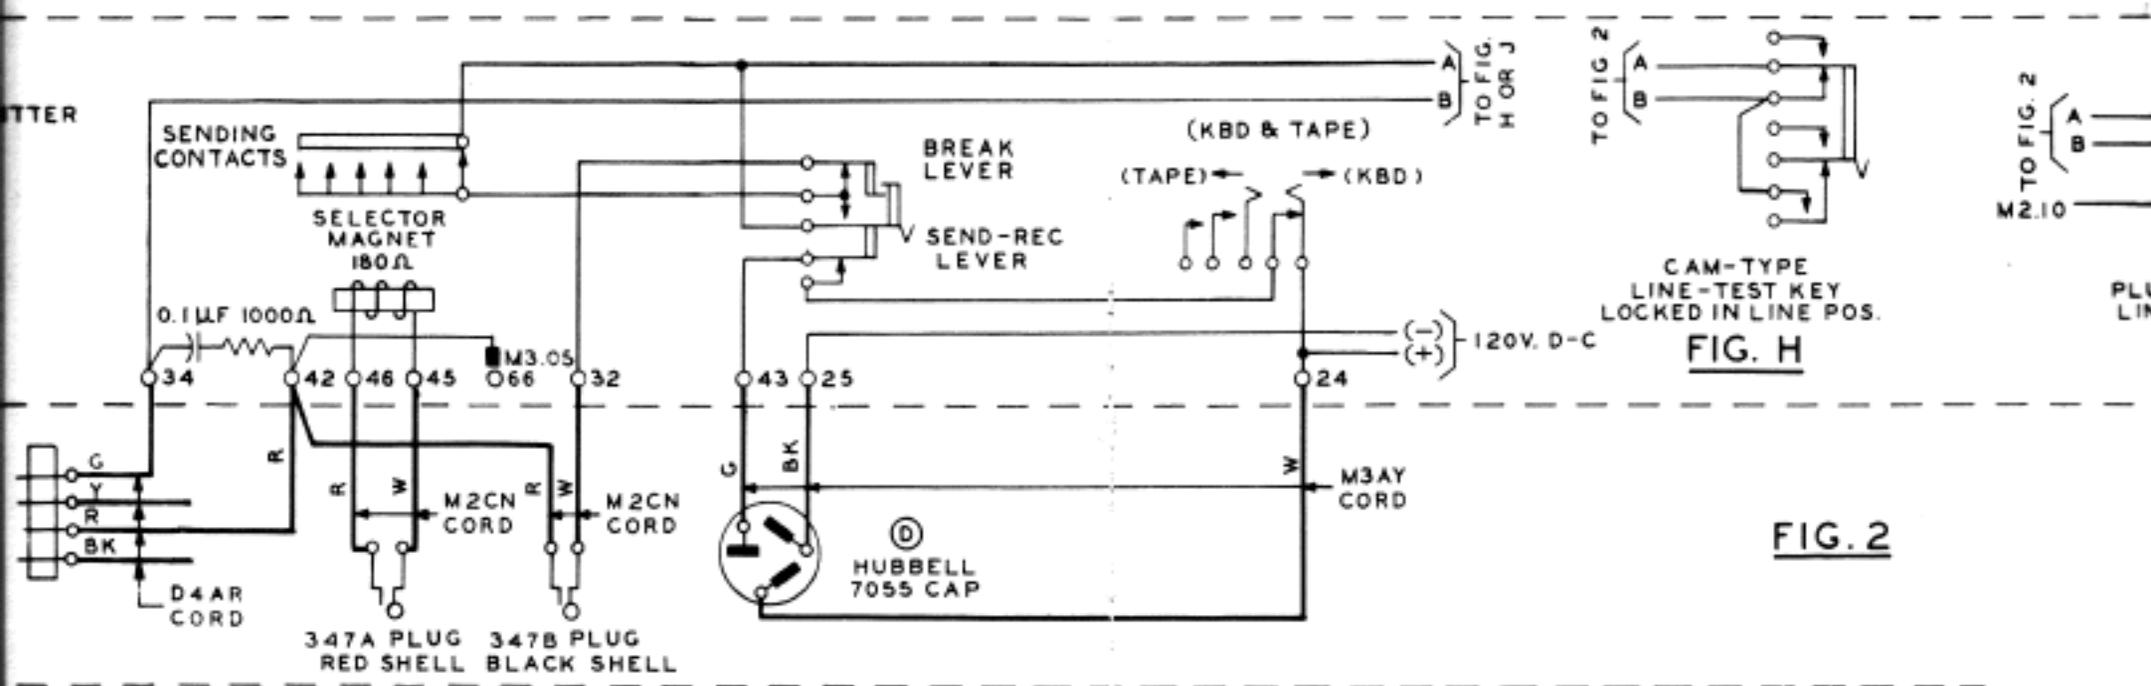

2 CONDUCT.
 GE. PER
 43
 VER
 PS

MOTOR	FUSETRON	
	TTY	TABLE
A-C SYNCH	T3.2	T8
A-C SERIES	T1.6	T6.2

TABLE A

PLANS USED	
M3.05	
M2.10*	

* WHEN REQUIRED


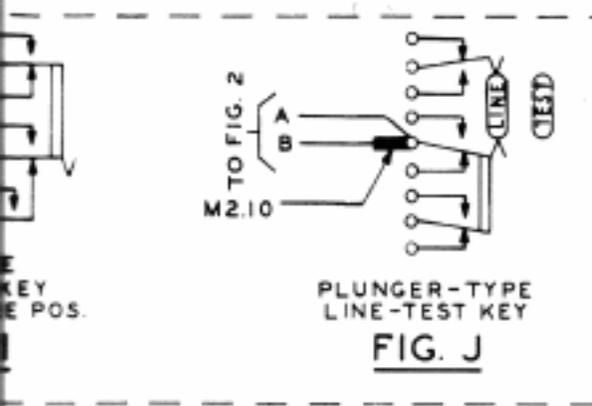


FIG. 2

NOTES:

1. ALL COLORED WIRES UNLESS OTHERWISE SPECIFIED ARE 22 GAUGE BROWN TYPE GS STATION WIRE, PER AT&TCo. SPEC. 7089.

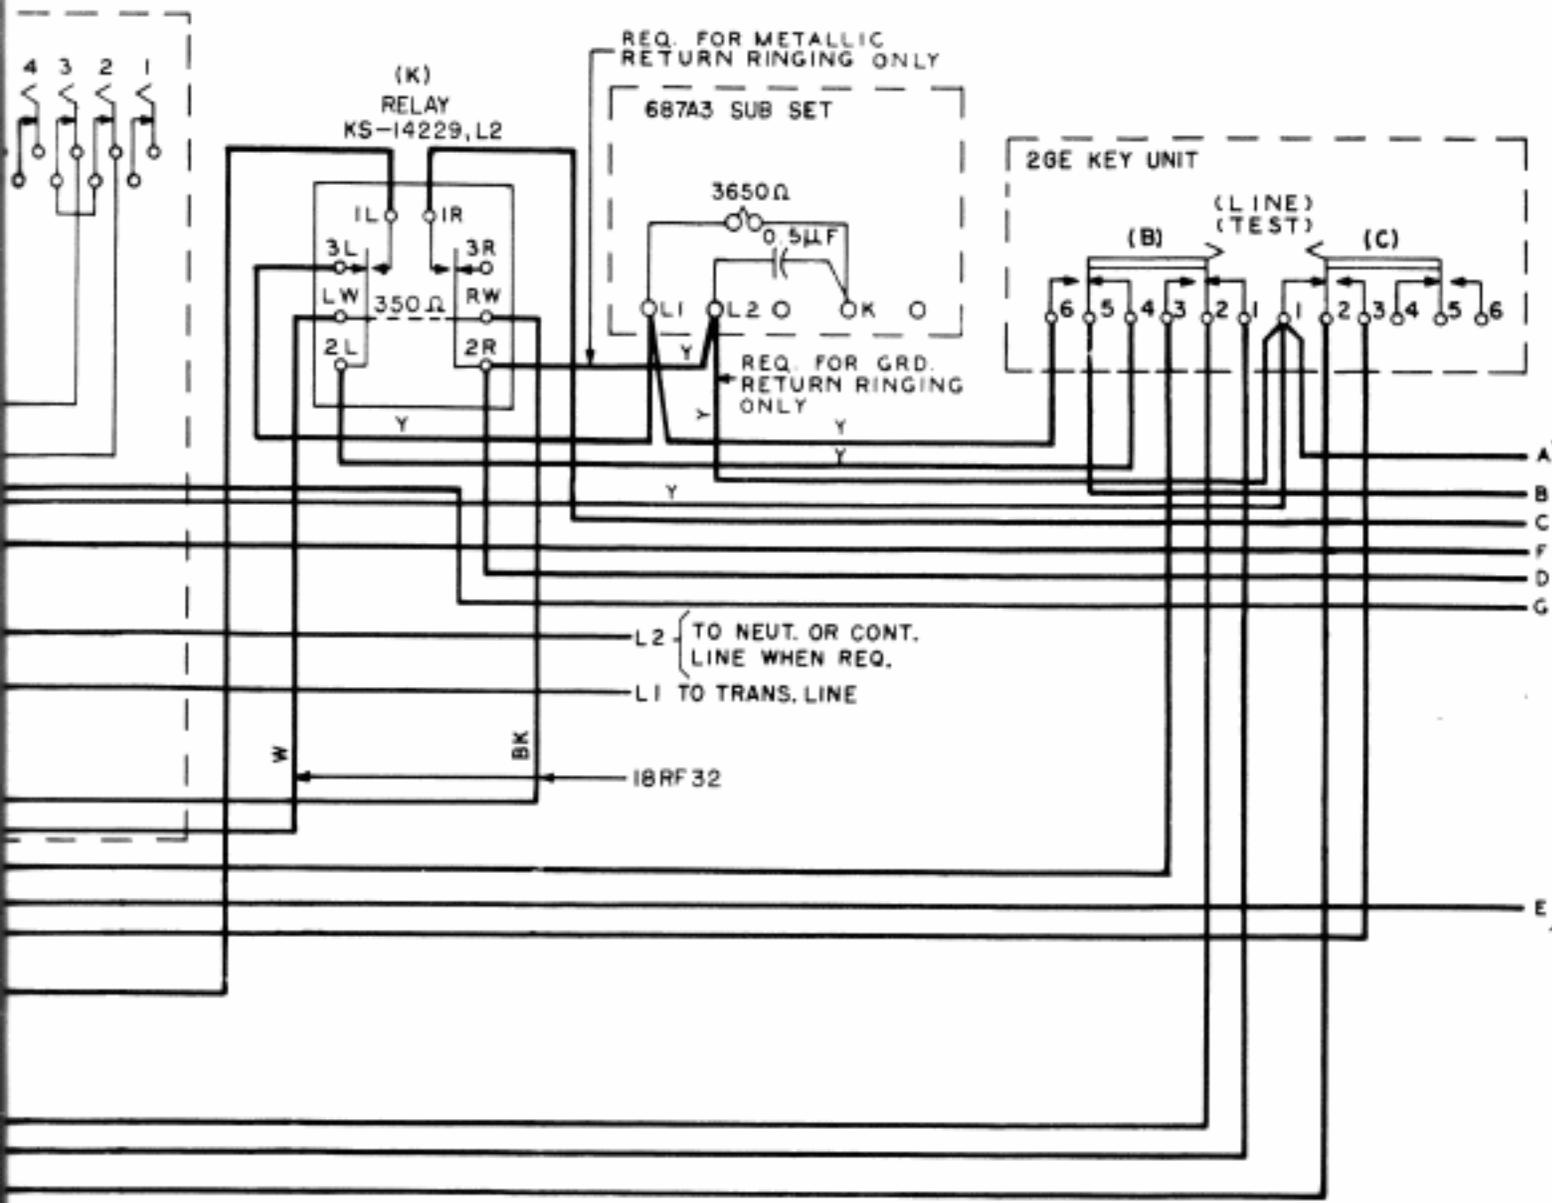

LINE AND TABLE CONNECTIONS
FIG. 1




FIG. A

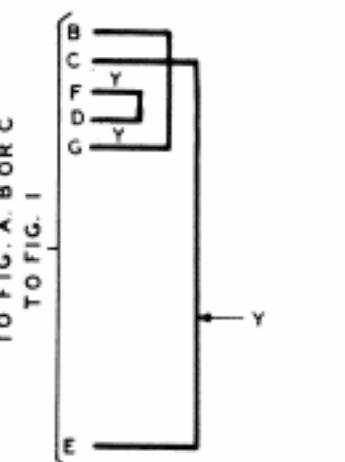


FIG. B

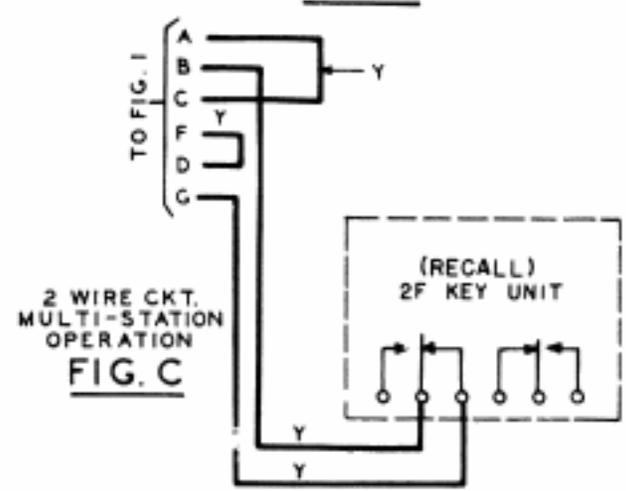


FIG. C

19 TTY
128C3 TTY SUB. SET
ATTENDED TWX SERVICE
XRT205 OR XRT206 TTY TABLE