


BELL SYSTEM PRACTICES
TELETYPEWRITER STATION INSTALLATION AND MAINTENANCE

SECTION P90.904
 Issue A, 2-1-41
 PT&TCO Prov.


PLANS USED	
LS 2.13	M 2.05
P 5.01	M 2.06
PM #03	LT 1.049
PS 1.01	

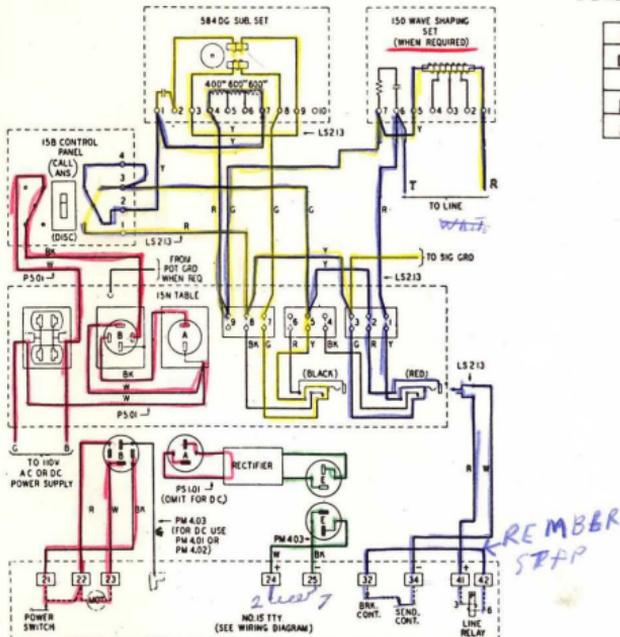


AC OPERATION - POWER CONNECTIONS ARE AS SHOWN ABOVE

Notes WHEN USED WITH NO. 5 OR 3A BOARD WITH AUTOMATIC FLASHING RECALL MODIFY TTY PER M2.05 & M2.06 FOR 60 MIL OPERATION.

DC OPERATION - POWER CONNECTIONS TO TTY ARE AS SHOWN BELOW.



15N TABLE - NEG GROUNDED OR NON GROUNDED 115V D-C - SWITCH MOTOR CONTROL



15N TABLE - POS GROUNDED 115V D-C - SWITCH MOTOR CONTROL

NO. 15 TTY - 15N TABLE WITH 15B CONTROL PANEL.
 LOCAL ATTENDED TWX SERVICE TO NO. 1, 5, AND 3A SWITCHBOARDS WITH AUTOMATIC FLASHING RECALL

POWER 60C
 110AC
 RINGING 90V 20C
 LINE 20 OR 60 mils
 RECTIFIER 130 DC